

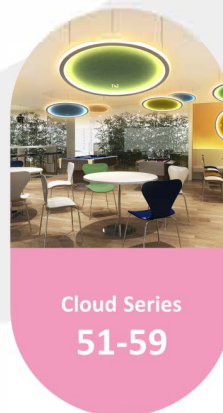
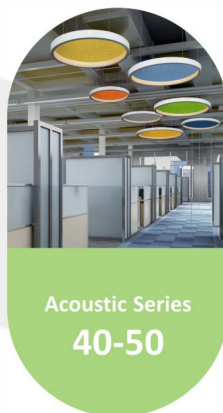
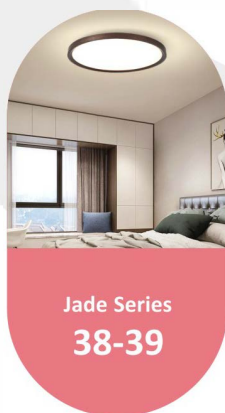
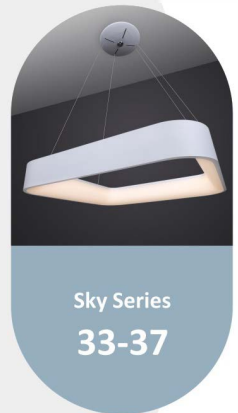
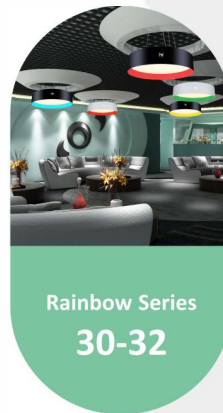
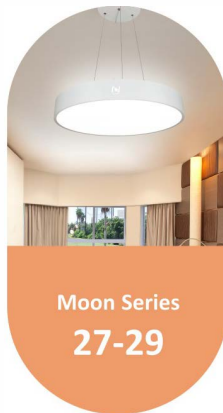
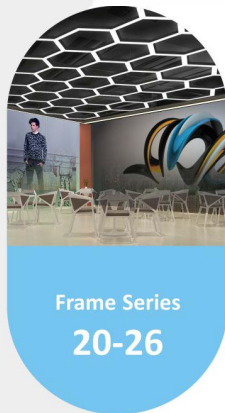


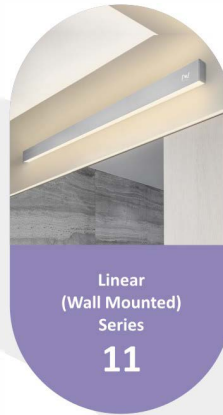

URALED LIGHTING MEXICO SAS DE CV

www.auraled.mx


+529981479072

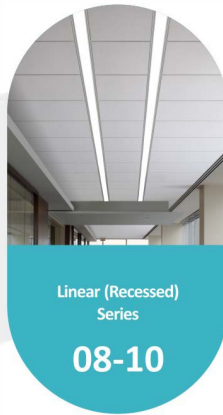

PRODUCT CATALOG

AURALED LIGHTING MEXICO SAS DE CV
www.auraled.mx

**Linear
(Suspended & Mounted)
Series**

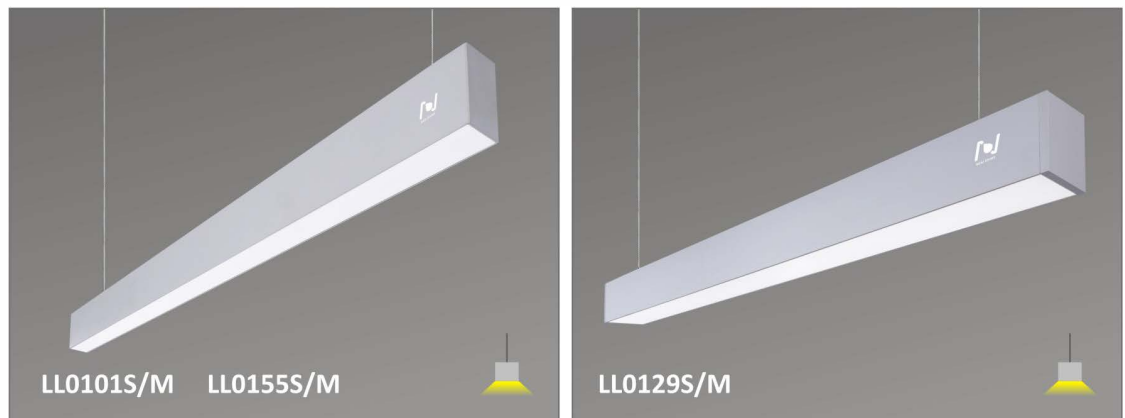


Features:

- Streamline design style, can be seamless connection with any dimension, with an elegant presentation;
- Can be grouped to different patterns to match the architecture style;
- High efficiency and energy saving;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Different profile sizes are available to well light up the space!

Application:

Hotel, hospital, shopping mall, showroom, supermarket, office, KTV, museum, cinema, public buildings, etc.

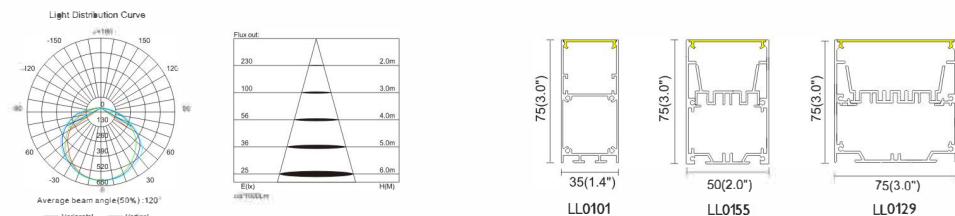

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0101S LL0101M	LL0101S-1200	AC220-240V	36W	≥ 80	3000K/	≥ 0.9	105	Osram	120	Suspended / Mounted	Alu+PC	35*75*1200	1.4*3.0*47.2
	LL0101S-1500	or AC120-277V	50W	or ≥ 90	4000K/							35*75*1500	1.4*3.0*59.1
	LL0101S-2400	50/60Hz	70W		5000K							35*75*2400	1.4*3.0*94.5
LL0155S LL0155M	LL0155S-1200	AC220-240V	40W	≥ 80	3000K/	≥ 0.9	105	Osram	120	Suspended / Mounted	Alu+PC	50*75*1200	2.0*3.0*47.2
	LL0155S-1500	or AC120-277V	50W	or ≥ 90	4000K/							50*75*1500	2.0*3.0*59.1
	LL0155S-2400	50/60Hz	80W		5000K							50*75*2400	2.0*3.0*94.5
LL0129S LL0129M	LL0129S-1200	AC220-240V	50W	≥ 80	3000K/	≥ 0.9	105	Osram	120	Suspended / Mounted	Alu+PC	75*75*1200	3.0*3.0*47.2
	LL0129S-1500	or AC120-277V	70W	or ≥ 90	4000K/							75*75*1500	3.0*3.0*59.1
	LL0129S-2400	50/60Hz	100W		5000K							75*75*2400	3.0*3.0*94.5






OSRAM

SAMSUNG





CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficacy(LM/W): 105
 LED type: Osram
 Beam(degree): 120
 Installation: Suspended / Mounted
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) W*H*L	Size(Inch) W*H*L
LL01265/M-1200	60W	AC220-240V or AC120-277V 50/60Hz	100*70*1200	3.9*2.8*47.2
LL01265/M-1500	100W		100*70*1500	3.9*2.8*59.1
LL01265/M-2400	120W		100*70*2400	3.9*2.8*94.5
LL01305/M-1200	60W	AC220-240V or AC120-277V 50/60Hz	120*70*1200	4.7*2.8*47.2
LL01305/M-1500	100W		120*70*1500	4.7*2.8*59.1
LL01305/M-2400	120W		120*70*2400	4.7*2.8*94.5



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficacy(LM/W): 80
 LED type: Osram
 Beam(degree): 15/24/36
 Installation: Suspended / Mounted
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm) W*H*L	Size(Inch) W*H*L
LL01925/M-1200	36W	AC220-240V or AC120-277V 50/60Hz	16*70*1200	0.6*2.8*47.2
LL01925/M-1500	50W		16*70*1500	0.6*2.8*59.1
LL01925/M-2400	70W		16*70*2400	0.6*2.8*94.5









Linear (Suspended and Mounted) Series



Up and Down






Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0120S LL0120M	LL0120S-1200	AC220-240V or AC120-277V 50/60Hz	50W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120*2	Suspended / Mounted	Alu+PC	50*90*1200	2.0*3.5*47.2
	LL0120S-1500		70W	≥ 80 or ≥ 90								50*90*1500	2.0*3.5*59.1
	LL0120S-2400		100W	≥ 80 or ≥ 90								50*90*2400	2.0*3.5*94.5
LL0124S LL0124M	LL0124S-1200	AC220-240V or AC120-277V 50/60Hz	60W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120*2	Suspended / Mounted	Alu+PC	65*95*1200	2.6*3.7*47.2
	LL0124S-1500		100W	≥ 80 or ≥ 90								65*95*1500	2.6*3.7*59.1
	LL0124S-2400		120W	≥ 80 or ≥ 90								65*95*2400	2.6*3.7*94.5
LL0178S LL0178M	LL0178S-1200	AC220-240V or AC120-277V 50/60Hz	60W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120*2	Suspended / Mounted	Alu+PC	75*95*1200	3.0*3.7*47.2
	LL0178S-1500		100W	≥ 80 or ≥ 90								75*95*1500	3.0*3.7*59.1
	LL0178S-2400		120W	≥ 80 or ≥ 90								75*95*2400	3.0*3.7*94.5




OSRAM


SAMSUNG



LL0134




LL0135



LL0137


Model	Art. No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0134RS LL0134RM	LL0134RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	Suspended / Mounted	Alu+PC	35*35*1200	1.4*1.4*47.2
	LL0134RS-1500		36W									35*35*1500	1.4*1.4*59.1
	LL0134RS-2400		50W									35*35*2400	1.4*1.4*94.5
LL0135RS LL0135RM	LL0135RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	Suspended / Mounted	Alu+PC	50*35*1200	2.0*1.4*47.2
	LL0135RS-1500		36W									50*35*1500	2.0*1.4*59.1
	LL0135RS-2400		50W									50*35*2400	2.0*1.4*94.5
LL0137RS LL0137RM	LL0137RS-1200	AC220-240V or AC120-277V 50/60Hz	36W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	Suspended / Mounted	Alu+PC	80*35*1200	3.1*1.4*47.2
	LL0137RS-1500		60W									80*35*1500	3.1*1.4*59.1
	LL0137RS-2400		70W									80*35*2400	3.1*1.4*94.5

Linear (Suspended and Mounted) Series

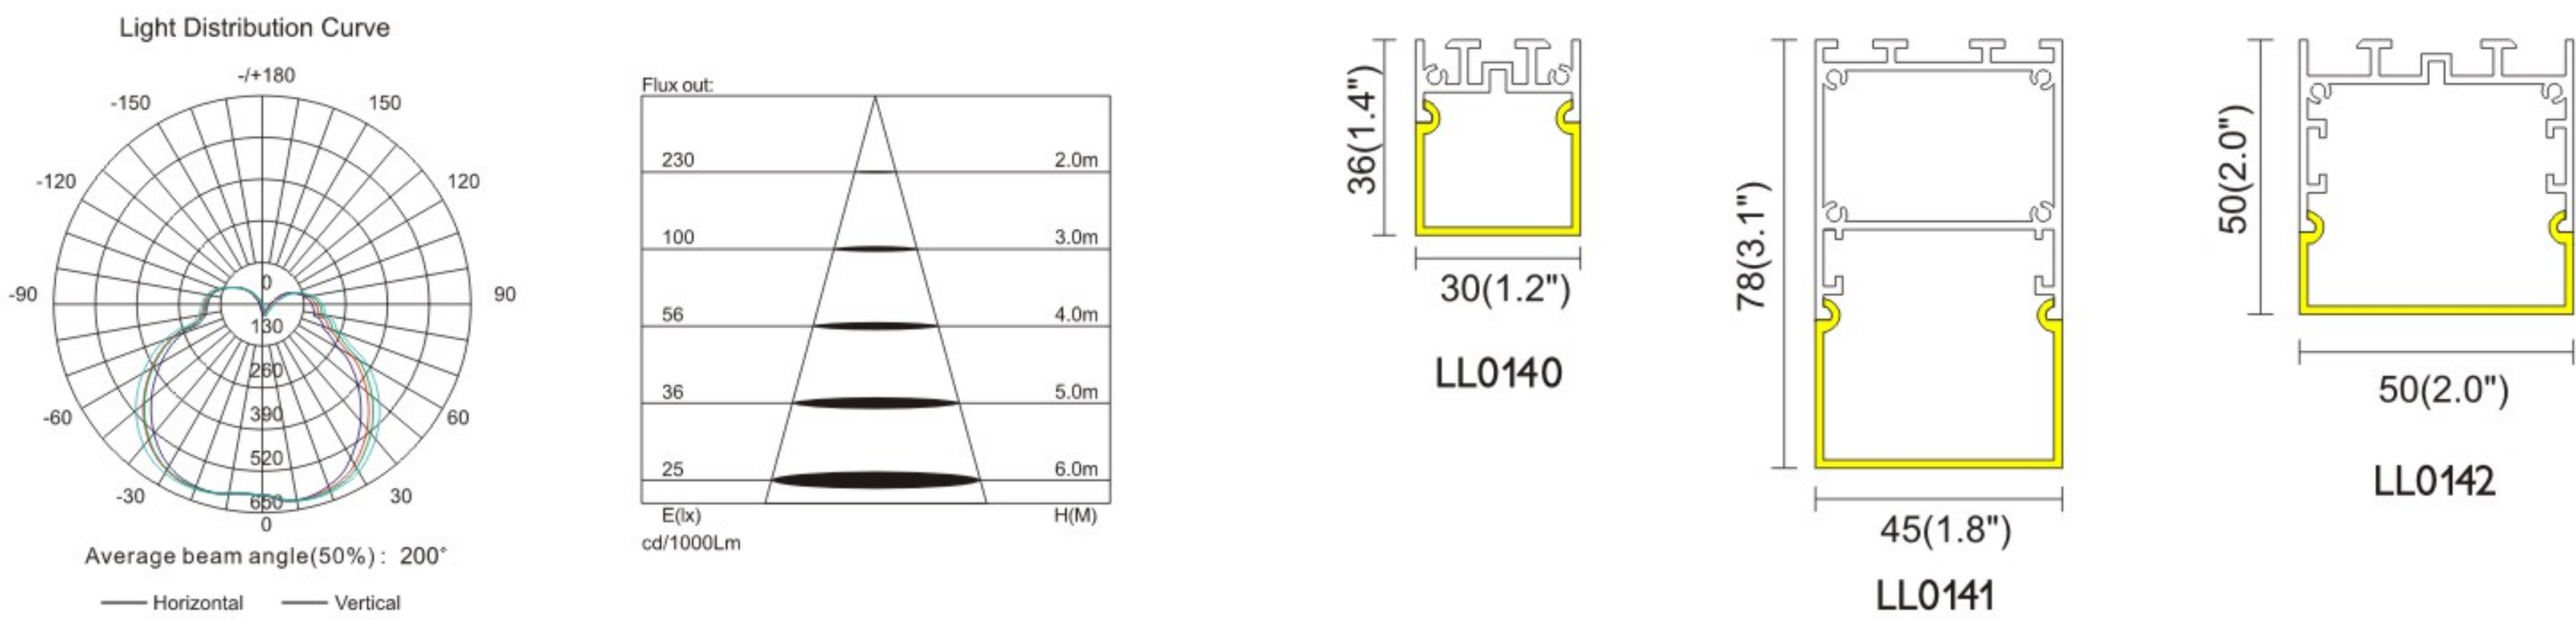

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0140RS LL0140RM	LL0140RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≧ 80 or ≧ 90	3000K/ 4000K/ 5000K	≧ 0.9	105	Osram	200	Suspended / Mounted	Alu+PC	30*36*1200	1.2*1.4*47.2
	LL0140RS-1500		36W									30*36*1500	1.2*1.4*59.1
	LL0140RS-2400		50W									30*36*2400	1.2*1.4*94.5
LL0141RS LL0141RM	LL0141RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≧ 80 or ≧ 90	3000K/ 4000K/ 5000K	≧ 0.9	105	Osram	200	Suspended / Mounted	Alu+PC	45*78*1200	1.8*3.1*47.2
	LL0141RS-1500		36W									45*78*1500	1.8*3.1*59.1
	LL0141RS-2400		50W									45*78*2400	1.8*3.1*94.5
LL0142RS LL0142RM	LL0142RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≧ 80 or ≧ 90	3000K/ 4000K/ 5000K	≧ 0.9	105	Osram	200	Suspended / Mounted	Alu+PC	50*50*1200	2.0*2.0*47.2
	LL0142RS-1500		36W									50*50*1500	2.0*2.0*59.1
	LL0142RS-2400		50W									50*50*2400	2.0*2.0*94.5

Linear (Suspended and Mounted) Series

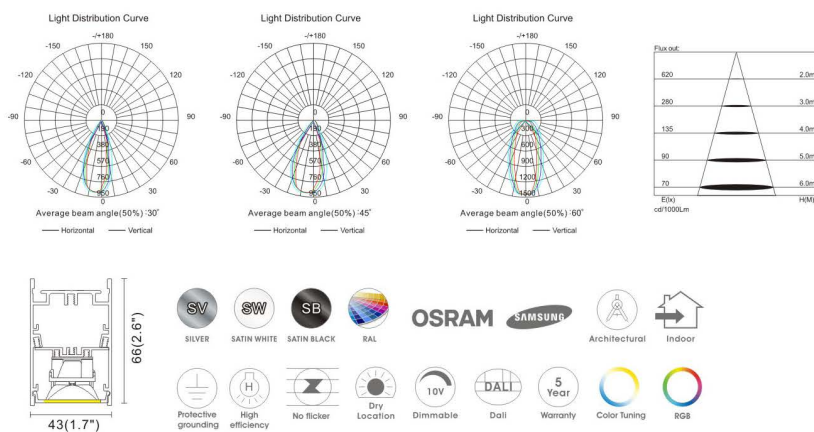

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0108S LL0108M	LL0108S-1200	AC220-240V or AC120-277V 50/60Hz	36W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	80	Osram	30/45/60	Suspended / Mounted	Alu+ PMMA	43*66*1200	1.7*2.6*47.2
	LL0108S-1500		50W	or ≥ 90								43*66*1500	1.7*2.6*59.1
	LL0108S-2400		70W									43*66*2400	1.7*2.6*94.5






Linear (Recessed) Series

Features:

- Streamline design style, can be seamless connection with any dimension, with an elegant presentation;
- Can be grouped to different patterns to match the architecture style;
- High efficiency and energy saving;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Different profile sizes are available to well light up the space!

Application:

Hotel, hospital, shopping mall, showroom, supermarket, office, KTV, museum, cinema, public buildings, etc.



Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0105R	LL0105R-1200	AC220-240V or AC120-277V 50/60Hz	25W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120	Recessed	Alu+PC	50*30*1200	2.0*1.2*47.2
	LL0105R-1500		36W	≥ 80 or ≥ 90								50*30*1500	2.0*1.2*59.1
	LL0105R-2400		50W	≥ 80 or ≥ 90								50*30*2400	2.0*1.2*94.5
LL0106R	LL0106R-1200	AC220-240V or AC120-277V 50/60Hz	36W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120	Recessed	Alu+PC	65*35*1200	2.6*1.4*47.2
	LL0106R-1500		50W	≥ 80 or ≥ 90								65*35*1500	2.6*1.4*59.1
	LL0106R-2400		70W	≥ 80 or ≥ 90								65*35*2400	2.6*1.4*94.5
LL0147R	LL0147R-1200	AC220-240V or AC120-277V 50/60Hz	40W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120	Recessed	Alu+PC	95*35*1200	3.7*1.4*47.2
	LL0147R-1500		60W	≥ 80 or ≥ 90								95*35*1500	3.7*1.4*59.1
	LL0147R-2400		80W	≥ 80 or ≥ 90								95*35*2400	3.7*1.4*94.5










Features:



- Streamline design style, can be seamless connection with any dimension, with an elegant presentation;
- Can be grouped to different patterns to match the architecture style;
- High efficiency and energy saving;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Different profile sizes are available to well light up the space!

Application:



Hotel, hospital, shopping mall, showroom, supermarket, office, KTV, museum, cinema, public buildings, etc.

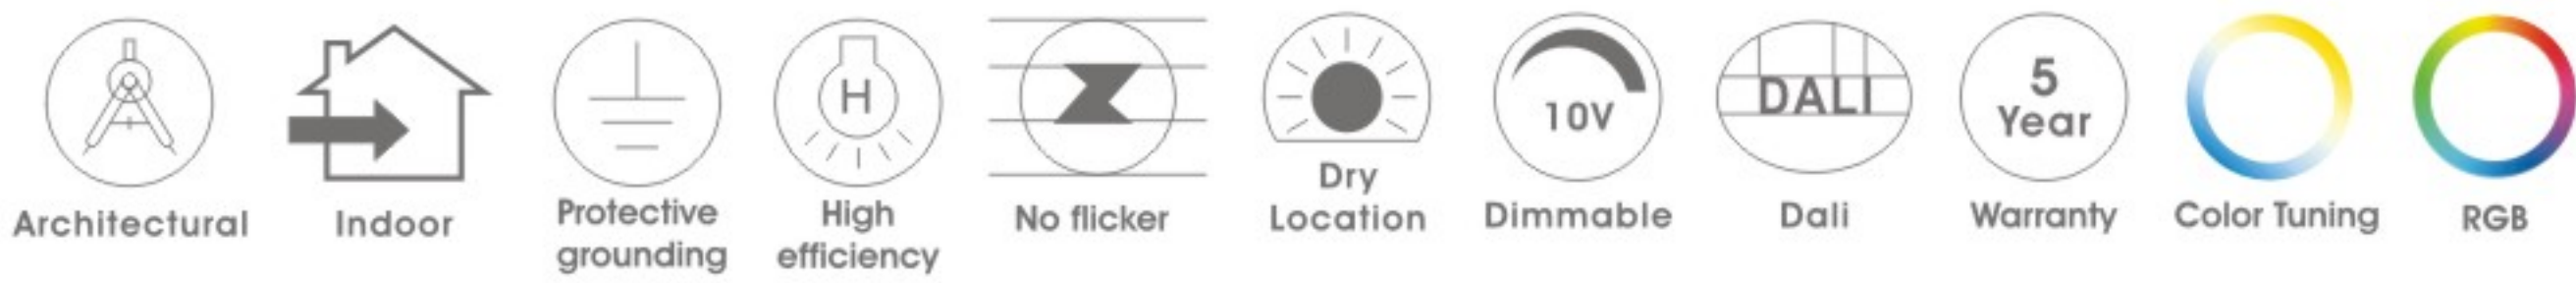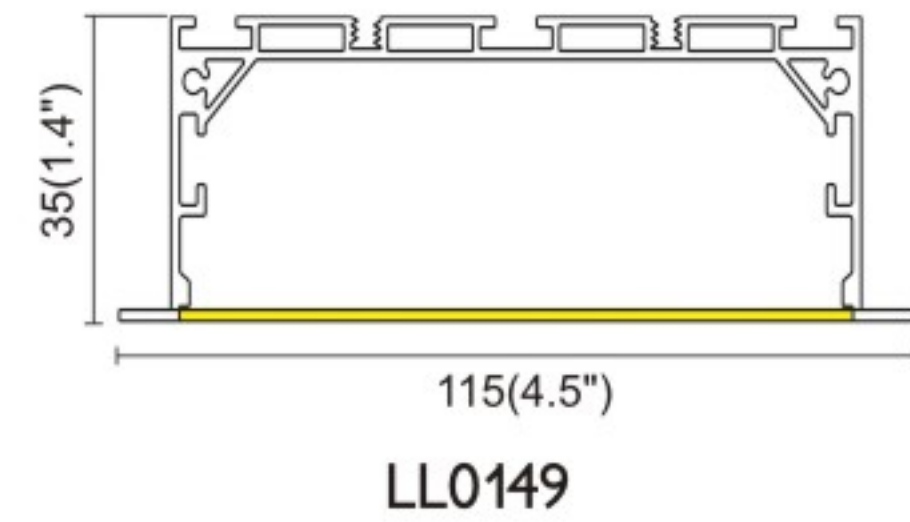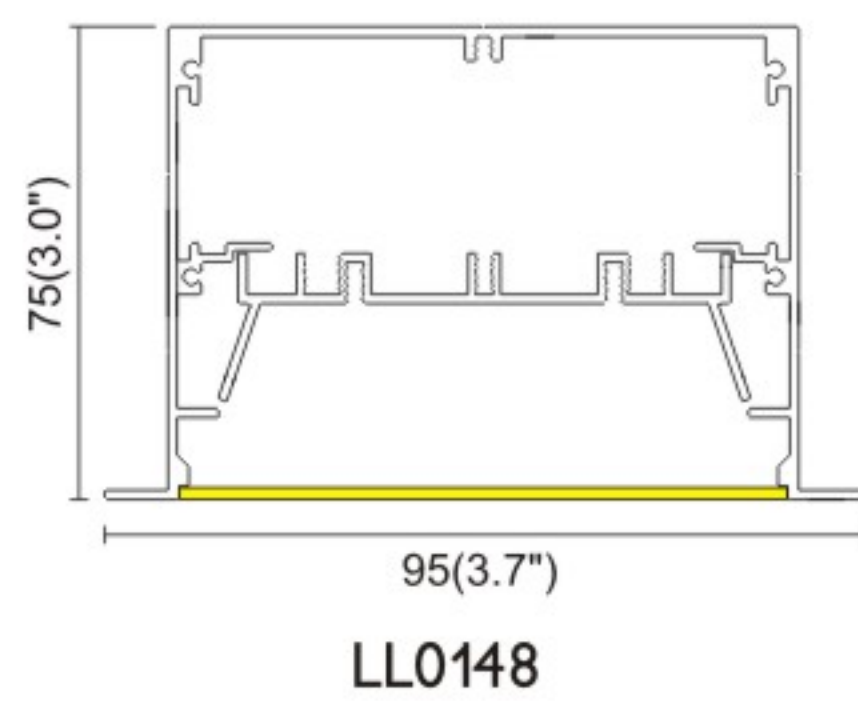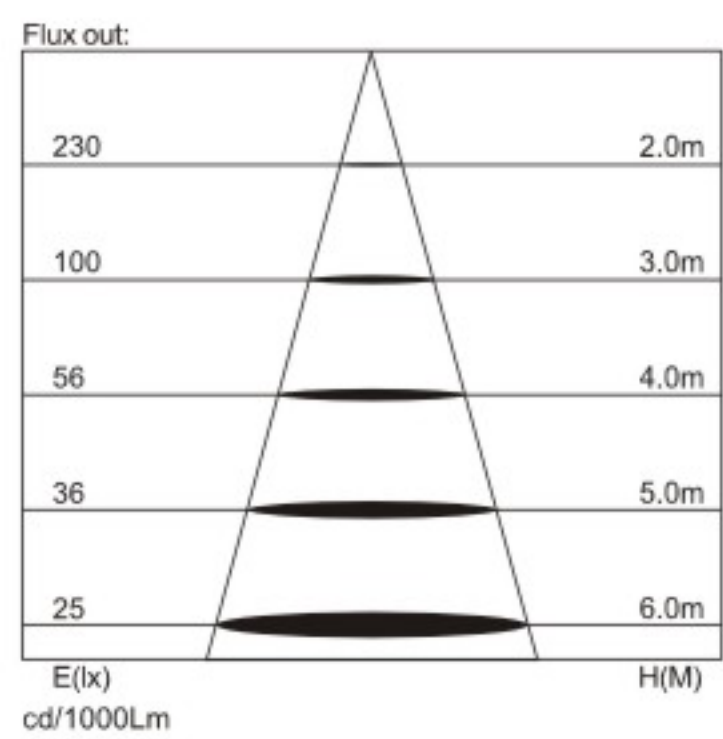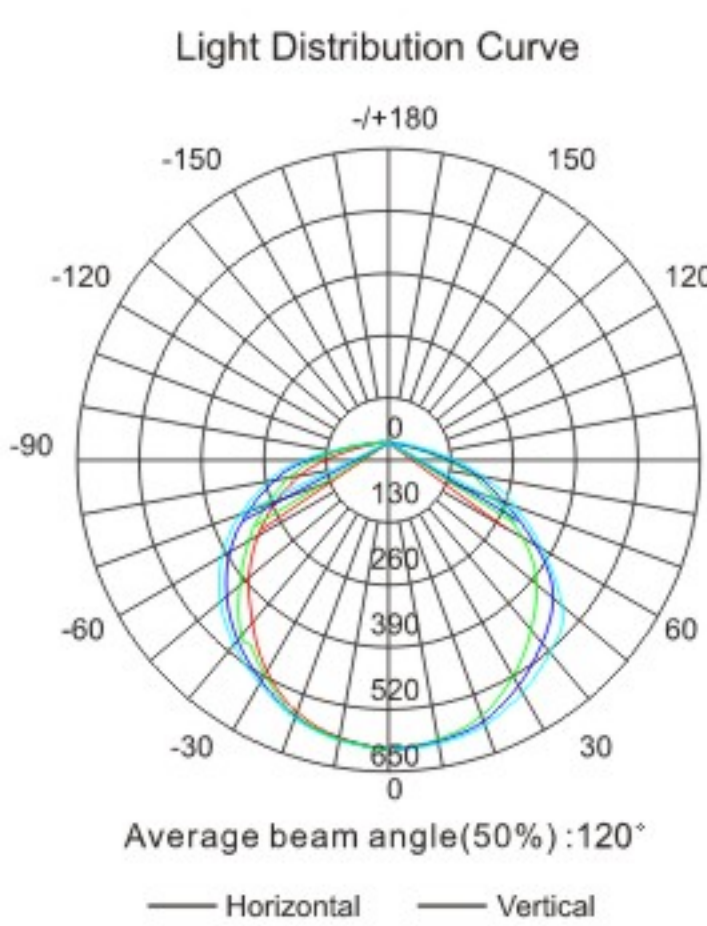

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0148R	LL0148R-1200	AC220-240V or AC120-277V 50/60Hz	50W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120	Recessed	Alu+PC	95*75*1200	3.7*3.0*47.2
	LL0148R-1500		70W									95*75*1500	3.7*3.0*59.1
	LL0148R-2400		100W									95*75*2400	3.7*3.0*94.5
LL0149R	LL0149R-1200	AC220-240V or AC120-277V 50/60Hz	50W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120	Recessed	Alu+PC	115*35*1200	4.5*1.4*47.2
	LL0149R-1500		80W									115*35*1500	4.5*1.4*59.1
	LL0149R-2400		100W									115*35*2400	4.5*1.4*94.5




OSRAM SAMSUNG



Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0120W	LL0120W-1200	AC220-240V or AC120-277V 50/60Hz	50W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≈ 0.9	105lm/w	Osram	120*2	wall mounted	Alu+PC	50*90*1200	2.0*3.5*47.2
	LL0120W-1500		70W	≥ 80 or ≥ 90								50*90*1500	2.0*3.5*59.1
	LL0120W-2400		100W	≥ 80 or ≥ 90								50*90*2400	2.0*3.5*94.5
LL0124W	LL0124W-1200	AC220-240V or AC120-277V 50/60Hz	60W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≈ 0.9	105lm/w	Osram	120*2	wall mounted	Alu+PC	65*95*1200	2.6*3.7*47.2
	LL0124W-1500		100W	≥ 80 or ≥ 90								65*95*1500	2.6*3.7*59.1
	LL0124W-2400		120W	≥ 80 or ≥ 90								65*95*2400	2.6*3.7*94.5
LL0146W	LL0146W-1200	AC220-240V or AC120-277V 50/60Hz	50W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≈ 0.9	105lm/w	Osram	120*2	wall mounted	Alu+PC	43*90*1200	1.7*3.5*47.2
	LL0146W-1500		70W	≥ 80 or ≥ 90								43*90*1500	1.7*3.5*59.1
	LL0146W-2400		100W	≥ 80 or ≥ 90								43*90*2400	1.7*3.5*94.5






Ring Series

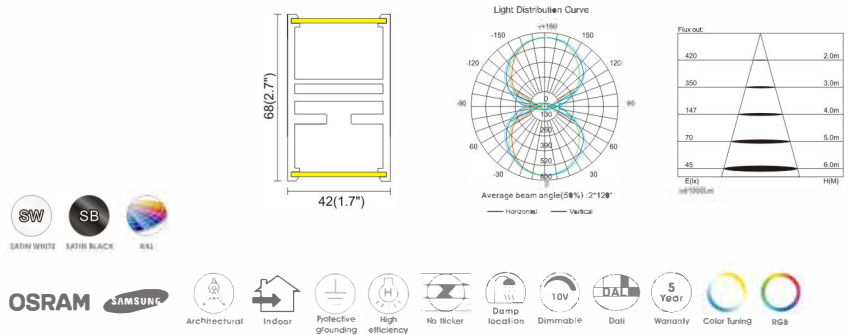

Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) D*W*H	Size(Inch) D*W*H
LL011SUD5-80W	AC220-240V or AC120-277V 50/60Hz	80W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	85	Samsung	120°	Suspended	Alu+PC	D900*42*68	D35.4*1.7*2.7
LL011SUD5-120W		120W									D1200*42*68	D47.2*1.7*2.7
LL011SUD5-135W		135W									D1500*42*68	D59.1*1.7*2.7
LL011SUD5-150W		150W									D2000*42*68	D78.7*1.7*2.7
LL011SUD5-300W		300W									D3000*42*68	D118.1*1.7*2.7
LL011SUD5-480W		480W									D5000*42*68	D196.9*1.7*2.7

Ring Series



OSRAM SAMSUNG



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) D*W*H	Size(Inch) D*W*H
LL0113S/M-40W	AC220-240V or AC120-277V 50/60Hz	40W	IV 80 or IV 90	3000K/ 4000K/ 5000K	≥ 0.9	85	Samsung	120	Suspended / Mounted	Alu+PC	D600*32*38	D23.6*1.3*1.5
LL0113S/M-50W		50W									D900*32*38	D35.4*1.3*1.5
LL0113S/M-80W		80W									D1200*32*38	D47.2*1.3*1.5
LL0113S/M-100W		100W									D1500*32*38	D59.1*1.3*1.5
LL0113S/M-120W		120W									D2000*32*38	D78.8*1.3*1.5
LL0113S/M-200W		200W									D3000*32*38	D118.1*1.3*1.5
LL0113S/M-400W		400W									D5000*32*38	D196.9*1.3*1.5

Ring Series





OSRAM

SAMSUNG



Light Distribution Curve



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) D*W*H	Size(Inch) D*W*H
LL0125S-32W	AC220-240V or AC120-277V 50/60Hz	32W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70lm/w	Samsung	300	Suspended	Alu+PC	D600*35*32	D23.6*1.4*1.3
LL0125S-40W		40W									D900*35*32	D35.4*1.4*1.3
LL0125S-70W		70W									D1200*35*32	D47.2*1.4*1.3
LL0125S-80W		80W									D1500*35*32	D59.1*1.4*1.3
LL0125M-32W	AC220-240V or AC120-277V 50/60Hz	32W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70lm/w	Samsung	300	Mounted	Alu+PC	D600*35*32	D23.6*1.4*1.3
LL0125M-40W		40W									D900*35*32	D35.4*1.4*1.3
LL0125M-70W		70W									D1200*35*32	D47.2*1.4*1.3
LL0125M-80W		80W									D1500*35*32	D59.1*1.4*1.3
LL0126S-32W	AC220-240V or AC120-277V 50/60Hz	32W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70lm/w	Samsung	300	Suspended	Alu+PC	D600*35*32	D23.6*1.4*1.3
LL0126S-40W		40W									D900*35*32	D35.4*1.4*1.3
LL0126S-70W		70W									D1200*35*32	D47.2*1.4*1.3
LL0126S-80W		80W									D1500*35*32	D59.1*1.4*1.3
LL0126M-32W	AC220-240V or AC120-277V 50/60Hz	32W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70lm/w	Samsung	300	Mounted	Alu+PC	D600*35*32	D23.6*1.4*1.3
LL0126M-40W		40W									D900*35*32	D35.4*1.4*1.3
LL0126M-70W		70W									D1200*35*32	D47.2*1.4*1.3
LL0126M-80W		80W									D1500*35*32	D59.1*1.4*1.3





Ring Series

Features:

- Nice and elegant design to add beauty to space;
- Can be grouped to different patterns to match the architecture style;
- Different finish or color is available;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Long lifetime and energy efficient.

Application:

Hotel, shop, home, museum, restaurant, etc.



OSRAM


SAMSUNG



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) D*W*H	Size(Inch) D*W*H
LL0212S-120W	AC220-240V or AC120-277V 50/60Hz	120W	80 or 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	300	Suspended	Alu+Silicon (5 Circles)	D600*56	D23.6*2.2
LL0212S-160W		160W									D800*56	D31.5*2.2
LL0212S-200W		200W									D1000*56	D39.4*2.2
LL0212S-250W		250W									D1200*56	D47.2*2.2
LL0212S-320W		320W									D1500*56	D59.1*2.2



Ring Lighting Series

NE SHINE

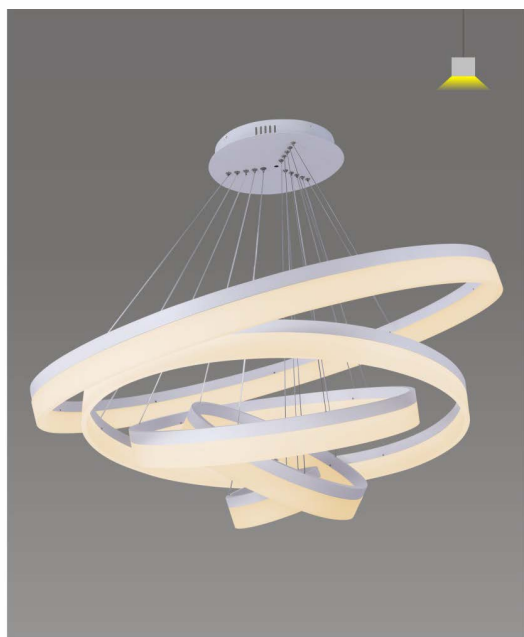

CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 160°
Installation: Suspended
Material: Alu+PMMA

Light Distribution Curve




OSRAM

SAMSUNG





Model	Power	Input voltage(V)	Size(mm) D*W*H	Size(Inch) D*W*H
LL0203S-15W	15W	AC220-240V or AC120-277V 50/60Hz	D400*13*70	D15.7*0.5*2.8
LL0203S-25W	25W		D600*13*70	D23.6*0.5*2.8
LL0203S-35W	35W		D800*13*70	D31.5*0.5*2.8
LL0203S-45W	45W		D1000*13*70	D39.4*0.5*2.8
LL0203S-50W	50W		D1200*13*70	D47.2*0.5*2.8
LL0203S-60W	60W		D1500*13*70	D59.1*0.5*2.8

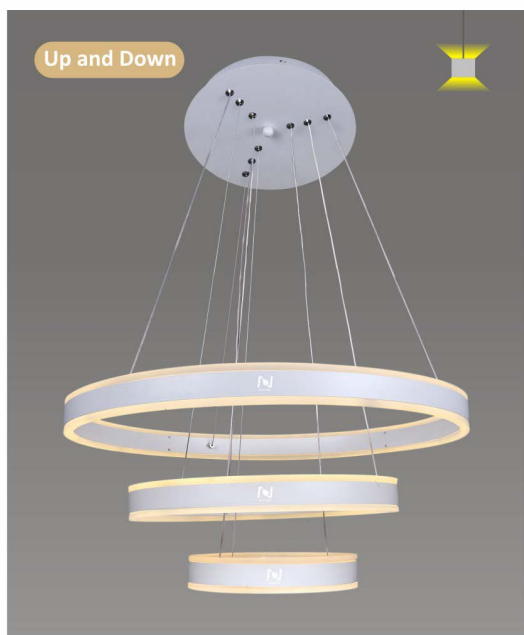

CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 280°
Installation: Suspended
Material: Alu+PMMA

Light Distribution Curve




OSRAM

SAMSUNG



Model	Power	Input voltage(V)	Size(mm) D*W*H	Size(Inch) D*W*H
LL0204UDS-30W	30W	AC220-240V or AC120-277V 50/60Hz	D400*13*72	D15.7*0.5*2.8
LL0204UDS-50W	50W		D600*13*72	D23.6*0.5*2.8
LL0204UDS-60W	60W		D800*13*72	D31.5*0.5*2.8
LL0204UDS-80W	80W		D1000*13*72	D39.4*0.5*2.8
LL0204UDS-90W	90W		D1200*13*72	D47.2*0.5*2.8
LL0204UDS-100W	100W		D1500*13*72	D59.1*0.5*2.8

Ring Series

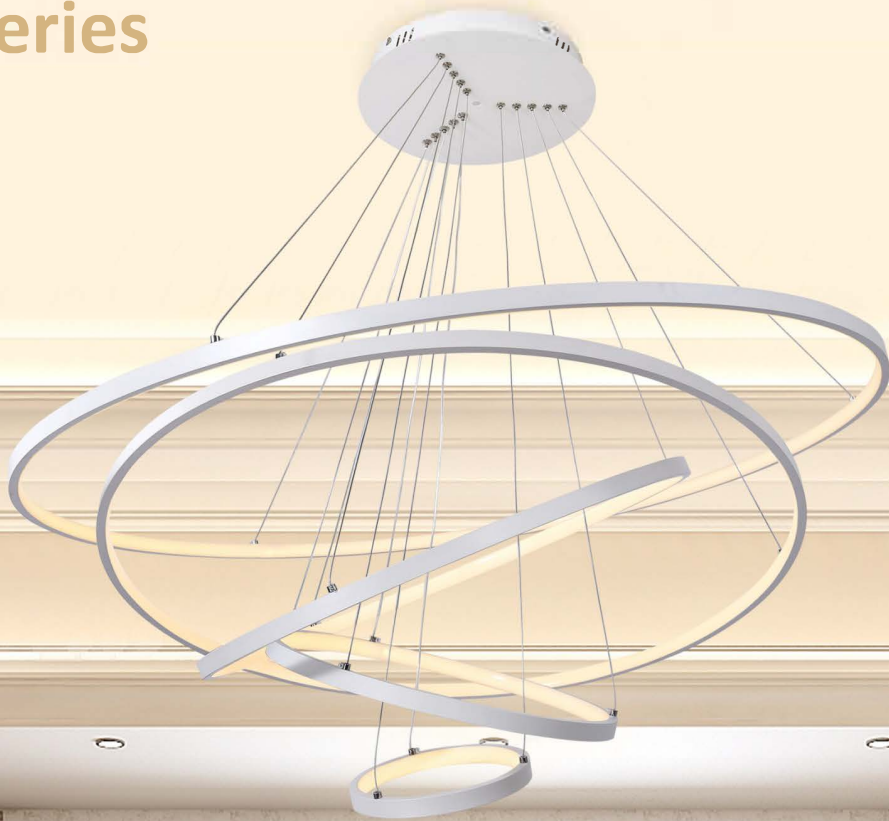

Ring Series

OSRAM

SAMSUNG



Architectural

Indoor

Protective
grounding

High
efficiency

No flicker

Dimmable

DALI

5 Year
Warranty


Color Tuning

RGB



SATIN WHITE

SATIN BLACK

SAA

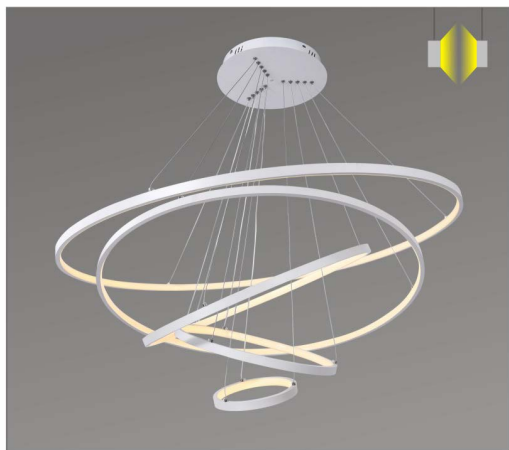



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 300°
Installation: Suspended
Material: Alu+PC




Model	Power	Input voltage(V)	Size(mm) D*W*H	Size(Inch) D*W*H
LL02075-20W	20W	AC220-240V or AC120-277V 50/60Hz	D400*10*20	D15.7*0.4*0.8
LL02075-30W	30W		D600*10*20	D23.6*0.4*0.8
LL02075-40W	40W		D800*10*20	D31.5*0.4*0.8
LL02075-50W	50W		D1000*10*20	D39.4*0.4*0.8
LL02075-60W	60W		D1200*10*20	D47.2*0.4*0.8
LL02075-80W	80W		D1500*10*20	D59.1*0.4*0.8





CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 300°
Installation: Suspended
Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) D*W*H	Size(Inch) D*W*H
LL02085-20W	20W	AC220-240V or AC120-277V 50/60Hz	D400*10*20	D15.7*0.4*0.8
LL02085-30W	30W		D600*10*20	D23.6*0.4*0.8
LL02085-40W	40W		D800*10*20	D31.5*0.4*0.8
LL02085-50W	50W		D1000*10*20	D39.4*0.4*0.8
LL02085-60W	60W		D1200*10*20	D47.2*0.4*0.8
LL02085-80W	80W		D1500*10*20	D59.1*0.4*0.8

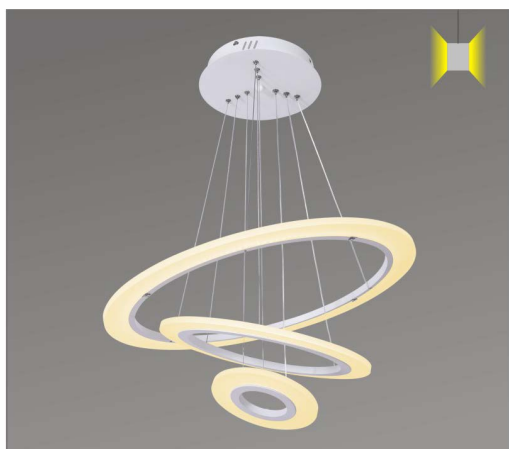

CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 240°
Installation: Suspended
Material: Alu+PC




Model	Power	Input voltage(V)	Size(mm) D*W*H	Size(Inch) D*W*H
LL02115-10W	10W	AC220-240V or AC120-277V 50/60Hz	D200*58*10	D7.9*2.3*0.4
LL02115-20W	20W		D400*58*10	D15.7*2.3*0.4
LL02115-30W	30W		D600*58*10	D23.6*2.3*0.4
LL02115-40W	40W		D800*58*10	D31.5*2.3*0.4





Doughnut

OSRAM


SAMSUNG

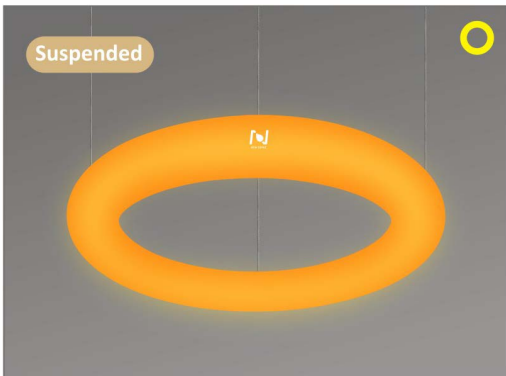



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 360°
 Installation: Suspended
 Material: ABS+PC



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0175S-25W	25W	AC220-240V OR AC120-277V 50/60Hz	D470*80	D18.5*3.1
LL0175S-36W	36W		D600*80	D23.6*3.1
LL0175S-45W	45W		D800*80	D31.5*3.1

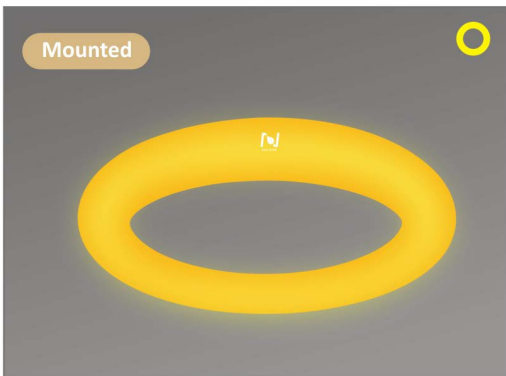

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 360°
 Installation: Surface Mounted
 Material: ABS+PC



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0175M-25W	25W	AC220-240V OR AC120-277V 50/60Hz	D470*120	D18.5*4.7
LL0175M-36W	36W		D600*120	D23.6*4.7
LL0175M-45W	45W		D800*120	D31.5*4.7



Frame Series

Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Can be grouped to different patterns to match the architecture style;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Supermarket, hotel, home, office, restaurant, public building, etc.



Frame Series

OSRAM


SAMSUNG



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/3500/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended
 Material: Alu+PMMA





Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0209S-25W	25W	AC220-240V OR AC120-277V 50/60Hz	200*400*70	7.9*15.7*2.8
LL0209S-40W	40W		300*600*70	11.8*23.6*2.8
LL0209S-50W	50W		400*800*70	15.7*31.5*2.8
LL0209S-80W	80W		600*1000*70	23.6*39.4*2.8

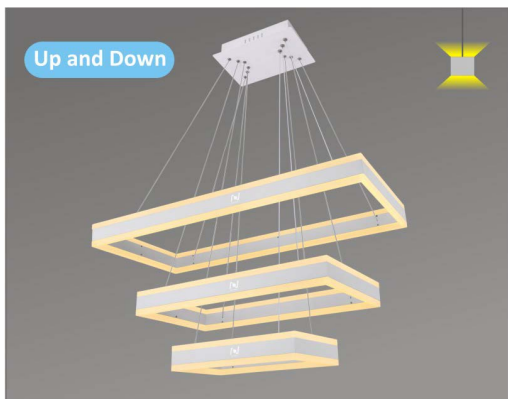

Up and Down

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/3500/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 280°
 Installation: Suspended
 Material: Alu+PMMA




Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0210UDS-50W	50W	AC220-240V OR AC120-277V 50/60Hz	200*400*72	7.9*15.7*2.8
LL0210UDS-80W	80W		300*600*72	11.8*23.6*2.8
LL0210UDS-100W	100W		400*800*72	15.7*31.5*2.8
LL0210UDS-160W	160W		600*1000*72	23.6*39.4*2.8



Frame Series




CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 105
LED type: Samsung
Beam angle: 120°
Input voltage(V): AC220-240V OR AC120-277V 50/60Hz
Installation: Suspended / Surface Mounted
Material: Alu+PC

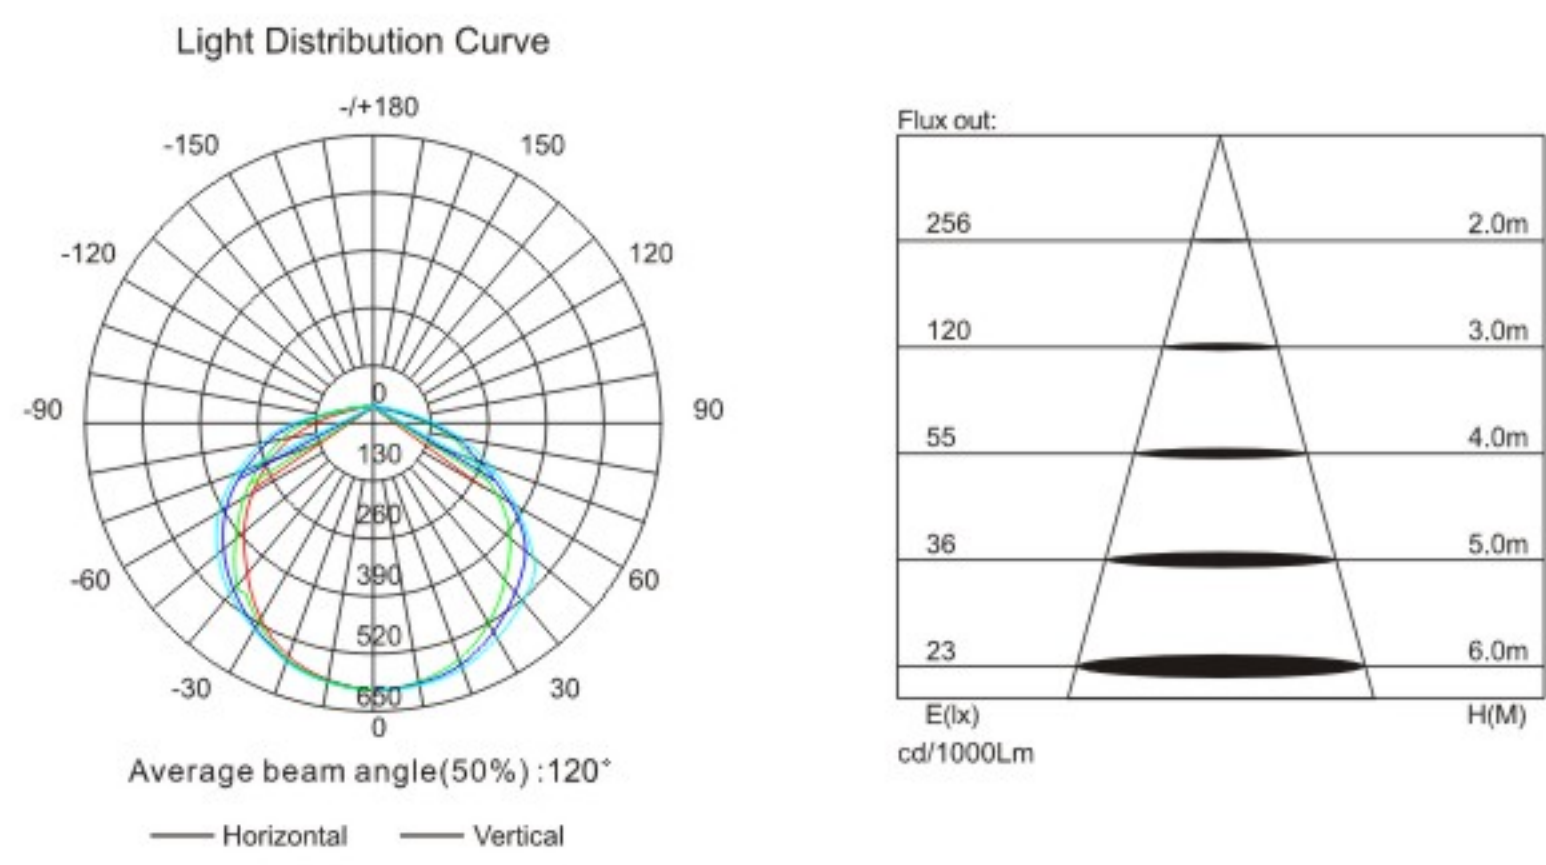

Model	Power	Suspended		Surface Mounted	
		Size(mm) L*W*H	Size(Inch) L*W*H	Size(mm) L*W*H	Size(Inch) L*W*H
LL0188S/M-25W	25W	416*360*85	16.4*14.2*3.4	416*360*75(OD480)	16.4*14.2*3.0
LL0188S/M-40W	40W	520*450*85	20.5*17.7*3.4	520*450*75(OD600)	20.5*17.7*3.0
LL0188S/M-90W	90W	780*675*85	30.7*26.6*3.4	780*675*75(OD900)	30.7*26.6*3.0
LL0188S/M-180W	180W	1039*900*85	40.9*35.4*3.4	1039*900*75(OD1200)	40.9*35.4*3.0



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 105
LED type: Samsung
Beam angle: 120°
Input voltage(V): AC220-240V or AC120-277V 50/60Hz
Installation: Suspended / Surface Mounted
Material: Alu+PC

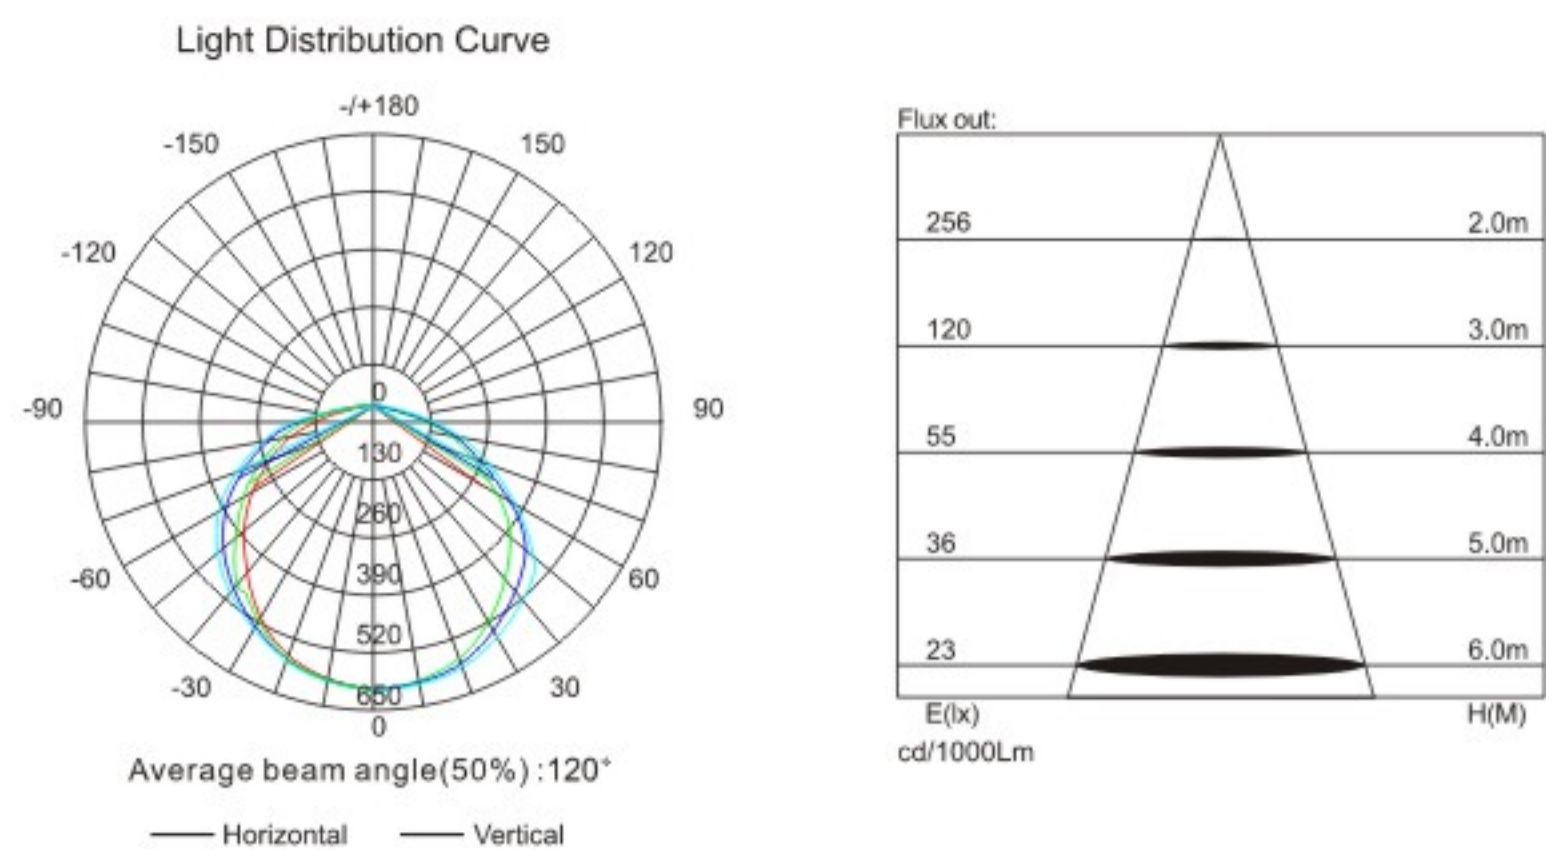

Model	Power	Suspended		Surface Mounted	
		Size(mm) L*W*H	Size(Inch) L*W*H	Size(mm) L*W*H	Size(Inch) L*W*H
LL0116S/M-15W	15W	300*300*75	11.8*11.8*3.0	300*300*85	11.8*11.8*3.4
LL0116S/M-40W	40W	600*600*75	23.6*23.6*3.0	600*600*85	23.6*23.6*3.4
LL0116S/M-80W	80W	600*1200*75	23.6*47.2*3.0	600*1200*85	23.6*47.2*3.4
LL0116S/M-160W	160W	1200*1200*75	47.2*47.2*3.0	1200*1200*85	47.2*47.2*3.4
LL0116S/M-320W	320W	1200*2400*75	47.2*94.5*3.0	1200*2400*85	47.2*94.5*3.4



OSRAM

SAMSUNG



Architectural



Indoor



Protective grounding



High efficiency



No flicker



Damp location



Dimmable



DALI



5 Year



Color tuning



RGB




SATIN WHITE





SATIN BLACK



RGB

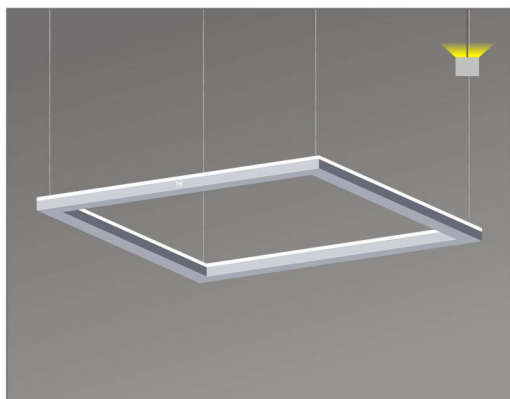



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 105
LED type: Samsung
Beam angle: 160°
Installation: Suspended
Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL01955-40W-U	40W	AC220-240V or AC120-277V 50/60Hz	600*600*25	23.6*23.6*0.98
LL01955-60W-U	60W		900*900*25	35.4*35.4*0.98
LL01955-80W-U	80W		1200*1200*25	47.2*47.2*0.98




CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 105
LED type: Samsung
Beam angle: 160°
Installation: Suspended
Material: Alu+PC




Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL01955-40W-D	40W	AC220-240V or AC120-277V 50/60Hz	600*600*25	23.6*23.6*0.98
LL01955-60W-D	60W		900*900*25	35.4*35.4*0.98
LL01955-80W-D	80W		1200*1200*25	47.2*47.2*0.98




Frame Series

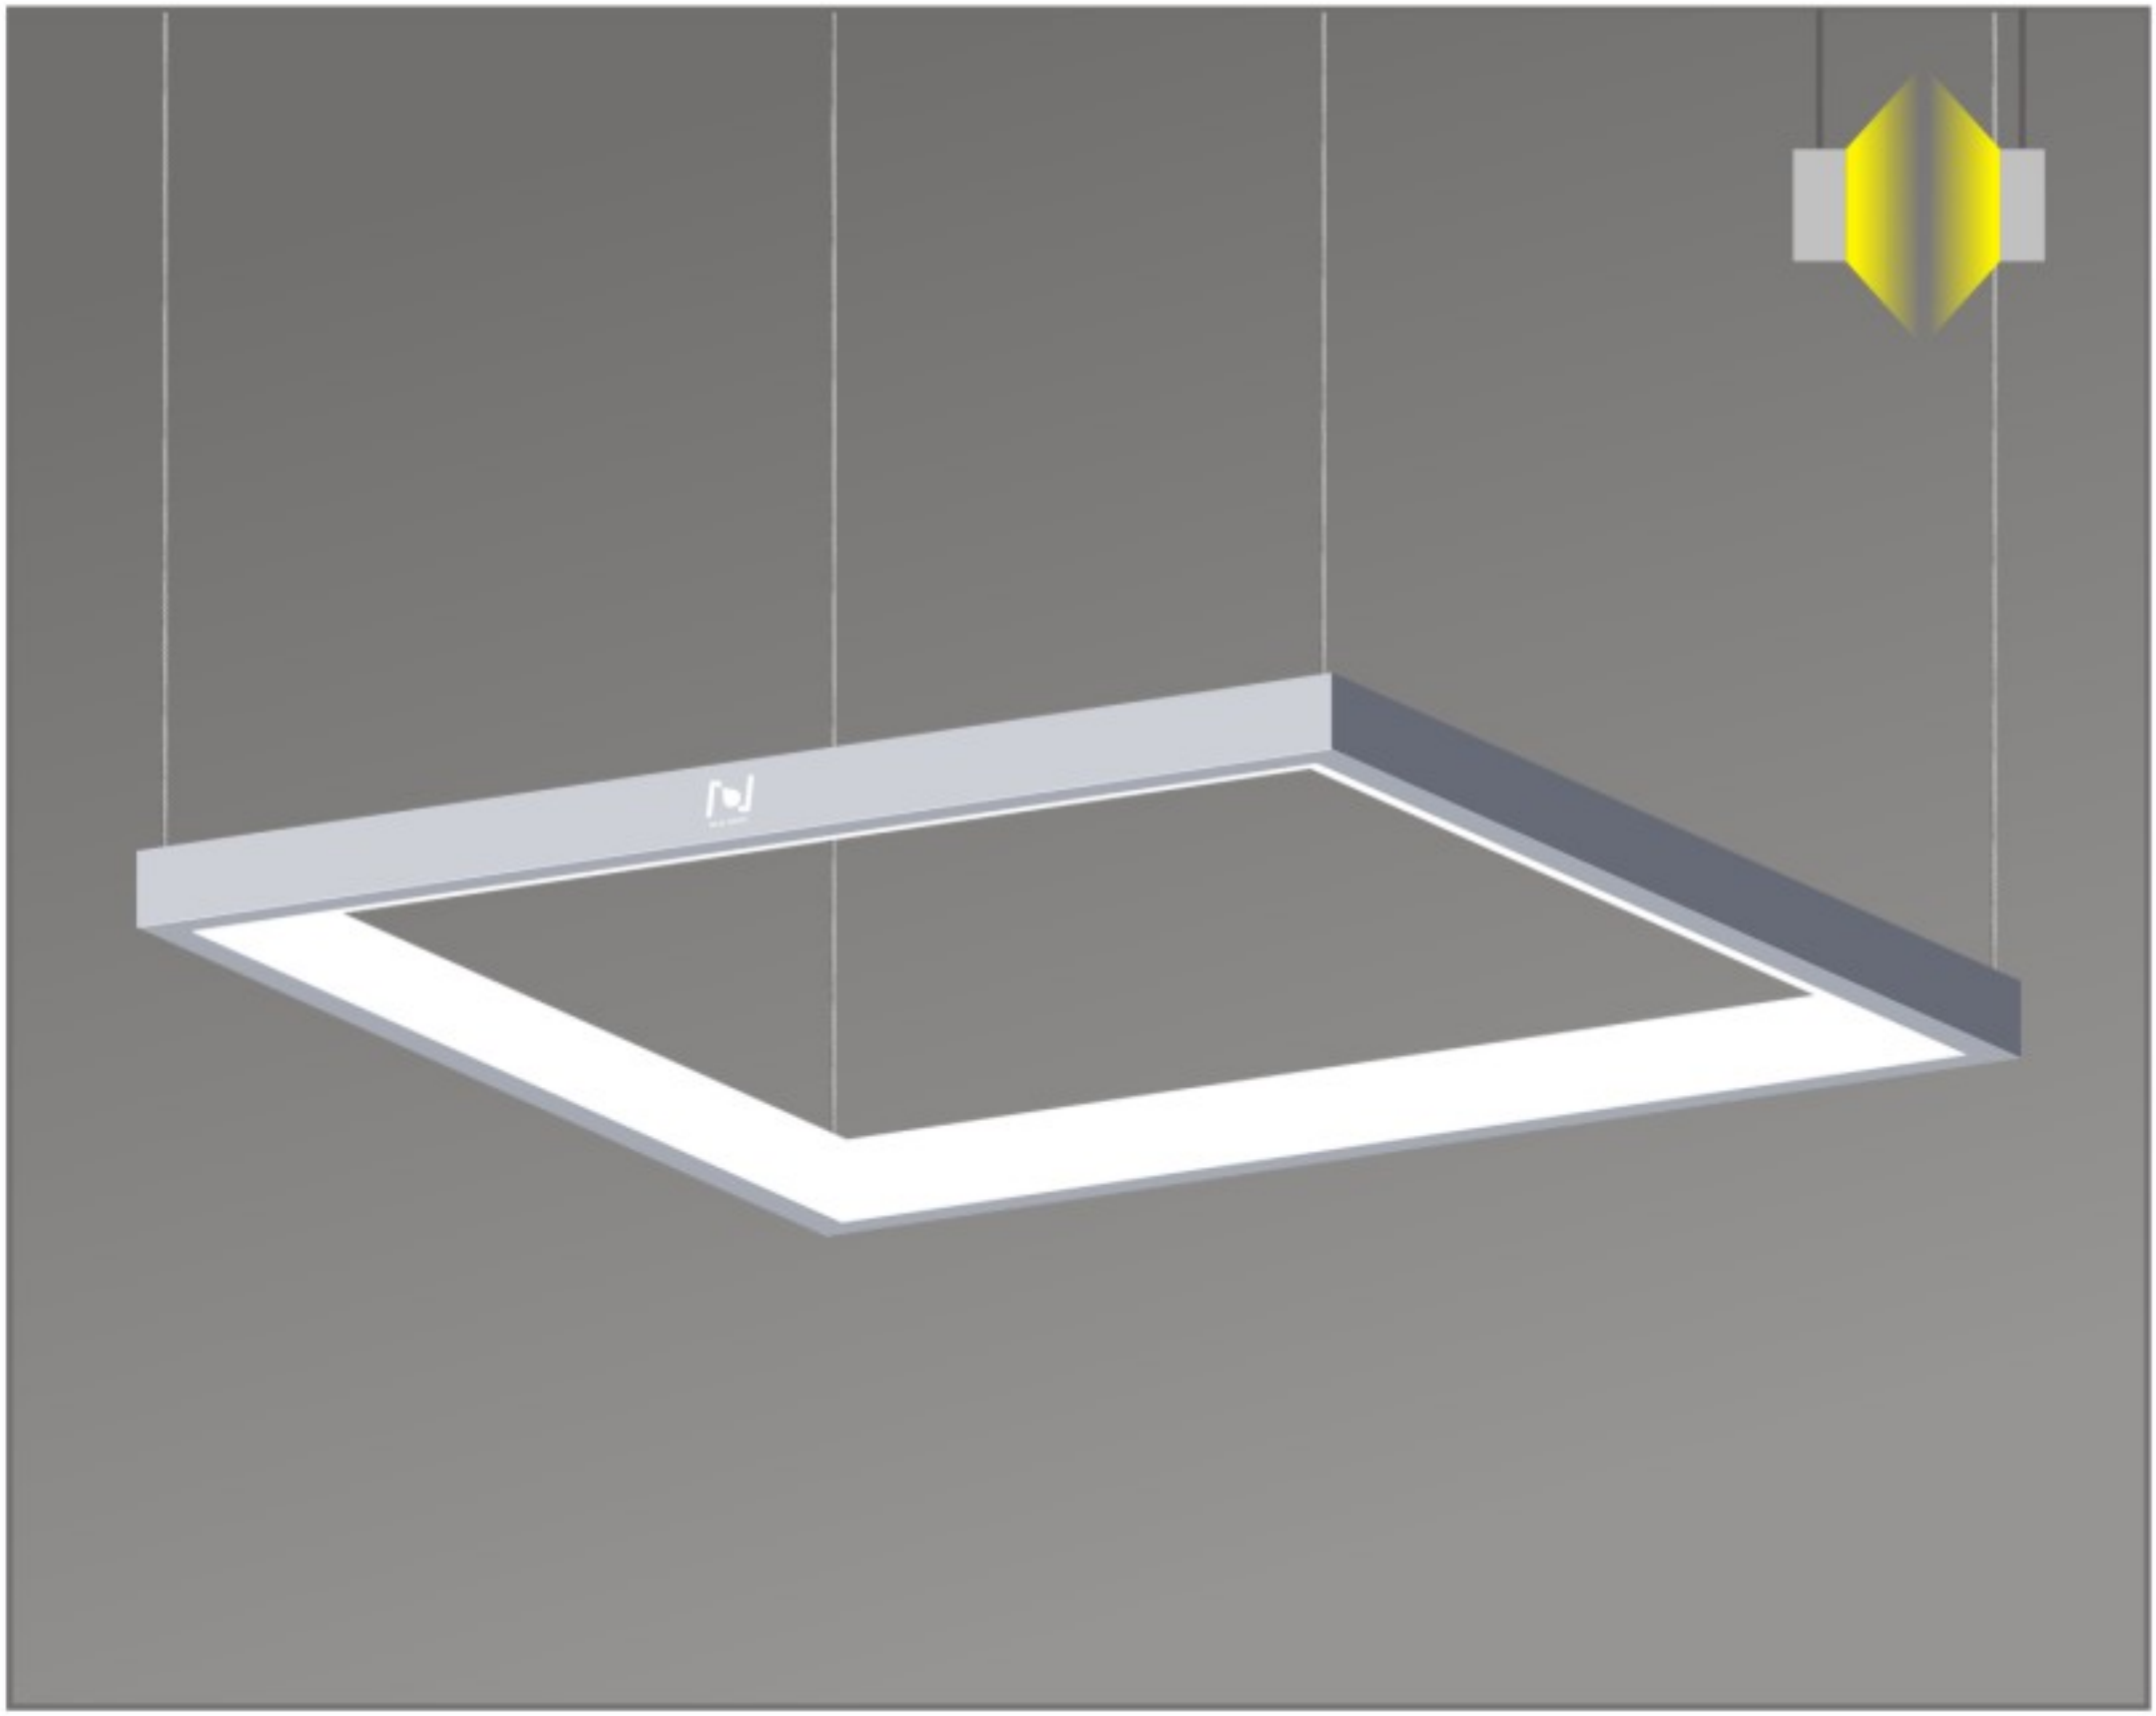


CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 105
LED type: Samsung
Beam angle: 160°
Installation: Suspended
Material: Alu+PC

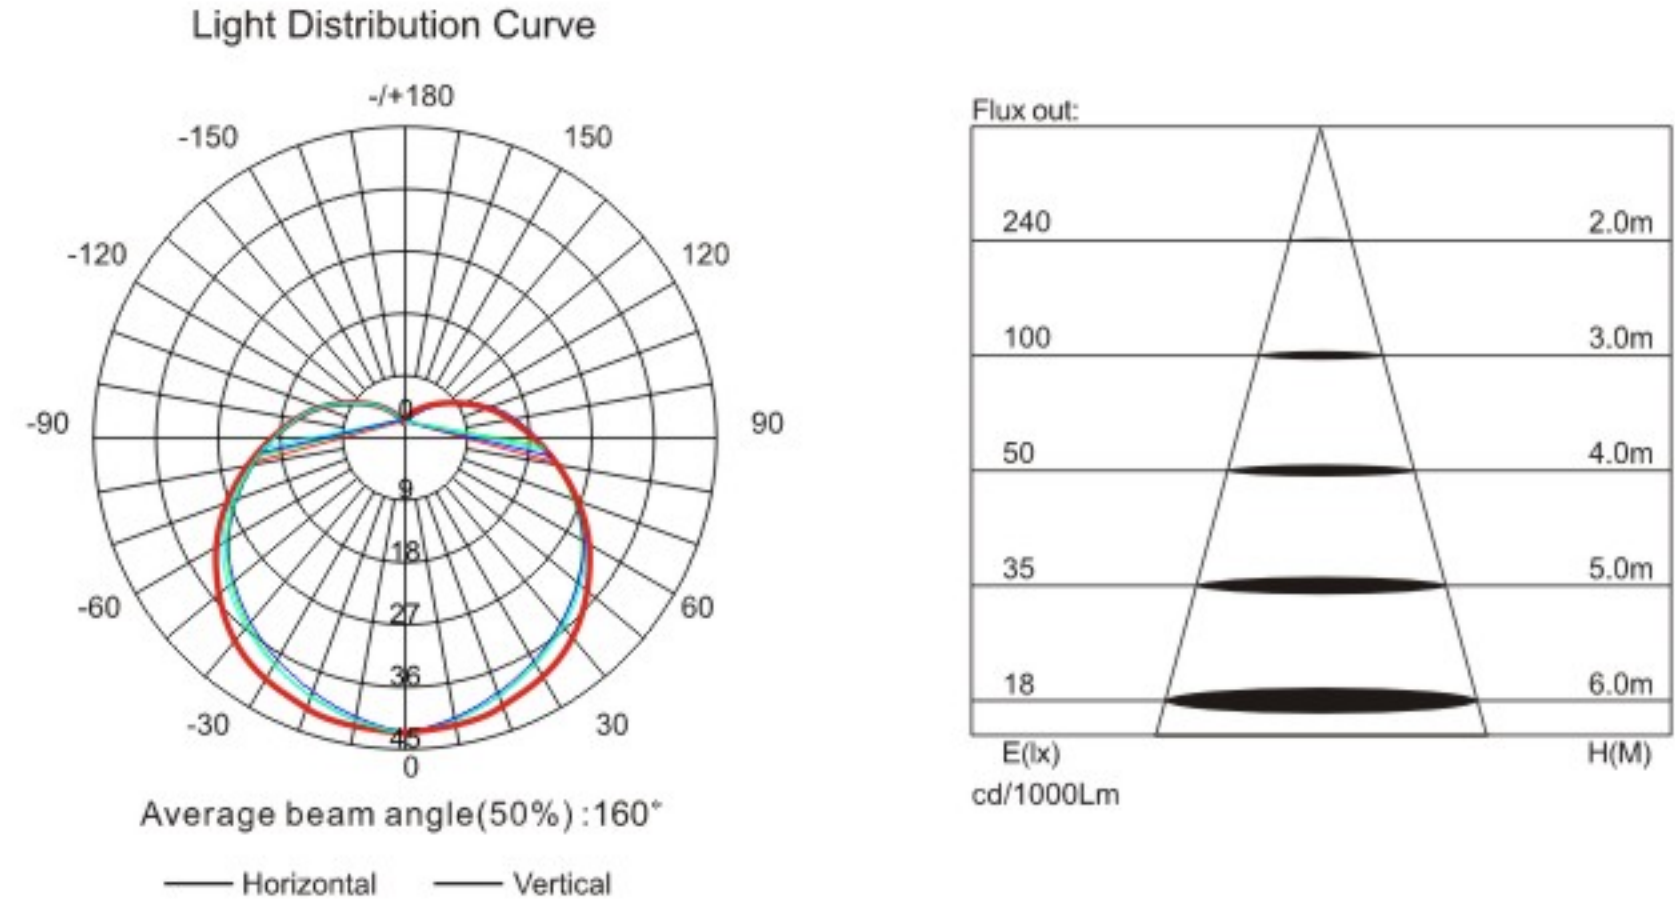

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL01955-40W-H	40W	AC220-240V or AC120-277V 50/60Hz	600*600*25	23.6*23.6*0.98
LL01955-60W-H	60W		900*900*25	35.4*35.4*0.98
LL01955-80W-H	80W		1200*1200*25	47.2*47.2*0.98

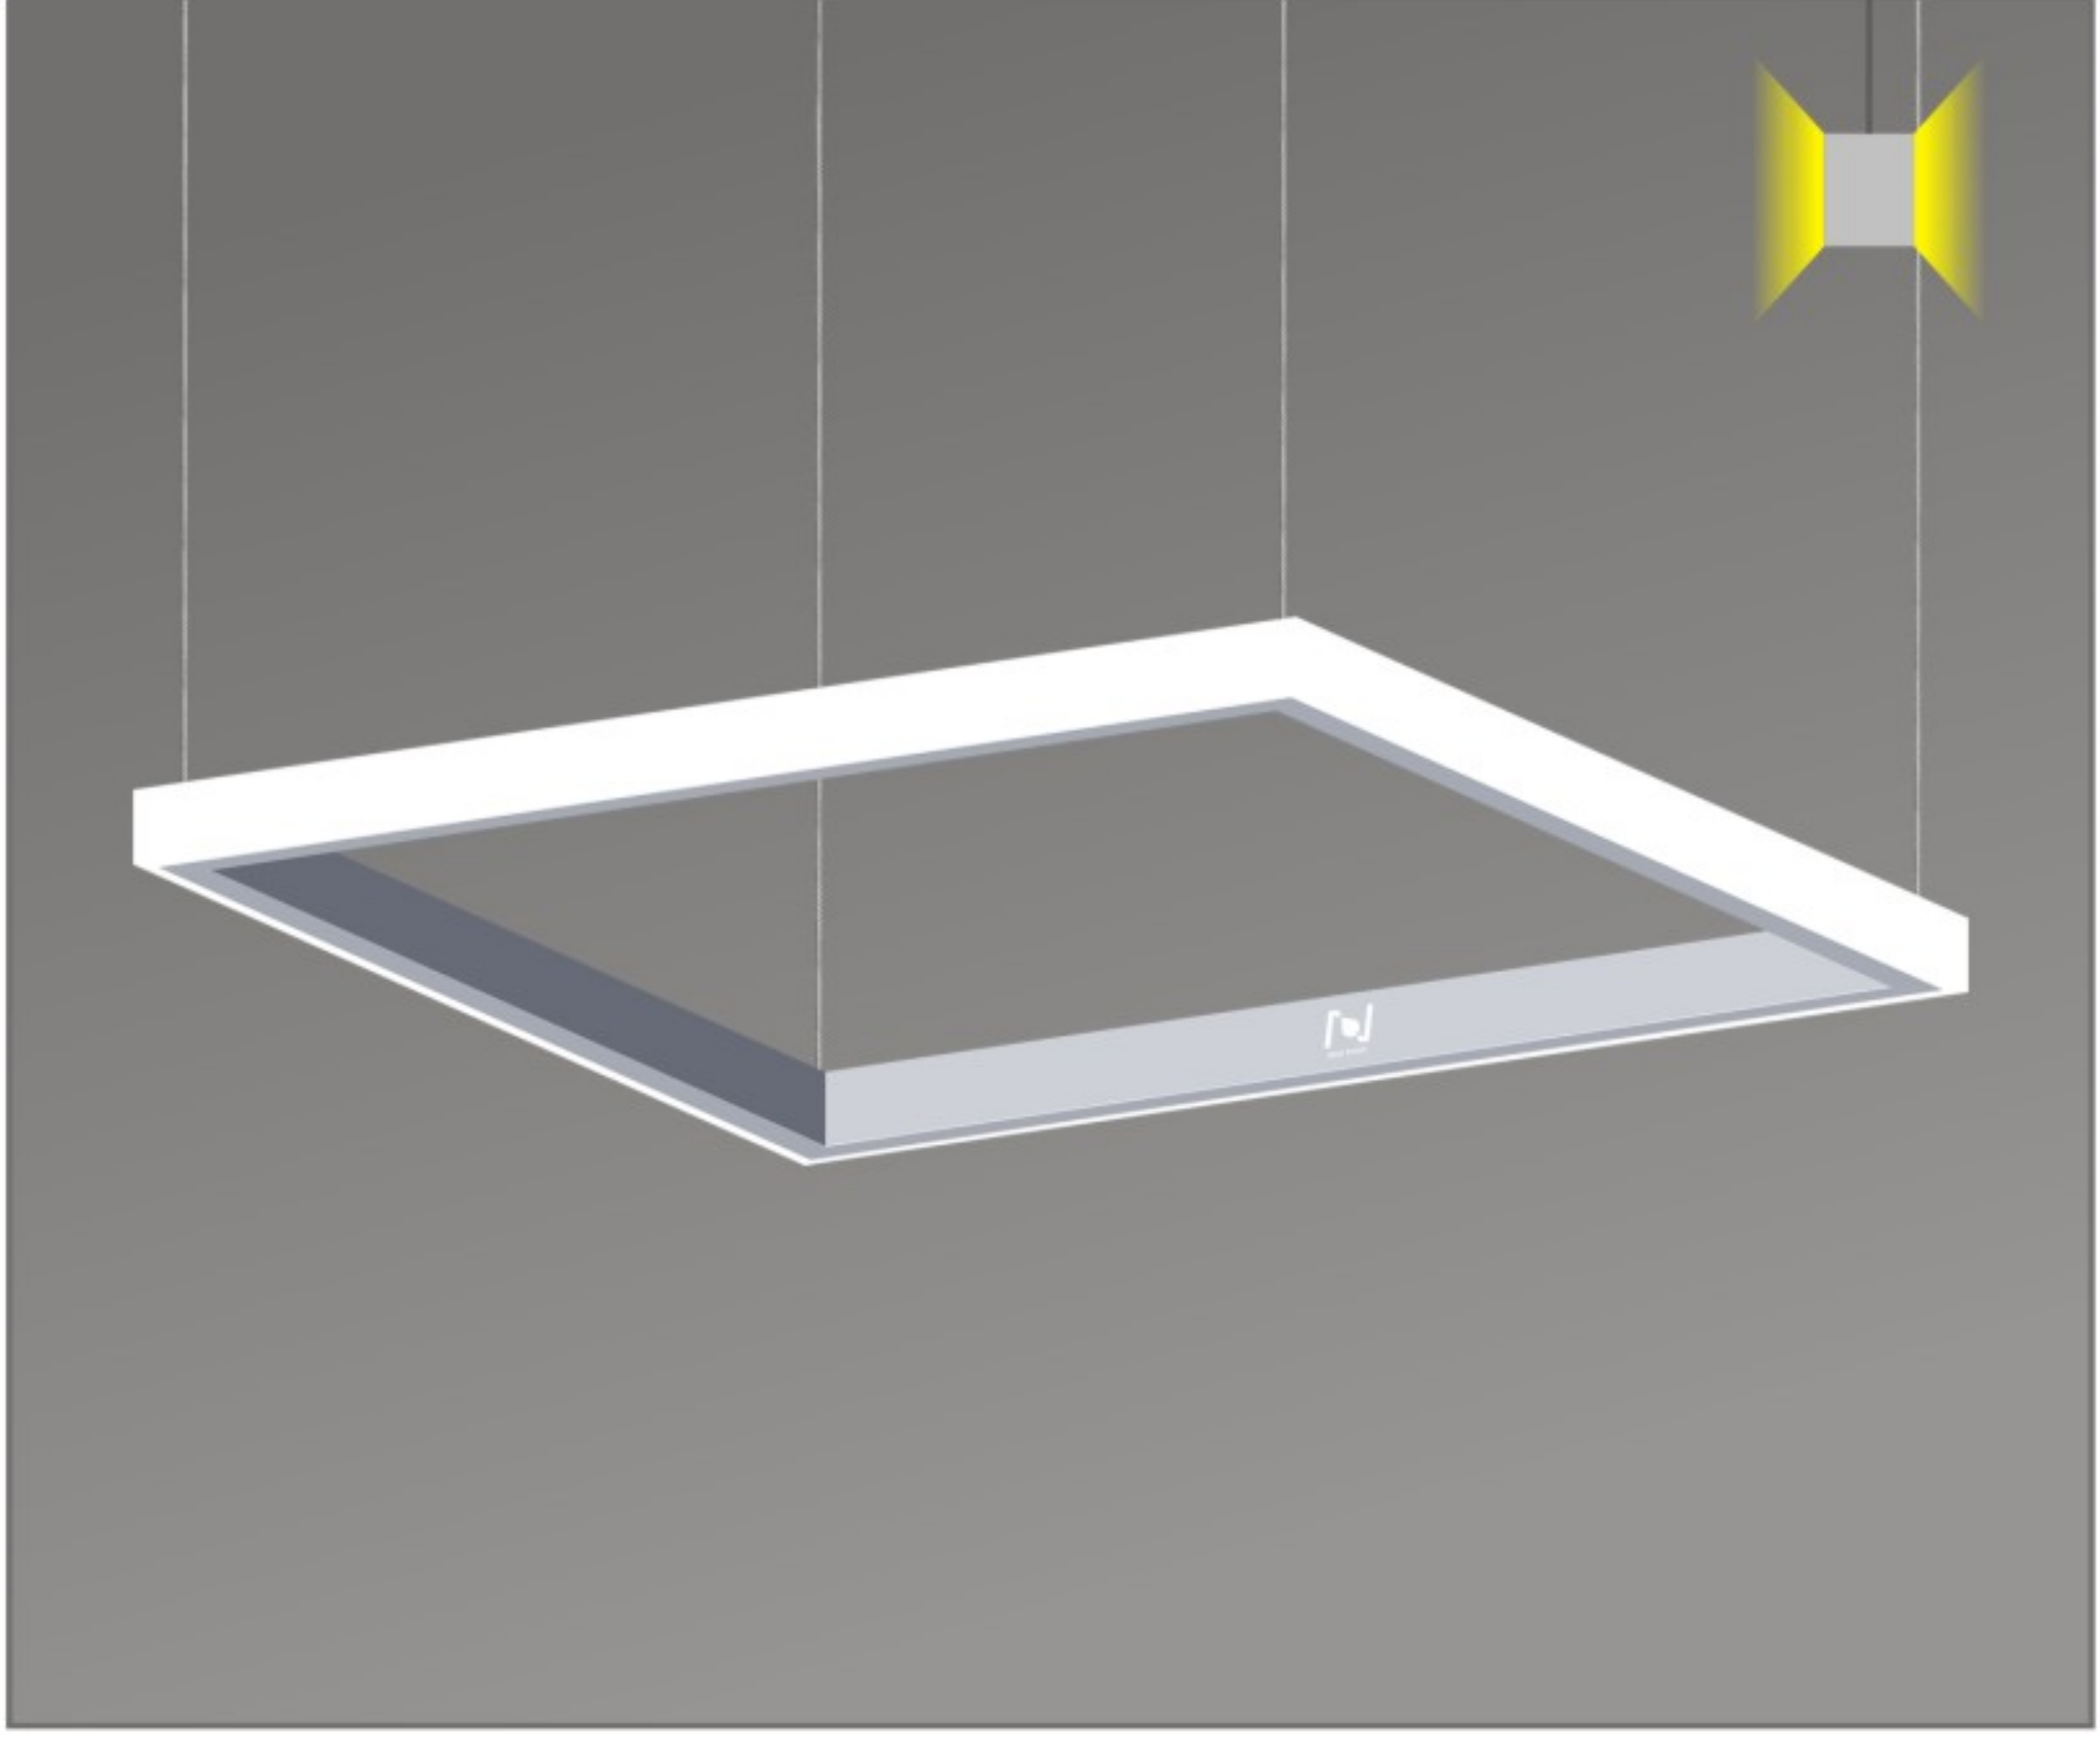

CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 105
LED type: Samsung
Beam angle: 160°
Installation: Suspended
Material: Alu+PC

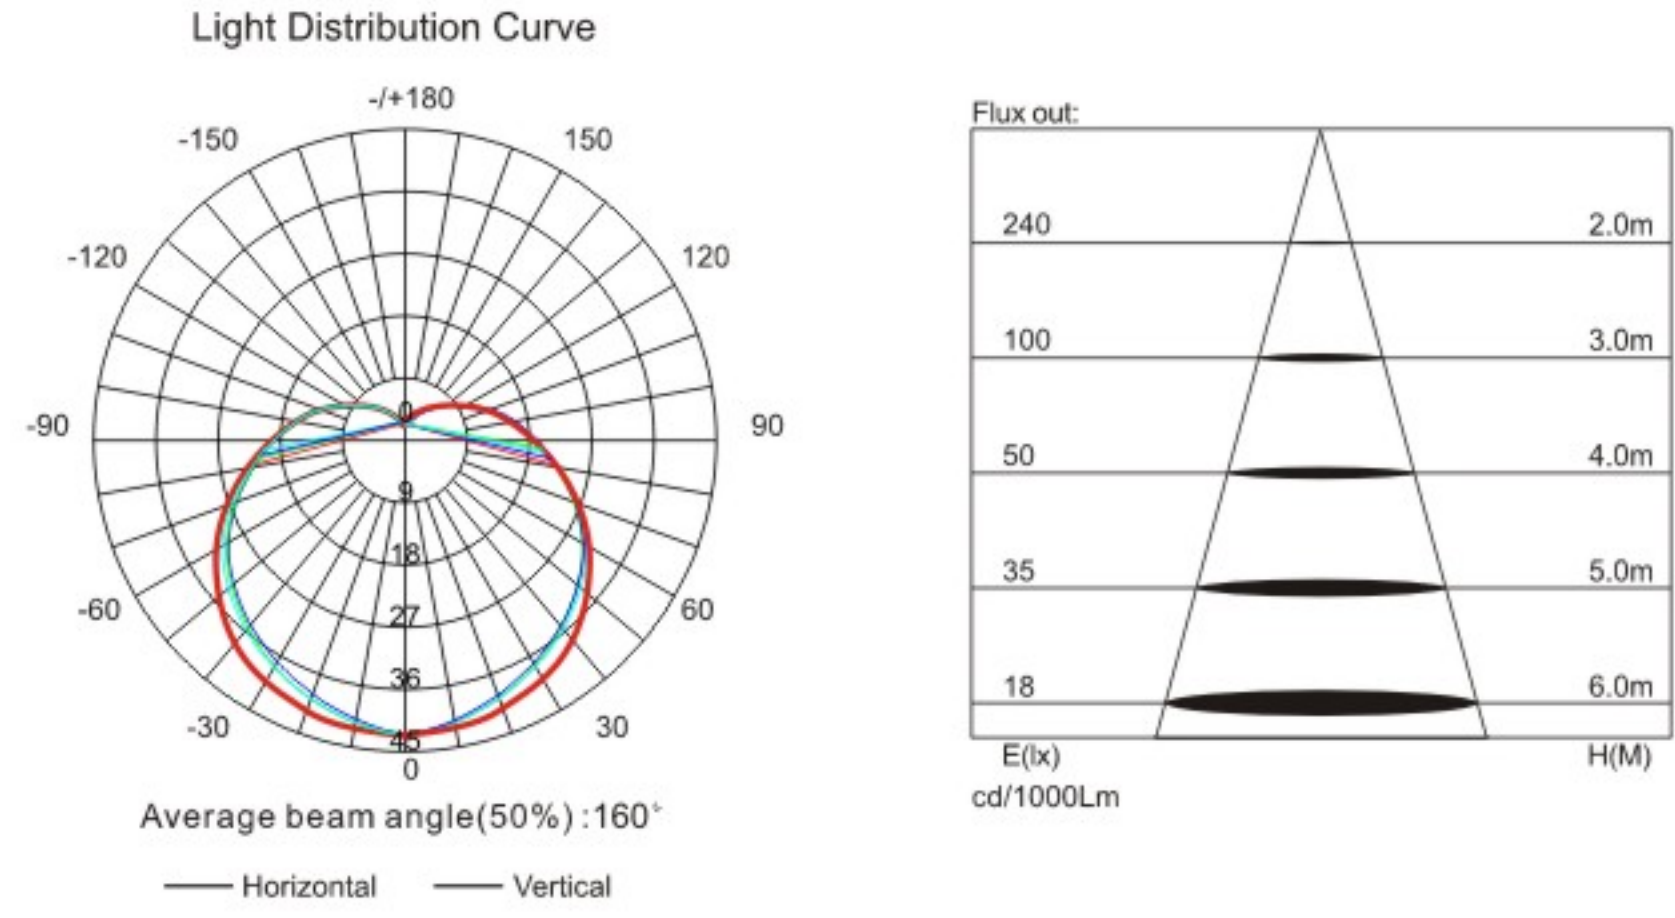


Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL01955-40W-O	40W	AC220-240V or AC120-277V 50/60Hz	600*600*25	23.6*23.6*0.98
LL01955-60W-O	60W		900*900*25	35.4*35.4*0.98
LL01955-80W-O	80W		1200*1200*25	47.2*47.2*0.98





OSRAM

SAMSUNG

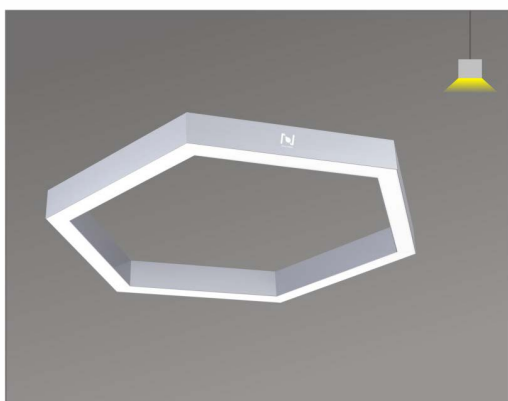



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 105
 LED type: Samsung
 Beam angle: 120°
 Installation: Surface Mounted
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0187M-25W	25W	AC220-240V or AC120-277V 50/60Hz	480*416*85(ID480)	18.9*16.4*3.4
LL0187M-40W	40W		600*520*85(ID600)	23.6*20.5*3.4
LL0187M-90W	90W		900*780*85(ID900)	35.4*30.7*3.4
LL0187M-180W	180W		1200*1040*85(ID1200)	47.2*40.9*3.4



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 105
 LED type: Samsung
 Beam angle: 120°
 Installation: Suspended
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0187S-25W	25W	AC220-240V or AC120-277V 50/60Hz	480*416*75(ID480)	18.9*16.4*3.0
LL0187S-40W	40W		600*520*75(ID600)	23.6*20.5*3.0
LL0187S-90W	90W		900*780*75(ID900)	35.4*30.7*3.0
LL0187S-180W	180W		1200*1040*75(ID1200)	47.2*40.9*3.0




Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Can be grouped to different patterns to match the architecture style;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.


Application:

Supermarket, hotel, home, office, restaurant, public building, etc.

Frame Series

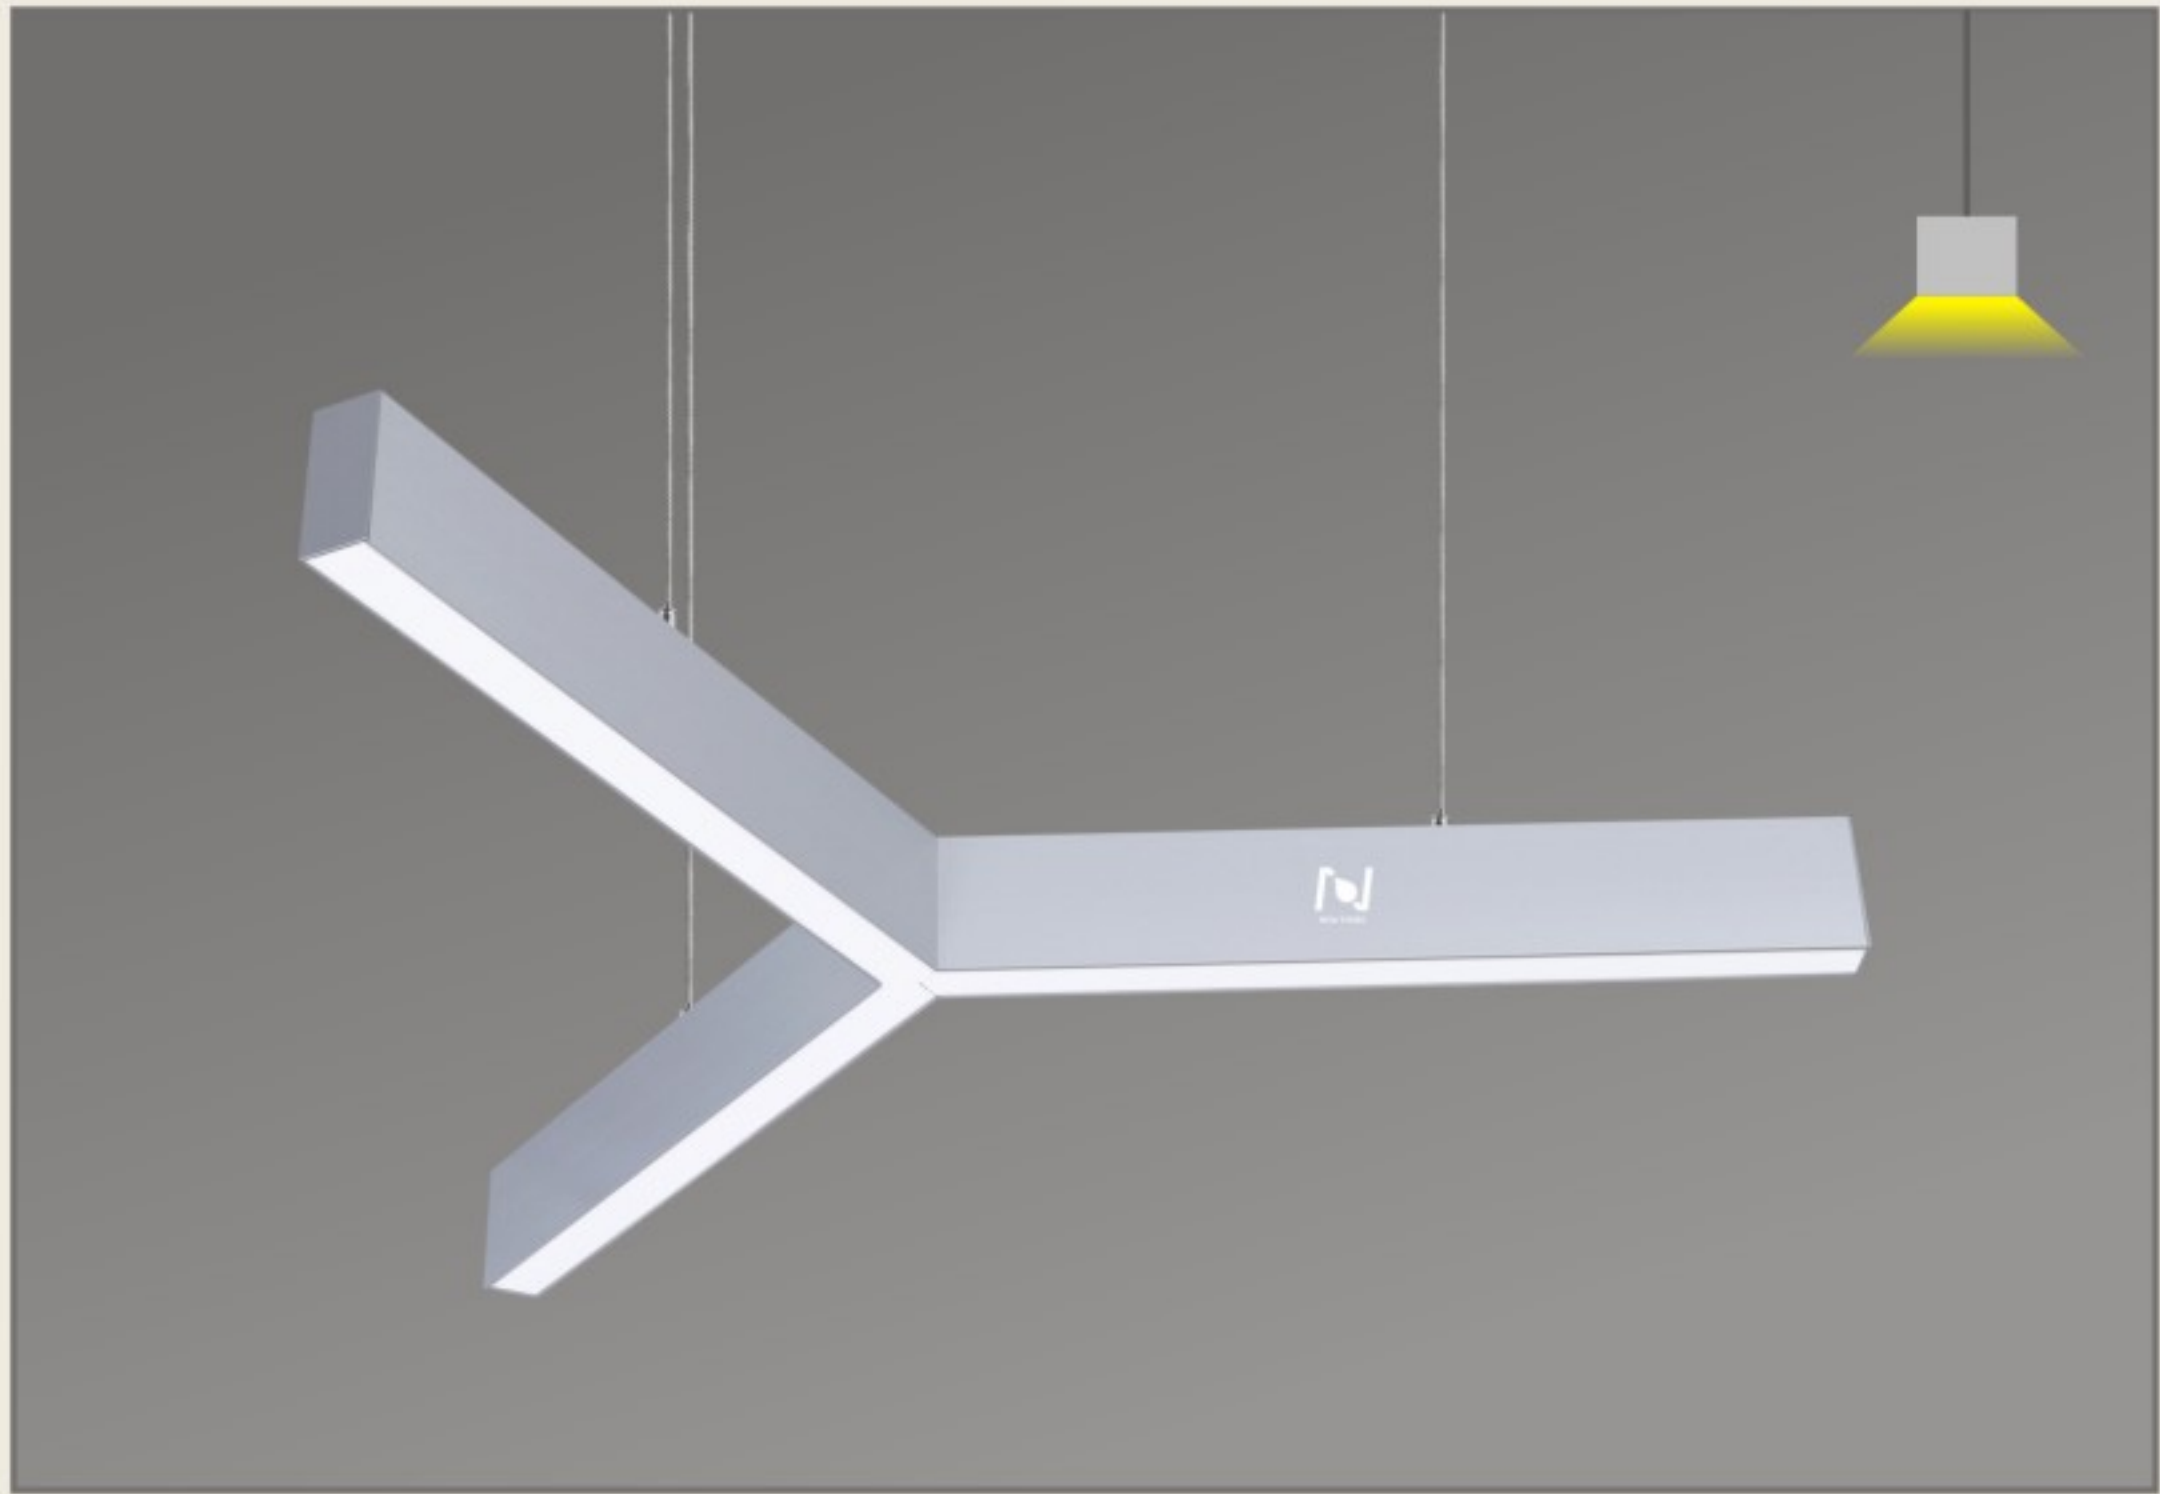


CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 105
 LED type: Samsung
 Beam angle: 120°
 Installation: Suspended
 Material: Alu+PC

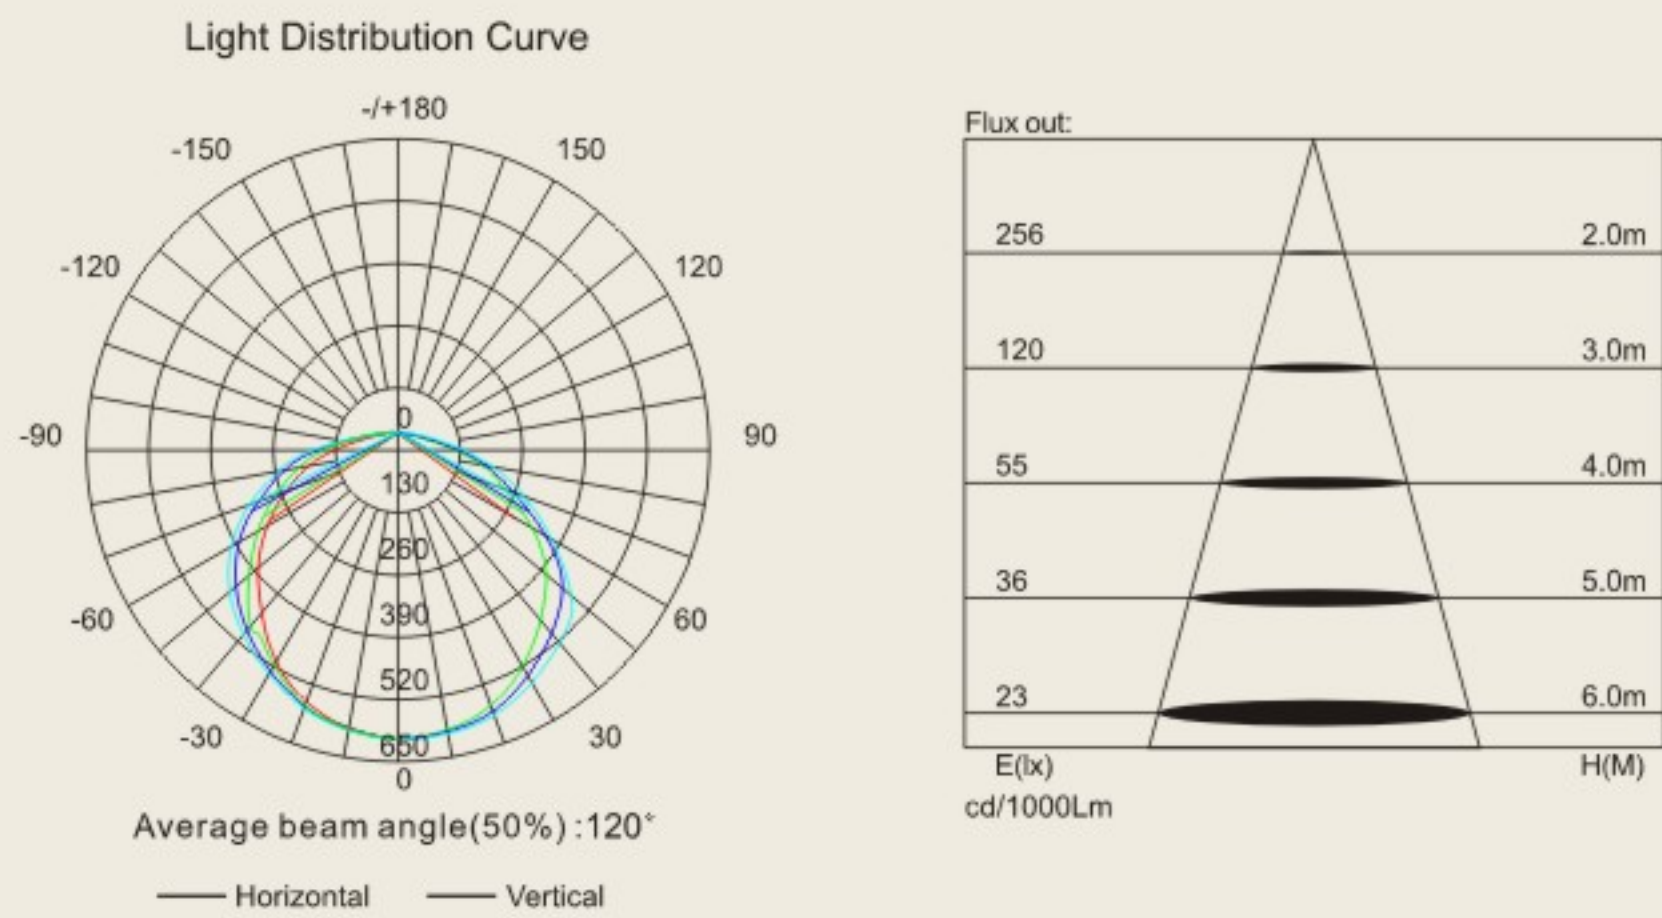

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0190S/M-40W	40W	AC220-240V or AC120-277V 50/60Hz	563*501*75(L300)	22.2*19.7*3.0/3.4
LL0190S/M-80W	80W		1081*963*75(L600)	42.6*37.9*3.0/3.4
LL0190S/M-120W	120W		1600*1426*75(L900)	63.0*56.1*3.0/3.4

Moon Series

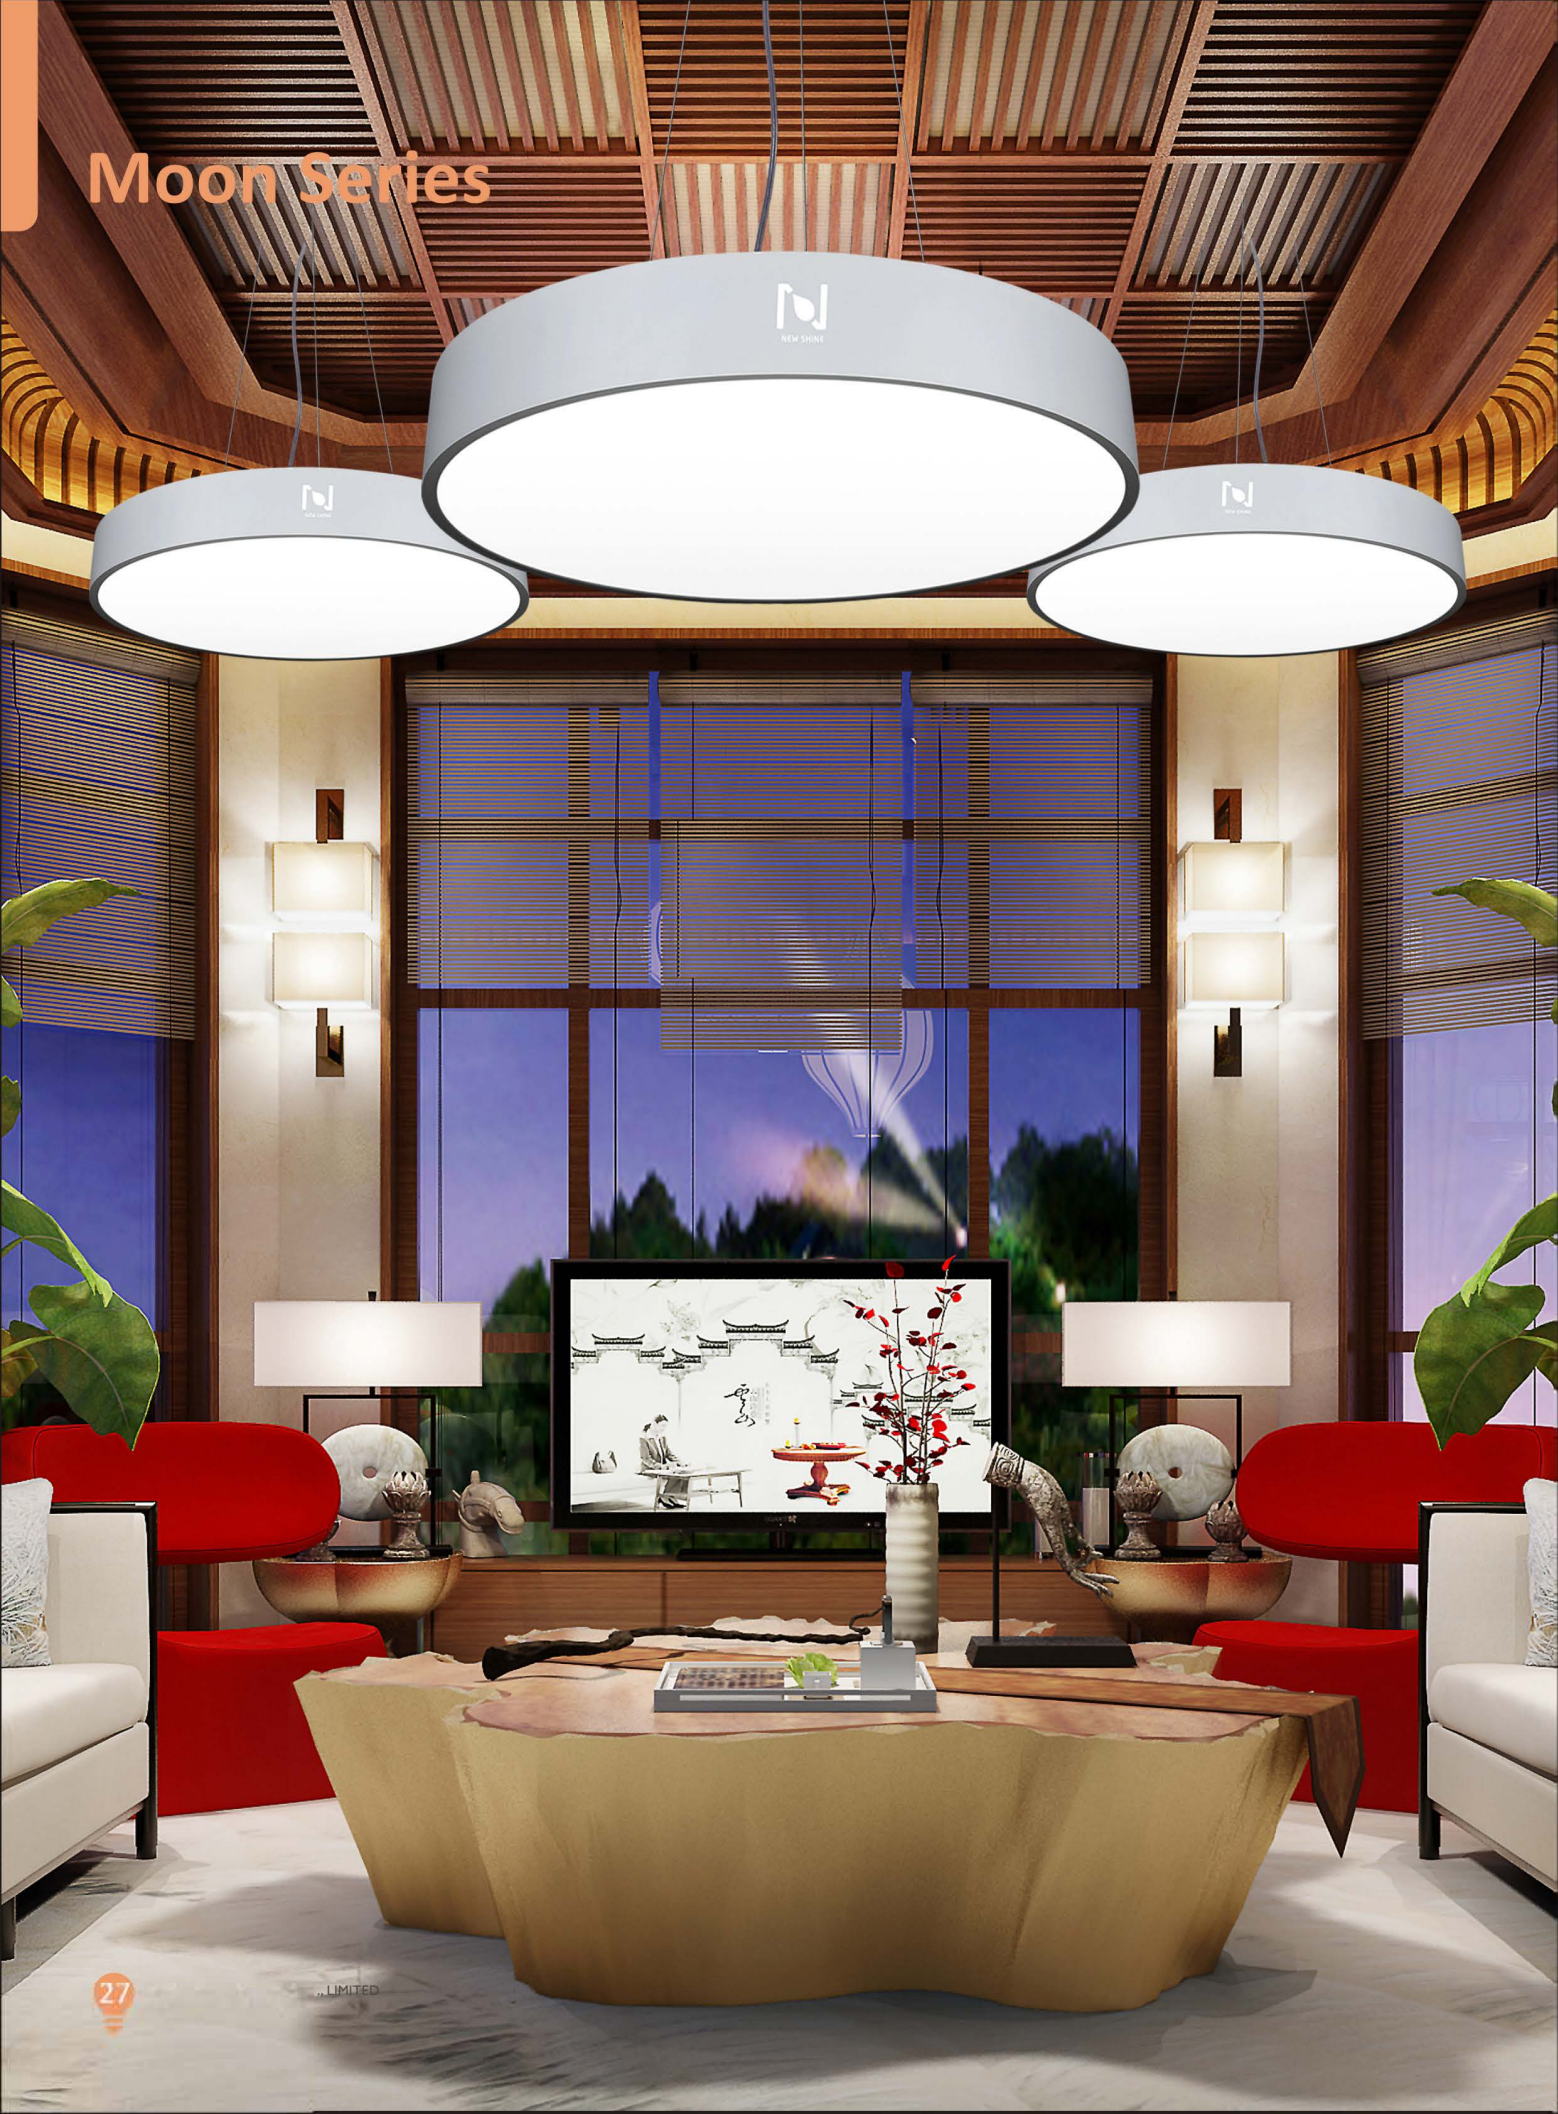



LL0112S




LL0112M

Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, restaurant, public building, etc.

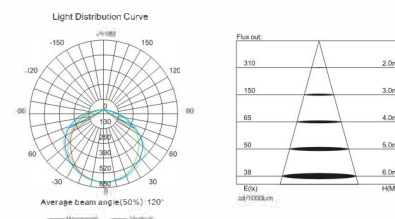

OSRAM

SAMSUNG





Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) D*H	Size(Inch) D*H
LL0112S	LL0112S-15W	AC220-240V or AC120-277V 50/60Hz	15W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	85	Samsung	120	Suspended	Alu+PC	D300*45	D11.8*1.8
	LL0112S-20W		20W									D400*45	D15.7*1.8
	LL0112S-25W		25W									D480*80	D18.9*3.1
	LL0112S-40W		40W									D600*80	D23.6*3.1
	LL0112S-90W		90W									D900*80	D35.4*3.1
	LL0112S-180W		180W									D1200*80	D47.2*3.1
LL0112M	LL0112M-15W	AC220-240V or AC120-277V 50/60Hz	15W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	85	Samsung	120	Surface Mounted	Alu+PC	D300*65	D11.8*2.6
	LL0112M-20W		20W									D400*65	D15.7*2.6
	LL0112M-25W		25W									D480*95	D18.9*3.7
	LL0112M-40W		40W									D600*95	D23.6*3.7
	LL0112M-90W		90W									D900*95	D35.4*3.7
	LL0112M-150W		150W									D1200*95	D47.2*3.7

Moon Series

OSRAM SAMSUNG





CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 85
LED type: Samsung
Beam angle: $120^{\circ} \times 2$
Installation: Suspended
Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0112UDS-50W	50W	AC220-240V or AC120-277V 50/60Hz	D480*80	D18.9*3.1
LL0112UDS-80W	80W		D600*80	D23.6*3.1
LL0112UDS-120W	120W	AC120-277V 50/60Hz	D900*80	D35.4*3.1
LL0112UDS-220W	220W		D1200*80	D47.2*3.1





CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 85
LED type: Samsung
Beam angle: $120^{\circ} \times 2$
Installation: Surface Mounted
Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0112UDM-50W	50W	AC220-240V or AC120-277V 50/60Hz	D480*95	D18.9*3.7
LL0112UDM-80W	80W		D600*95	D23.6*3.7
LL0112UDM-120W	120W	AC120-277V 50/60Hz	D900*95	D35.4*3.7
LL0112UDM-150W	150W		D1200*95	D47.2*3.7



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 85
LED type: Samsung
Beam angle: 120°
Installation: Recessed
Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0112R-25W	25W	AC220-240V or AC120-277V 50/60Hz	D510*95	D20.1*3.7
LL0112R-40W	40W		D630*95	D24.8*3.7
LL0112R-90W	90W	AC120-277V 50/60Hz	D930*95	D36.6*3.7
LL0112R-150W	150W		D1230*95	D48.4*3.7



Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, restaurant, public building, etc.

Rainbow Series

Rainbow Series





OSRAM


SAMSUNG





CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: 120°
 Installation: Suspended
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0118S-40W	40W	AC220-240V or AC120-277V 50/60Hz	D600*140	D23.6*5.5
LL0118S-90W	90W		D900*140	D35.4*5.5
LL0118S-180W	180W		D1200*140	D47.2*5.5

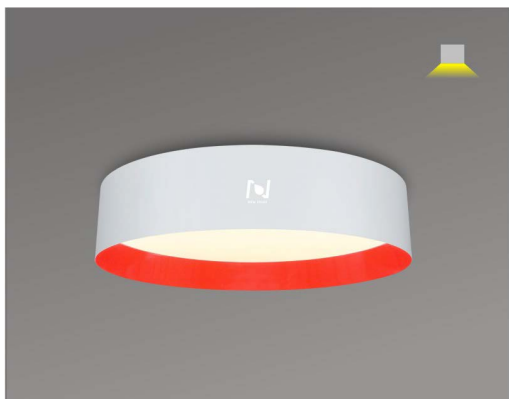

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: 120°
 Installation: Surface Mounted
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0118M-40W	40W	AC220-240V or AC120-277V 50/60Hz	D600*175	D23.6*6.9
LL0118M-90W	90W		D900*175	D35.4*6.9
LL0118M-180W	180W		D1200*175	D47.2*6.9



OSRAM

SAMSUNG



Architectural




Indoor



Protective grounding



High efficiency



No flicker



Damp location



Dimmable



DALI



5 Year Warranty



Color Tuning



RGB




BLACK/RED





WHITE/WHITE



RAL/RAL

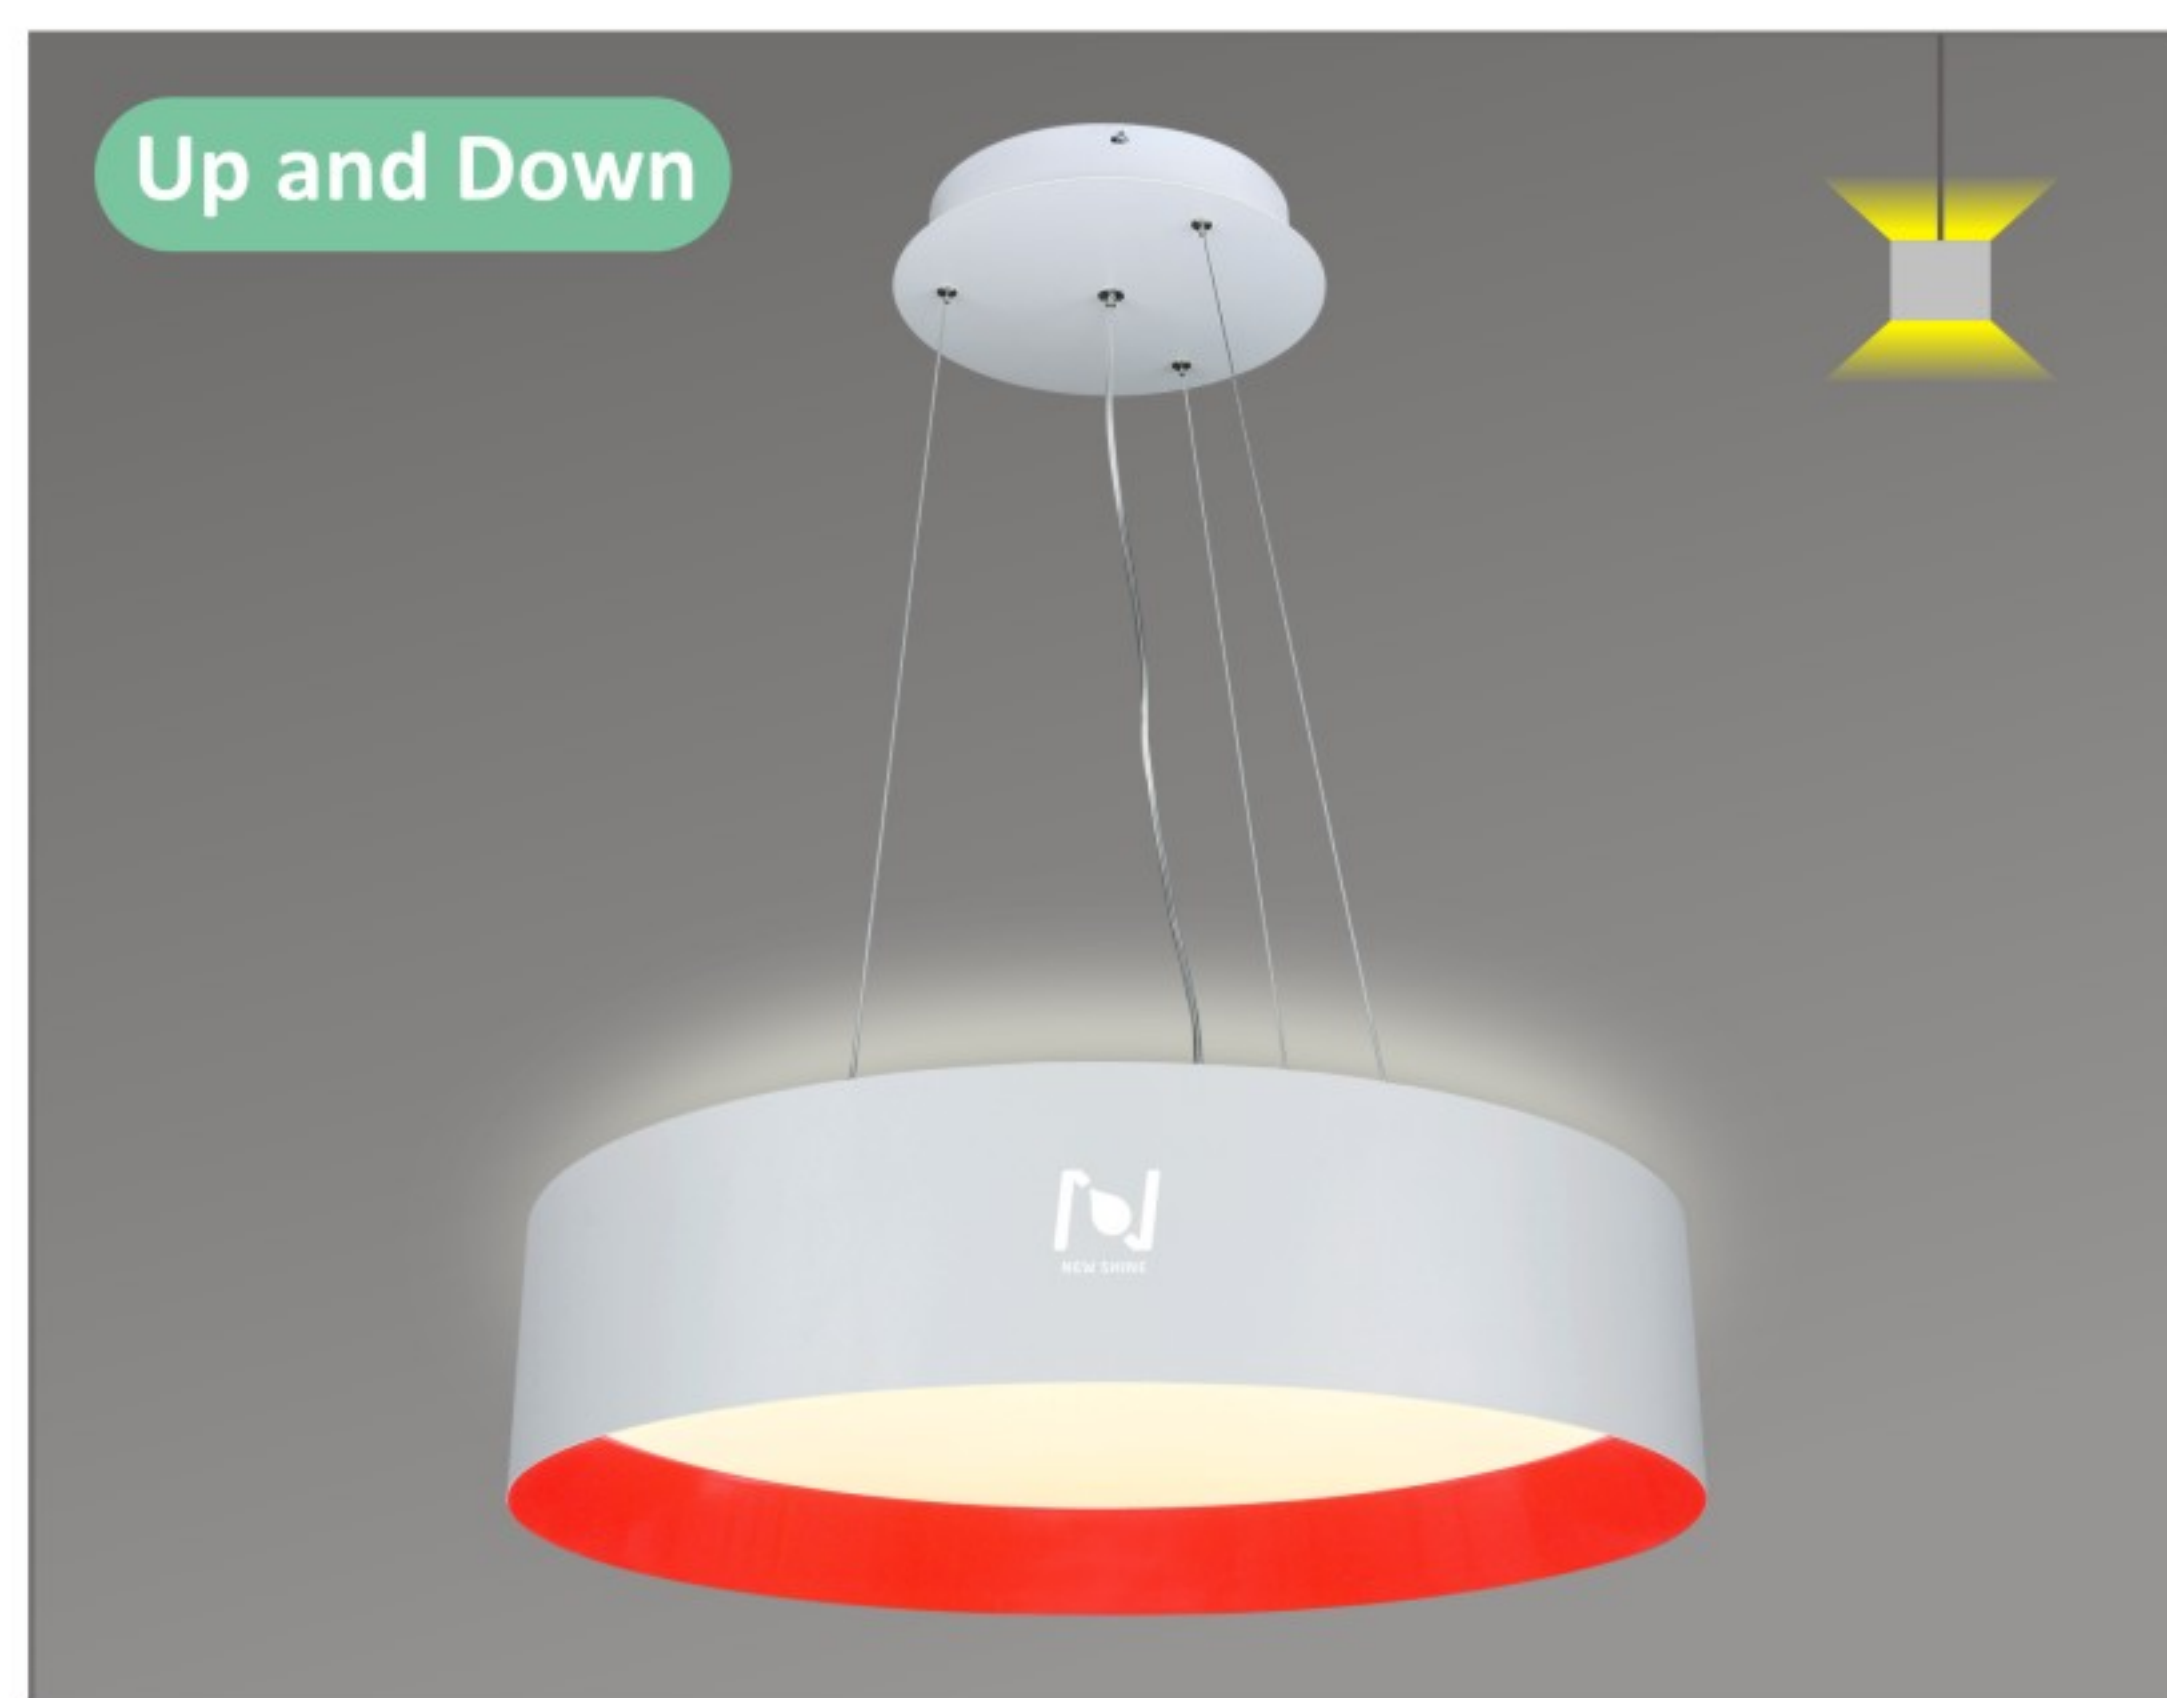



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 85
LED type: Samsung
Beam angle: $120^{\circ} \times 2$
Installation: Suspended
Material: Alu+PC

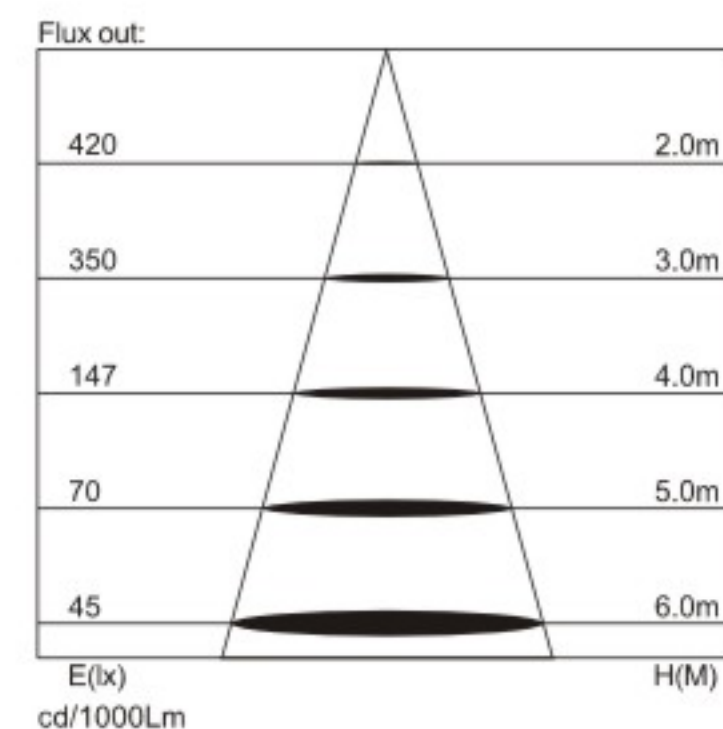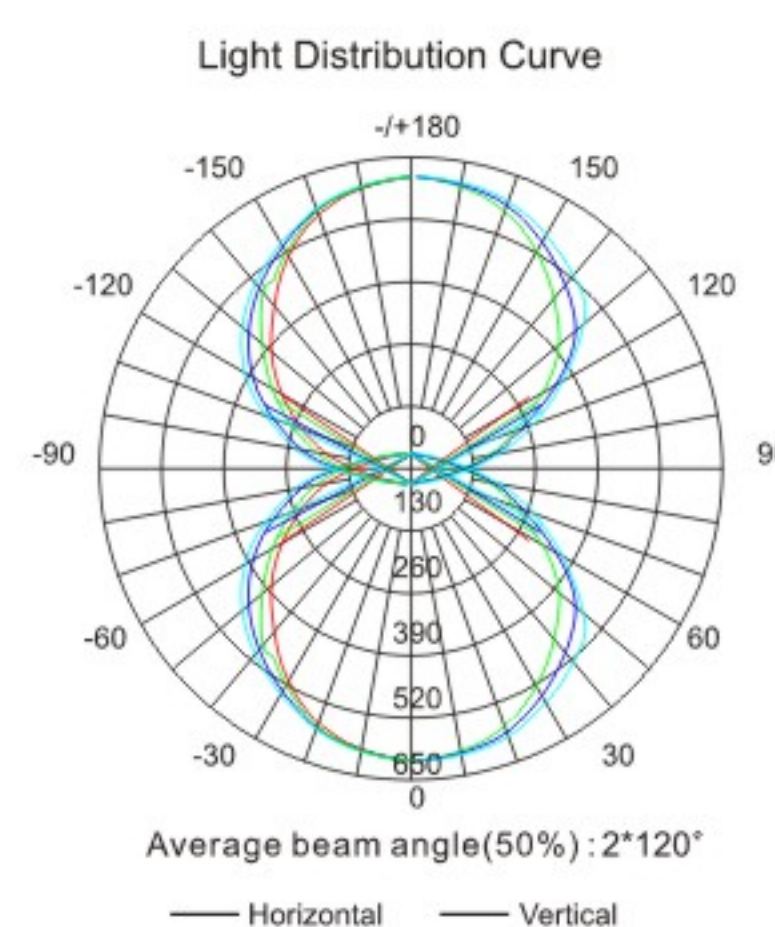

Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0118UDS-60W	60W	AC220-240V or AC120-277V 50/60Hz	D600*140	D23.6*5.5
LL0118UDS-120W	120W		D900*140	D35.4*5.5
LL0118UDS-220W	220W		D1200*140	D47.2*5.5



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 85
LED type: Samsung
Beam angle: $120^{\circ} \times 2$
Installation: Surface Mounted
Material: Alu+PC

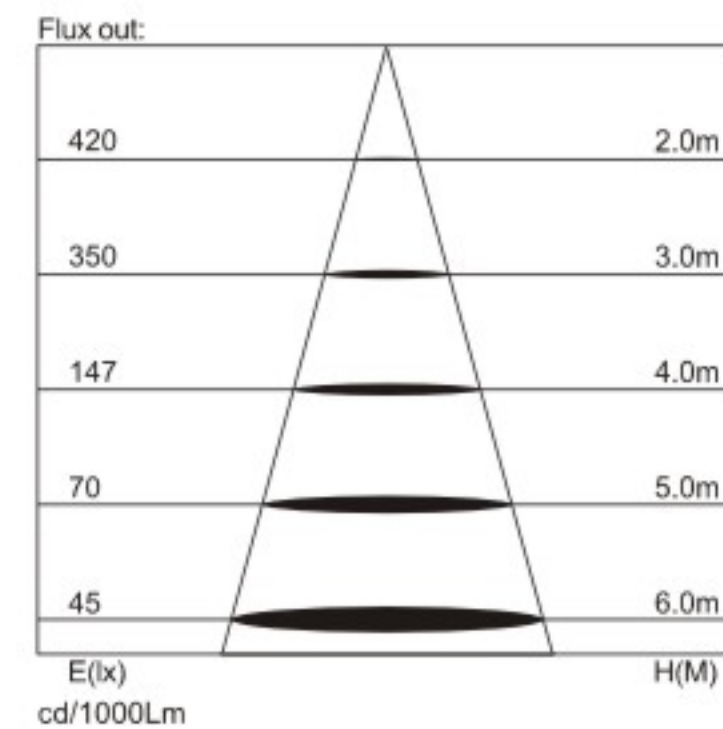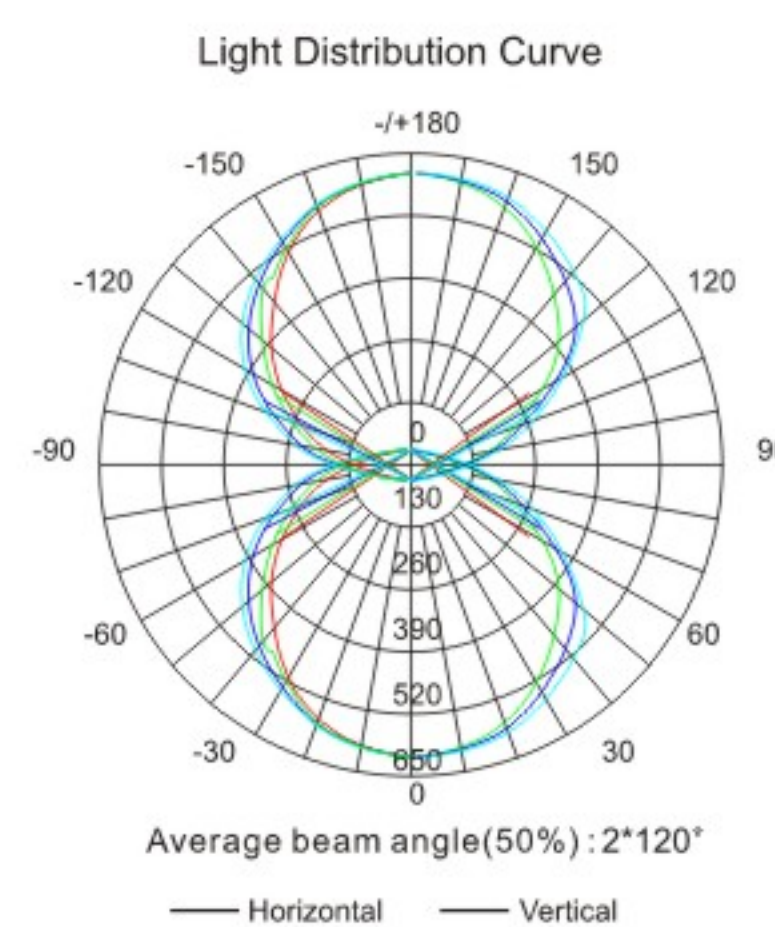


Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0118UDM-60W	60W	AC220-240V or AC120-277V 50/60Hz	D600*175	D23.6*6.9
LL0118UDM-120W	120W		D900*175	D35.4*6.9
LL0118UDM-220W	220W		D1200*175	D47.2*6.9



Diamond Series




CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended
 Material: Alu+PMMA

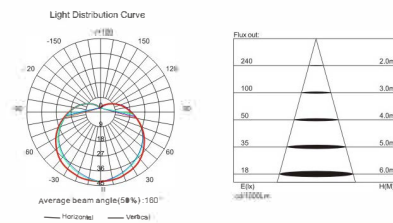


Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL020115S-12W-PRO	12W	AC220-240V or AC120-277V 50/60Hz	D800*88	D11.8*3.5
LL020115S-15W-PRO	15W		D360*88	D14.2*3.5
LL020125S-25W-PRO	25W		D450*88	D17.7*3.5
LL020136S-36W-PRO	36W		D600*88	D23.6*3.5
LL020150S-50W-PRO	50W		D800*88	D31.5*3.5

Diamond Series

OSRAM SAMSUNG

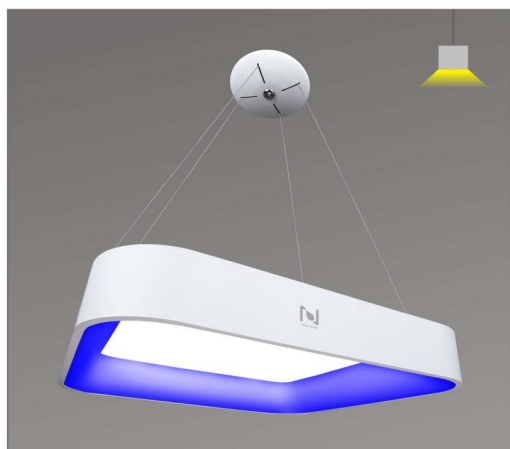


CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 160°
Installation: Suspended
Material: Alu+PMMA

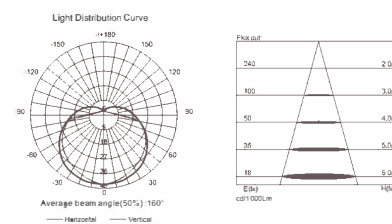

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL020215S-15W-PRO	15W	AC220-240V or AC120-277V 50/60Hz	360*360*88	14.2*14.2*3.5
LL020225S-25W-PRO	25W		450*450*88	17.7*17.7*3.5
LL020236S-36W-PRO	36W	AC120-277V 50/60Hz	600*600*88	23.6*23.6*3.5
LL020250S-50W-PRO	50W		800*800*88	31.5*31.5*3.5




CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 160°
Installation: Mounted
Material: Alu+PMMA

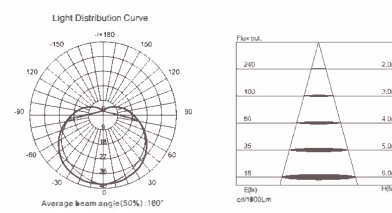

Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL020115M-12W-PRO	12W	AC220-240V or AC120-277V 50/60Hz	D300*116	D11.8*4.6
LL020115M-15W-PRO	15W		D360*116	D14.2*4.6
LL020125M-25W-PRO	25W		D450*116	D17.7*4.6
LL020136M-36W-PRO	36W		D600*116	D23.6*4.6
LL020150M-50W-PRO	50W		D800*116	D31.5*4.6



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 160°
Installation: Mounted
Material: Alu+PMMA

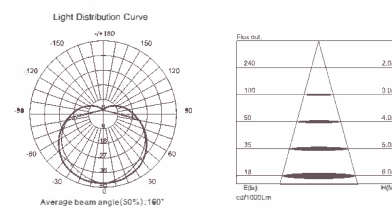

Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL020215M-12W-PRO	15W	AC220-240V or AC120-277V 50/60Hz	360*360*116	14.2*14.2*4.6
LL020225M-12W-PRO	25W		450*450*116	17.7*17.7*4.6
LL020236M-12W-PRO	36W	AC120-277V 50/60Hz	600*600*116	23.6*23.6*4.6
LL020250M-12W-PRO	50W		800*800*116	31.5*31.5*4.6

Sky Series






Features:

- Nice and elegant design to add beauty to space;
- High quality material for good reliability;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Long lifetime and energy efficient.

Application:

Hotel, shop, home, museum, restaurant, etc.

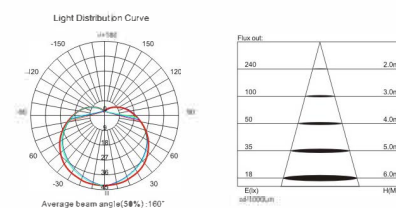

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) L*W*H	Size(Inch) L*W*H
LL0201S	LL0201S-15W	AC220-240V or AC120-277V 50/60Hz	15W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	160	Suspended	Alu+PMMA	D360*88	D14.2*3.5
	25W		D450*88									D17.7*3.5	
	36W		D600*88									D23.6*3.5	
	50W		D800*88									D31.5*3.5	
LL0202S	LL0202S-15W	AC220-240V or AC120-277V 50/60Hz	15W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	160	Suspended	Alu+PMMA	360*360*88	14.2*14.2*3.5
	25W		450*450*88									17.7*17.7*3.5	
	36W		600*600*88									23.6*23.6*3.5	
	50W		800*800*88									31.5*31.5*3.5	

Sky Series





OSRAM

SAMSUNG





CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Surface Mounted
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm)L*W*H	Size(Inch) L*W*H
LL0201M-15W	15W	AC100-240V or AC120-277V 50/60Hz	D360*116	D14.2*4.6
LL0201M-25W	25W		D450*116	D17.7*4.6
LL0201M-36W	36W		D600*116	D23.6*4.6
LL0201M-50W	50W		D800*116	D31.5*4.6



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Surface Mounted
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm)L*W*H	Size(Inch) L*W*H
LL0202M-15W	15W	AC100-240V or AC120-277V 50/60Hz	360*360*116	14.2*14.2*4.6
LL0202M-25W	25W		450*450*116	17.7*17.7*4.6
LL0202M-36W	36W		600*600*116	23.6*23.6*4.6
LL0202M-50W	50W		800*800*116	31.5*31.5*4.6



Feature:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, home, office, restaurant, public building, etc.

Jade Series



Jade Series

OSRAM

SAMSUNG



Architectural



Indoor



Protective grounding



High efficiency



No flicker



Damp location



Dimmable



Dali



5 Year



Color Tuning



RGB



SATIN WHITE





SATIN BLACK



RAL





CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 80
 LED type: Samsung
 Beam angle: 120°
 Installation: Suspended
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0114S-15W	15W	AC220-240V or AC120-277V 50/60Hz	D300*24	D11.8*0.9
LL0114S-20W	20W		D400*24	D15.7*0.9
LL0114S-30W	30W		D500*24	D19.7*0.9
LL0114S-40W	40W		D600*24	D23.6*0.9
LL0114S-90W	90W		D900*24	D35.4*0.9



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 80
 LED type: Samsung
 Beam angle: 120°
 Installation: Surface Mounted
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0114M-15W	15W	AC220-240V or AC120-277V 50/60Hz	D300*55	D11.8*2.2
LL0114M-20W	20W		D400*55	D15.7*2.2
LL0114M-30W	30W		D500*55	D19.7*2.2
LL0114M-40W	40W		D600*55	D23.6*2.2
LL0114M-90W	90W		D900*55	D35.4*2.2

Features:

- Novel design, beautiful lighting effect;
- High acoustic quality material to absorb noise;
- Different colors for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, meeting room, cinema, library, etc.

Acoustic Series

Acoustic Series







Features:

- Novel design, beautiful lighting effect;
- High acoustic quality material to absorb noise;
- Different colors for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, meeting room, cinema, library, etc.





OSRAM SAMSUNG



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0189H1S-1200	AC220-240V or AC120-277V 50/60Hz	36W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120	Suspended	Alu+PC+ polyester fiber	53*188*1200	2.1*7.4*47.2
LL0189H2S-1200		36W	or ≥ 90								53*288*1200	2.1*11.4*47.2
LL0189H3S-1200		36W									53*388*1200	2.1*15.3*47.2
LL0189H1UDS-1200	AC220-240V or AC120-277V 50/60Hz	50W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120*2	Suspended	Alu+PC+ polyester fiber	53*188*1200	2.1*7.4*47.2
LL0189H2UDS-1200		50W	or ≥ 90								53*288*1200	2.1*11.4*47.2
LL0189H3UDS-1200		50W									53*388*1200	2.1*15.3*47.2



Acoustic Series

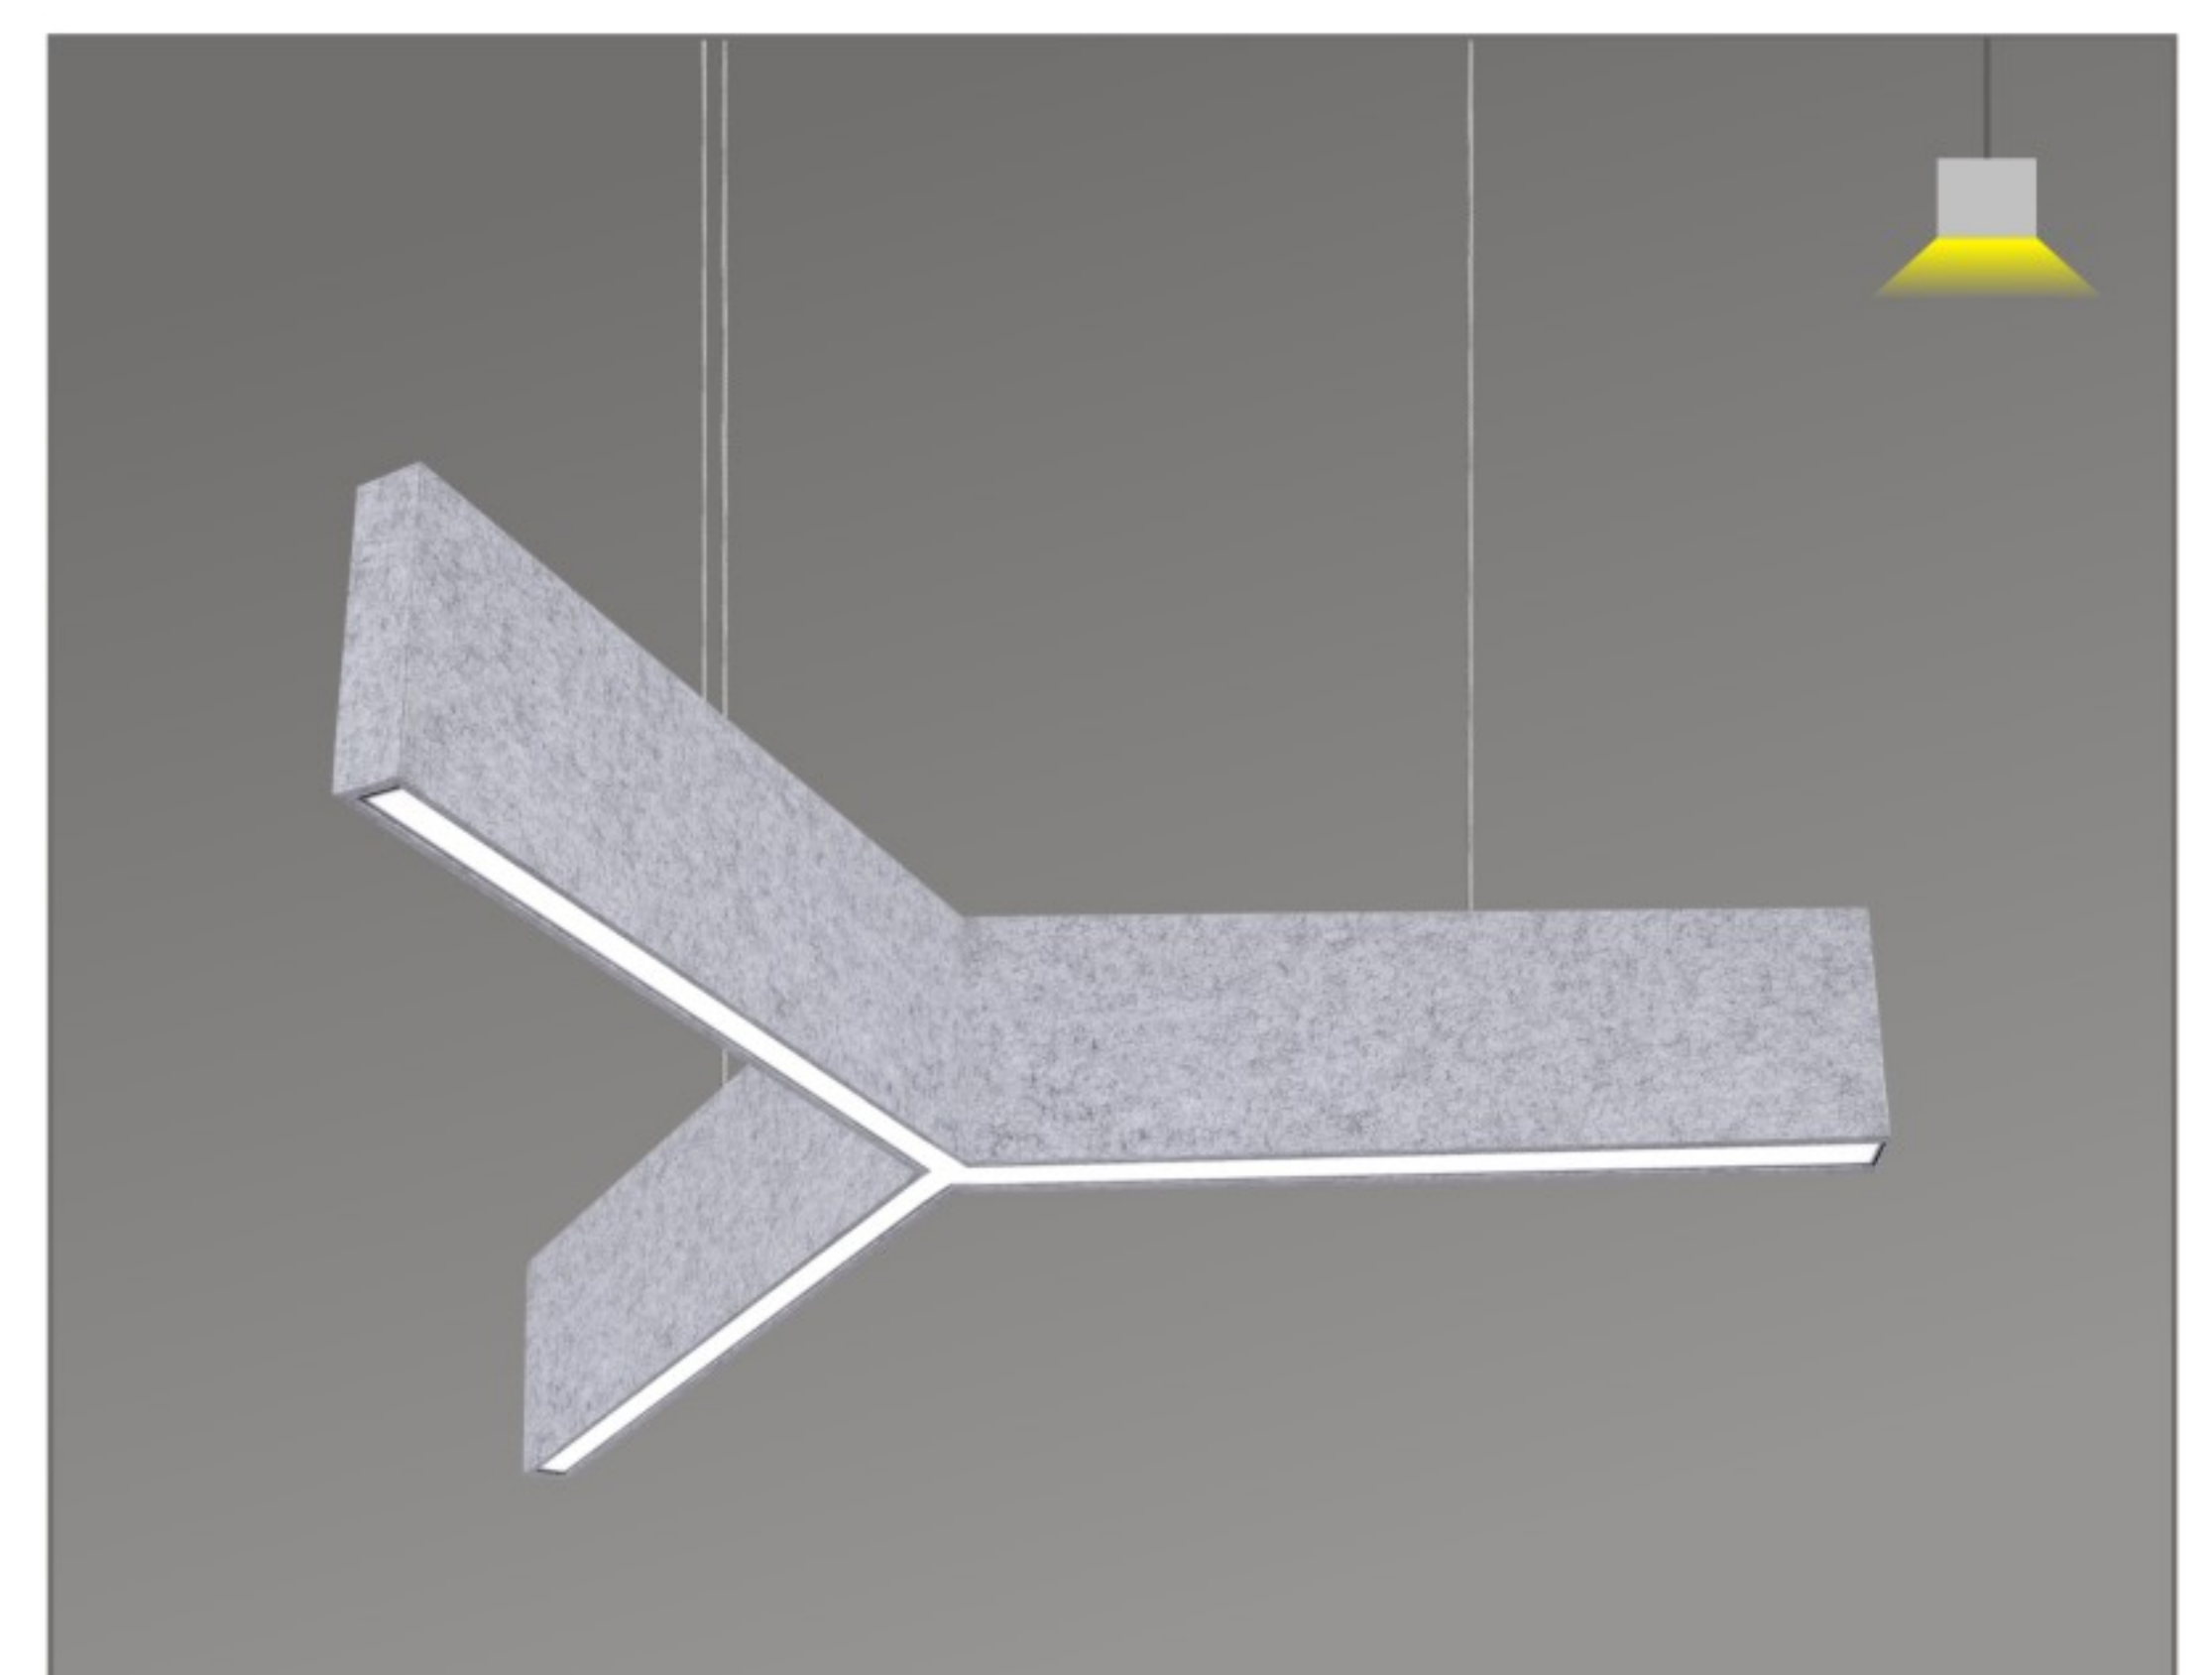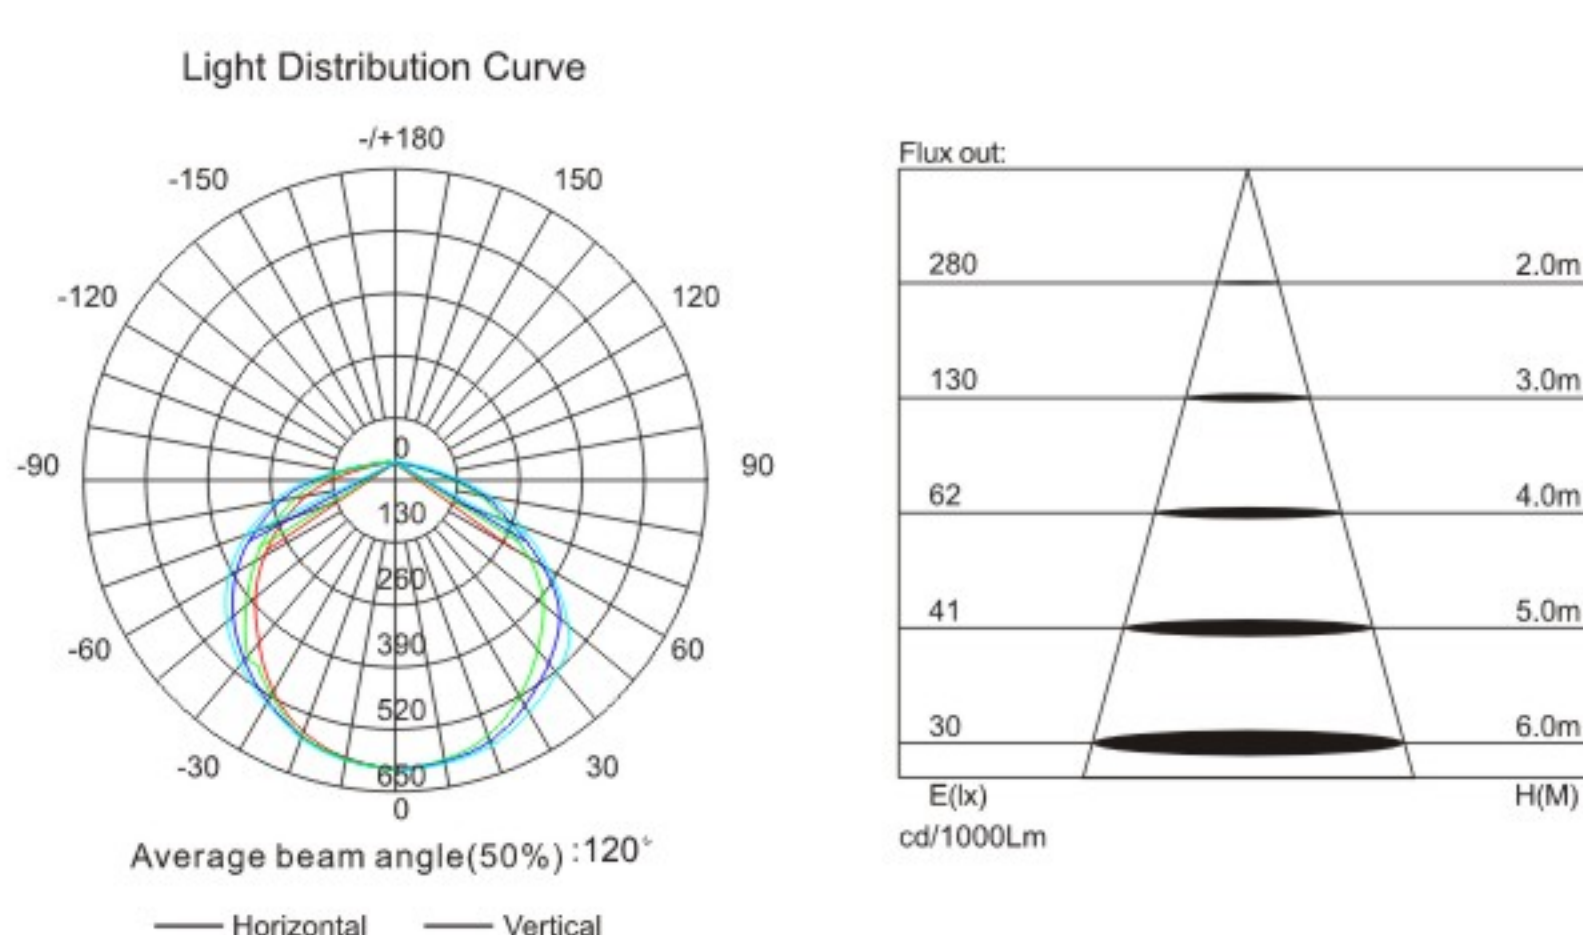


Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0190SAC-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120	Suspended	Alu+PC+ polyester fiber	563*501*188(L300)	22.2*19.7*7.4
LL0190SAC-80W		80W									1081*963*188(L600)	42.6*37.9*7.4
LL0190SAC-120W		120W									1600*1426*188(L900)	63.0*56.1*7.4
LL0190UDSAC-50W	AC220-240V or AC120-277V 50/60Hz	50W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105	Osram	120*2	Suspended	Alu+PC+ polyester fiber	563*501*188(L300)	22.2*19.7*7.4
LL0190UDSAC-100W		100W									1081*963*188(L600)	42.6*37.9*7.4
LL0190UDSAC-140W		140W									1600*1426*188(L900)	63.0*56.1*7.4





Acoustic Series

OSRAM SAMSUNG

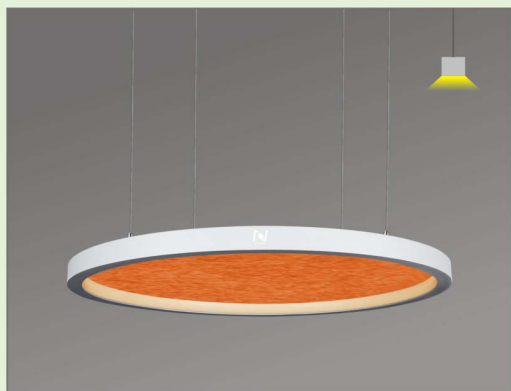

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 300°
 Installation: Suspended
 Material: Alu+PC+polyester fiber



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL01255AC-32W	32W	AC220-240V or AC120-277V 50/60Hz	D600*35*32	D23.6*1.4*1.3
LL01255AC-40W	40W		D900*35*32	D35.4*1.4*1.3
LL01255AC-70W	70W		D1200*35*32	D47.2*1.4*1.3
LL01255AC-80W	80W		D1500*35*32	D59.1*1.4*1.3



Model	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0186SAC-480	Suspended	Alu+ polyester fiber	480*416*80(ID480)	18.9*16.4*3.1
LL0186SAC-600			600*520*80(ID600)	23.6*20.5*3.1
LL0186SAC-900			900*780*80(ID900)	35.4*30.7*3.1
LL0186SAC-1200			1200*1040*80(ID1200)	47.2*40.9*3.1



Model	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0186MAC-480	Surface Mounted	Alu+ polyester fiber	480*416*95(ID480)	18.9*16.4*3.7
LL0186MAC-600			600*520*95(ID600)	23.6*20.5*3.7
LL0186MAC-900			900*780*95(ID900)	35.4*30.7*3.7
LL0186MAC-1200			1200*1040*95(ID1200)	47.2*40.9*3.7



Acoustic Series





OSRAM

SAMSUNG



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended / Surface Mounted
 Material: Alu+PMMA+polyester fiber



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0201SAC-15W	15W	AC220-240V or AC120-277V 50/60Hz	D360*88	D14.2*3.5
LL0201SAC-25W	25W		D450*88	D17.7*3.5
LL0201SAC-36W	36W		D600*88	D23.6*3.5
LL0201SAC-50W	50W		D800*88	D31.5*3.5
LL0201MAC-15W	15W	AC220-240V or AC120-277V 50/60Hz	D360*116	D14.2*4.6
LL0201MAC-25W	25W		D450*116	D17.7*4.6
LL0201MAC-36W	36W		D600*116	D23.6*4.6
LL0201MAC-50W	50W		D800*116	D31.5*4.6



OSRAM

SAMSUNG



Architectural



Indoor



Protective grounding



High efficiency



No flicker



Damp location



Dimmable



Dial



5 Year



Color tuning



RGB



Yellow



Cobalt



Sky Blue



Orange



Red



Lime Green



Anthracite



Light Grey



Jet Black



CRI(Ra): ≥ 80 or ≥ 90

CCT(K): 3000/4000/5000

PF: ≥ 0.9



Efficiency(LM/W): 70

LED type: Samsung

Beam angle: 120°

Installation: Suspended/Surface Mounted

Material: Alu+PMMA+polyester fiber



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0118SAC-20W	20W	AC220-240V or AC120-277V 50/60Hz	D600*140	D23.6*5.5
LL0118SAC-40W	40W		D900*140	D35.4*5.5
LL0118SAC-40W	40W		D1200*140	D47.2*5.5
LL0118MAC-20W	20W	AC220-240V or AC120-277V 50/60Hz	D600*175	D23.6*6.9
LL0118MAC-40W	40W		D900*175	D35.4*6.9
LL0118MAC-40W	40W		D1200*175	D47.2*6.9

Acoustic Lighting Series






Features:

- Novel design, beautiful lighting effect;
- High acoustic quality material to absorb noise;
- Different colors for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, meeting room, cinema, library, etc.



Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0202SAC	LL0202SAC-15W	AC220-240V or AC120-277V 50/60Hz	15W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	160	Suspended	Alu+PMMA +polyester fibre	360*360*88	14.2*14.2*3.5
	LL0202SAC-25W		25W									450*450*88	17.7*17.7*3.5
	LL0202SAC-36W		36W									600*600*88	23.6*23.6*3.5
	LL0202SAC-50W		50W									800*800*88	31.5*31.5*3.5
LL0202MAC	LL0202MAC-15W	AC220-240V or AC120-277V 50/60Hz	15W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	160	Surface Mounted	Alu+PMMA +polyester fibre	360*360*116	14.2*14.2*4.6
	LL0202MAC-25W		25W									450*450*116	17.7*17.7*4.6
	LL0202MAC-36W		36W									600*600*116	23.6*23.6*4.6
	LL0202MAC-50W		50W									800*800*116	31.5*31.5*4.6



Round Drum Light Series

OSRAM

SAMSUNG

 Architectural

 Indoor

 Protective grounding

 High efficiency

 No flicker

 Damp location

 Dimmable

 DALI

 5 Year Warranty

 Color Tuning

 RGB

 YL
Yellow

 CB
Cobalt

 SB
Sky Blue

 OG
Orange

 RD
Red

 LG
Lime Green


 AT
Anthracite

 LR
Light Grey

 JB
Jet Black



CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 85
LED type: Samsung
Beam angle: 120°
Installation: Suspended
Material: Alu+PC+polyester fiber

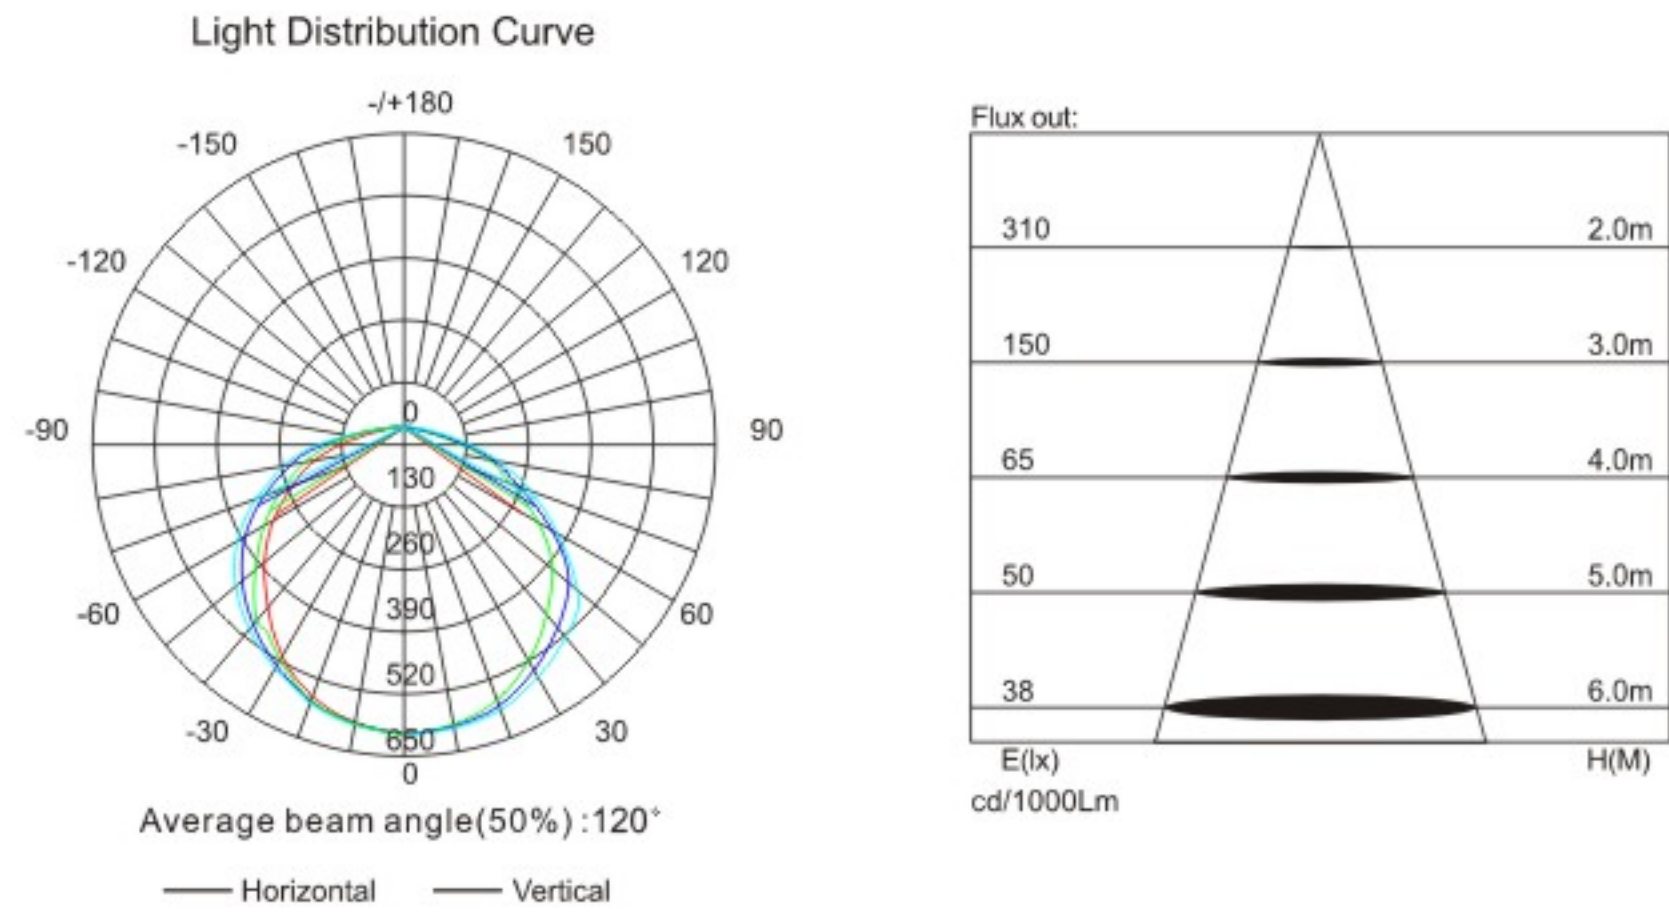

Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0112S-25W-AC	25W	AC220-240V or AC120-277V 50/60Hz	D480*H300/600/900/1200	D18.9*H11.8"/23.6"/35.4"/47.2"
LL0112S-40W-AC	40W		D600*H300/600/900/1200	D23.6*H11.8"/23.6"/35.4"/47.2"
LL0112S-90W-AC	90W		D900*H300/600/900/1200	D35.4*H11.8"/23.6"/35.4"/47.2"
LL0112S-180W-AC	180W		D1200*H300/600/900/1200	D47.2*H11.8"/23.6"/35.4"/47.2"
LL0112M-25W-AC	25W	AC220-240V or AC120-277V 50/60Hz	D480*H300/600/900/1200	D18.9*H11.8"/23.6"/35.4"/47.2"
LL0112M-40W-AC	40W		D600*H300/600/900/1200	D23.6*H11.8"/23.6"/35.4"/47.2"
LL0112M-90W-AC	90W		D900*H300/600/900/1200	D35.4*H11.8"/23.6"/35.4"/47.2"
LL0112M-180W-AC	180W		D1200*H300/600/900/1200	D47.2*H11.8"/23.6"/35.4"/47.2"



Square Drum Light Series

OSRAM

SAMSUNG



Architectural



Indoor



Protective grounding



High efficiency



No flicker



Damp location



Dimmable



DALI



5 Year



Color Tuning



RGB



Yellow



Cobalt



Sky Blue



Orange



Red



Lime Green




Anthracite



Light Grey





Jet Black

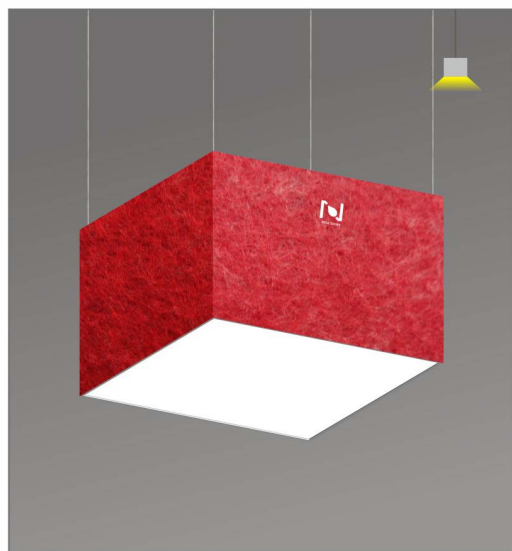

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: 120°
 Installation: Suspended
 Material: Alu+PC+polyester fiber

Light Distribution Curve



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0185S-25W-AC	25W	AC220-240V or AC120-277V 50/60Hz	480*480*H300/600/900/1200	18.9*18.9*H11.8"/23.6"/35.4"/47.2"
LL0185S-40W-AC	40W		600*600*H300/600/900/1200	23.6*23.6*H11.8"/23.6"/35.4"/47.2"
LL0185S-90W-AC	90W		900*900*H300/600/900/1200	35.4*35.4*H11.8"/23.6"/35.4"/47.2"
LL0185S-180W-AC	180W		1200*1200*H300/600/900/1200	47.2*47.2*H11.8"/23.6"/35.4"/47.2"
LL0185M-25W-AC	20W	AC220-240V or AC120-277V 50/60Hz	480*480*H300/600/900/1200	18.9*18.9*H11.8"/23.6"/35.4"/47.2"
LL0185M-40W-AC	40W		600*600*H300/600/900/1200	23.6*23.6*H11.8"/23.6"/35.4"/47.2"
LL0185M-90W-AC	90W		900*900*H300/600/900/1200	35.4*35.4*H11.8"/23.6"/35.4"/47.2"
LL0185M-180W-AC	180W		1200*1200*H300/600/900/1200	47.2*47.2*H11.8"/23.6"/35.4"/47.2"



Hexagon Drum Light Series

OSRAM

SAMSUNG

 Architectural

 Indoor

 Protective grounding

 High efficiency

 No flicker

 Damp location

 Dimmable

 DALI

 5 Year Warranty

 Color Tuning

 RGB

 YL
Yellow

 CB
Cobalt

 SB
Sky Blue

 OG
Orange


 RD
Red

 LG
Lime Green


 AT
Anthracite

 LR
Light Grey

 JB
Jet Black


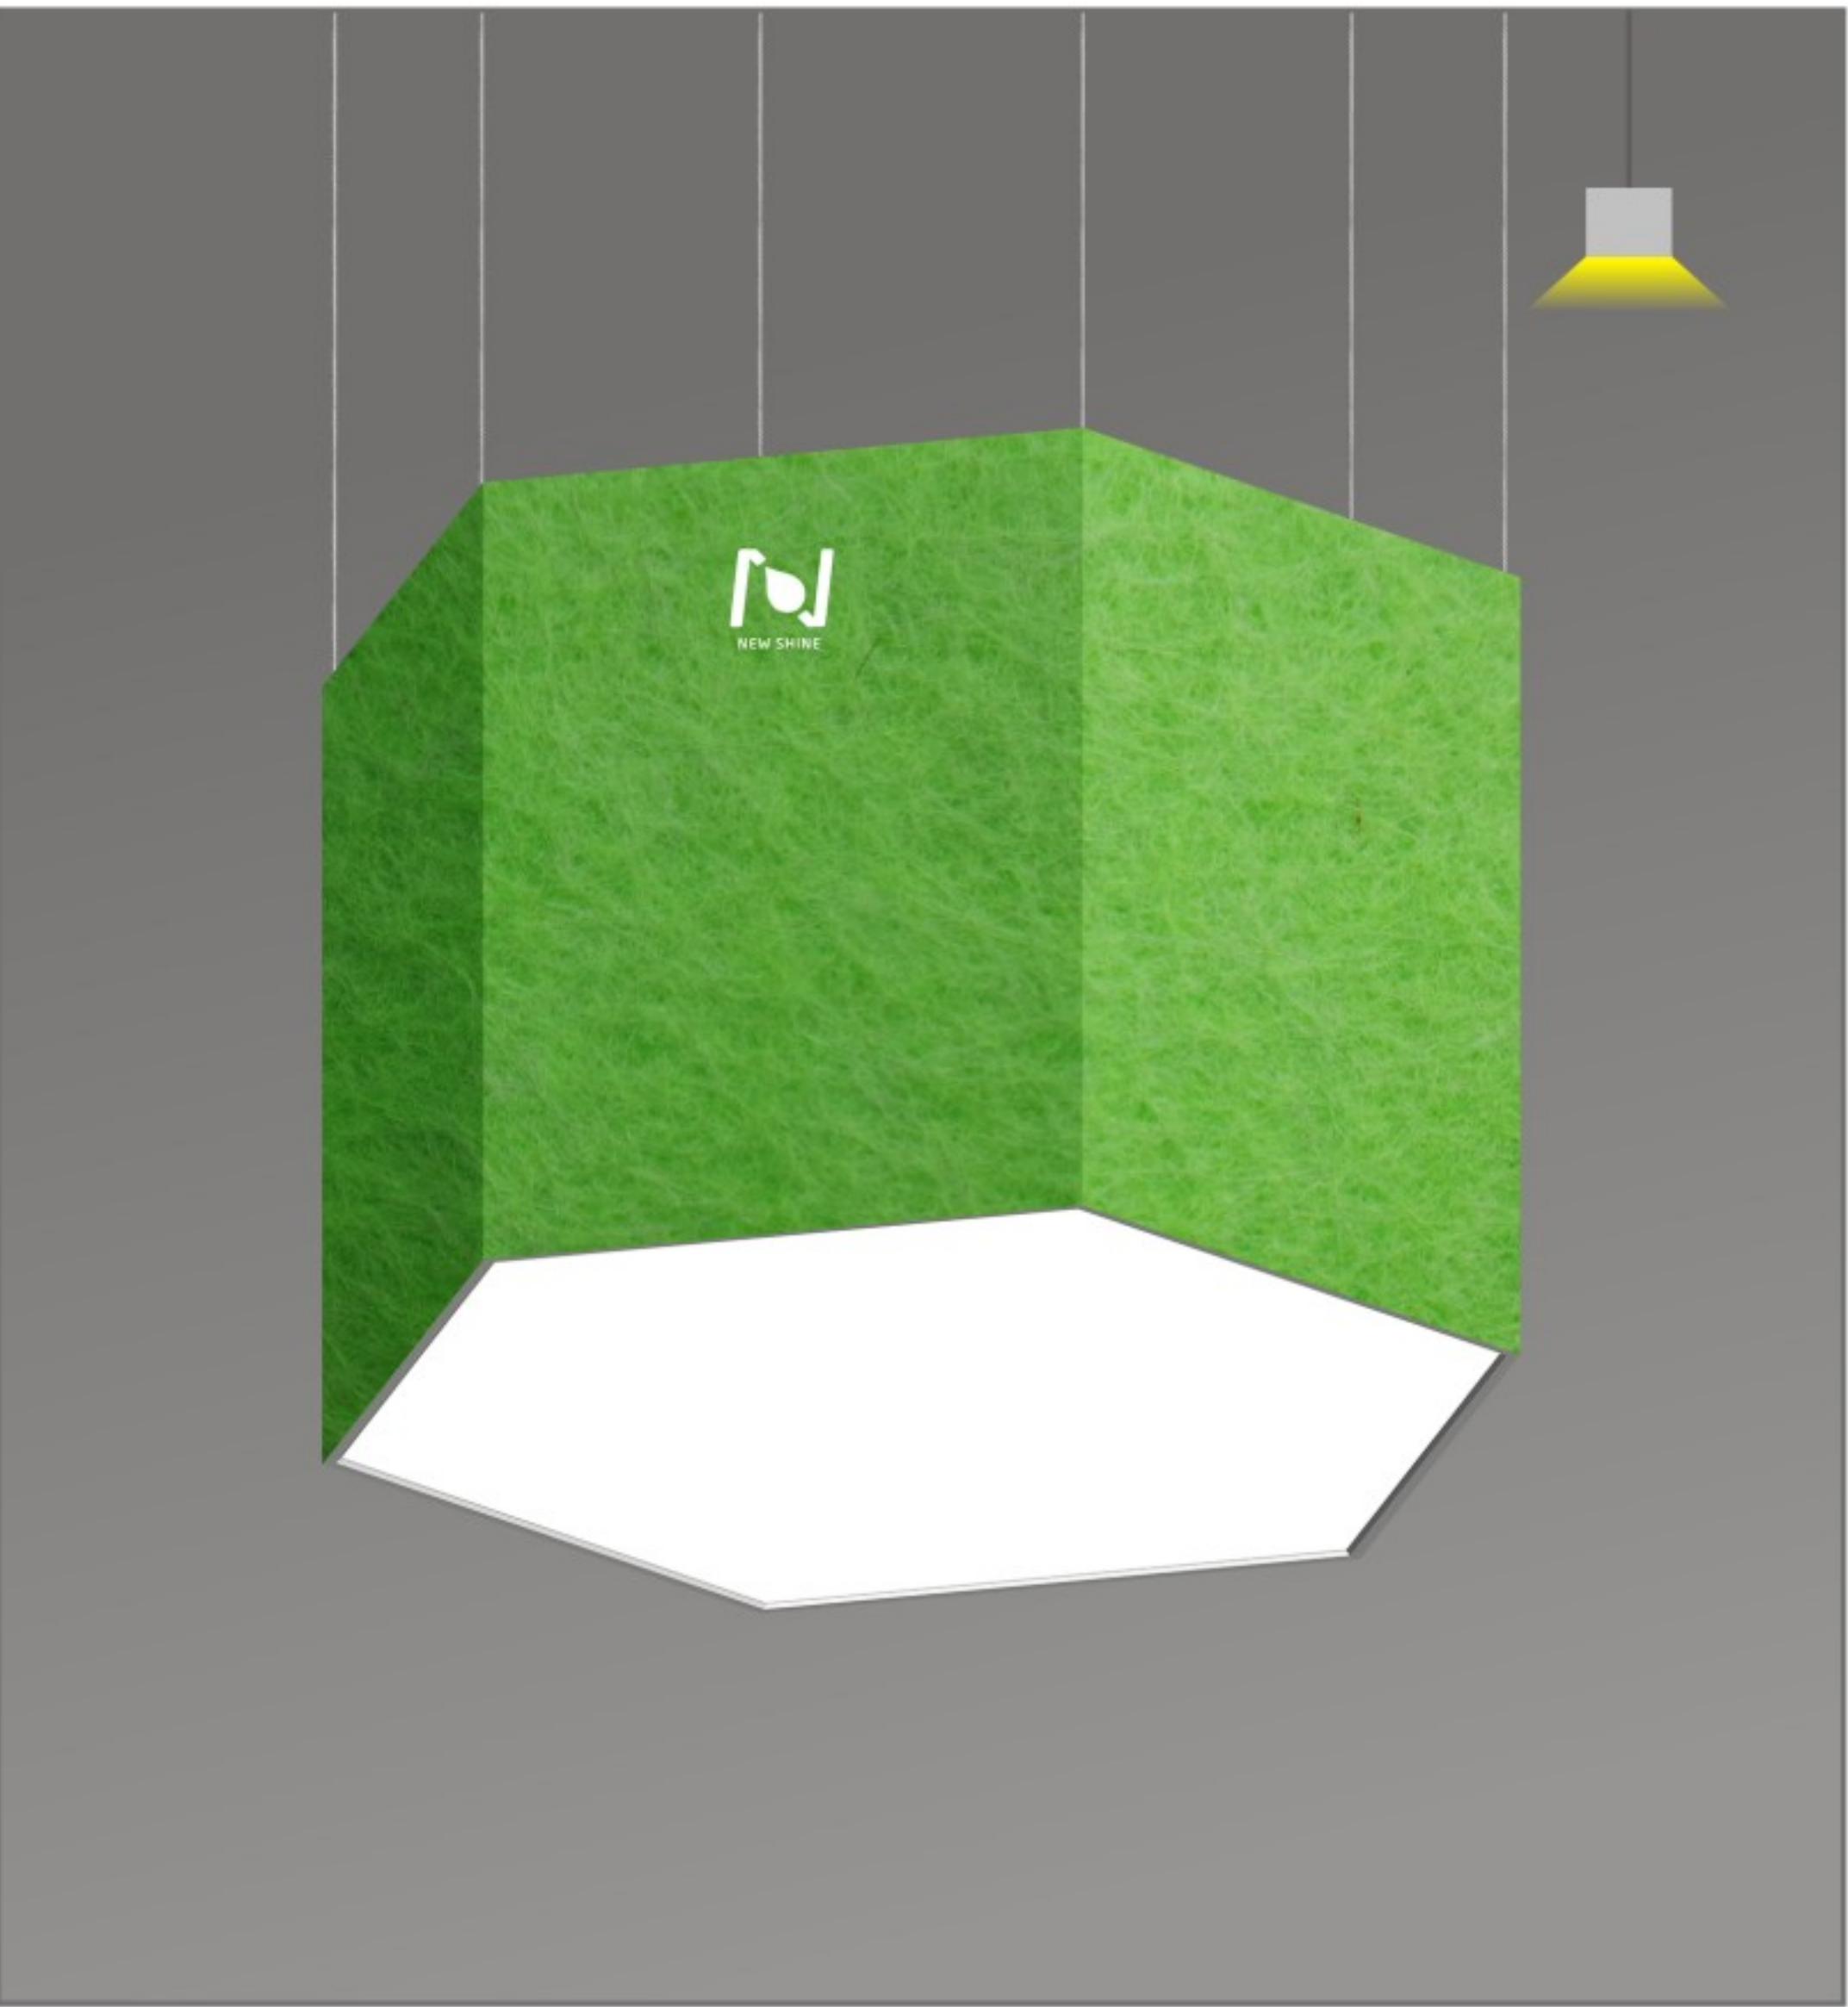


CRI(Ra): ≥ 80 or ≥ 90
CCT(K): 3000/4000/5000
PF: ≥ 0.9
Efficiency(LM/W): 85
LED type: Samsung
Beam angle: 120°
Installation: Suspended
Material: Alu+PC+polyester fiber

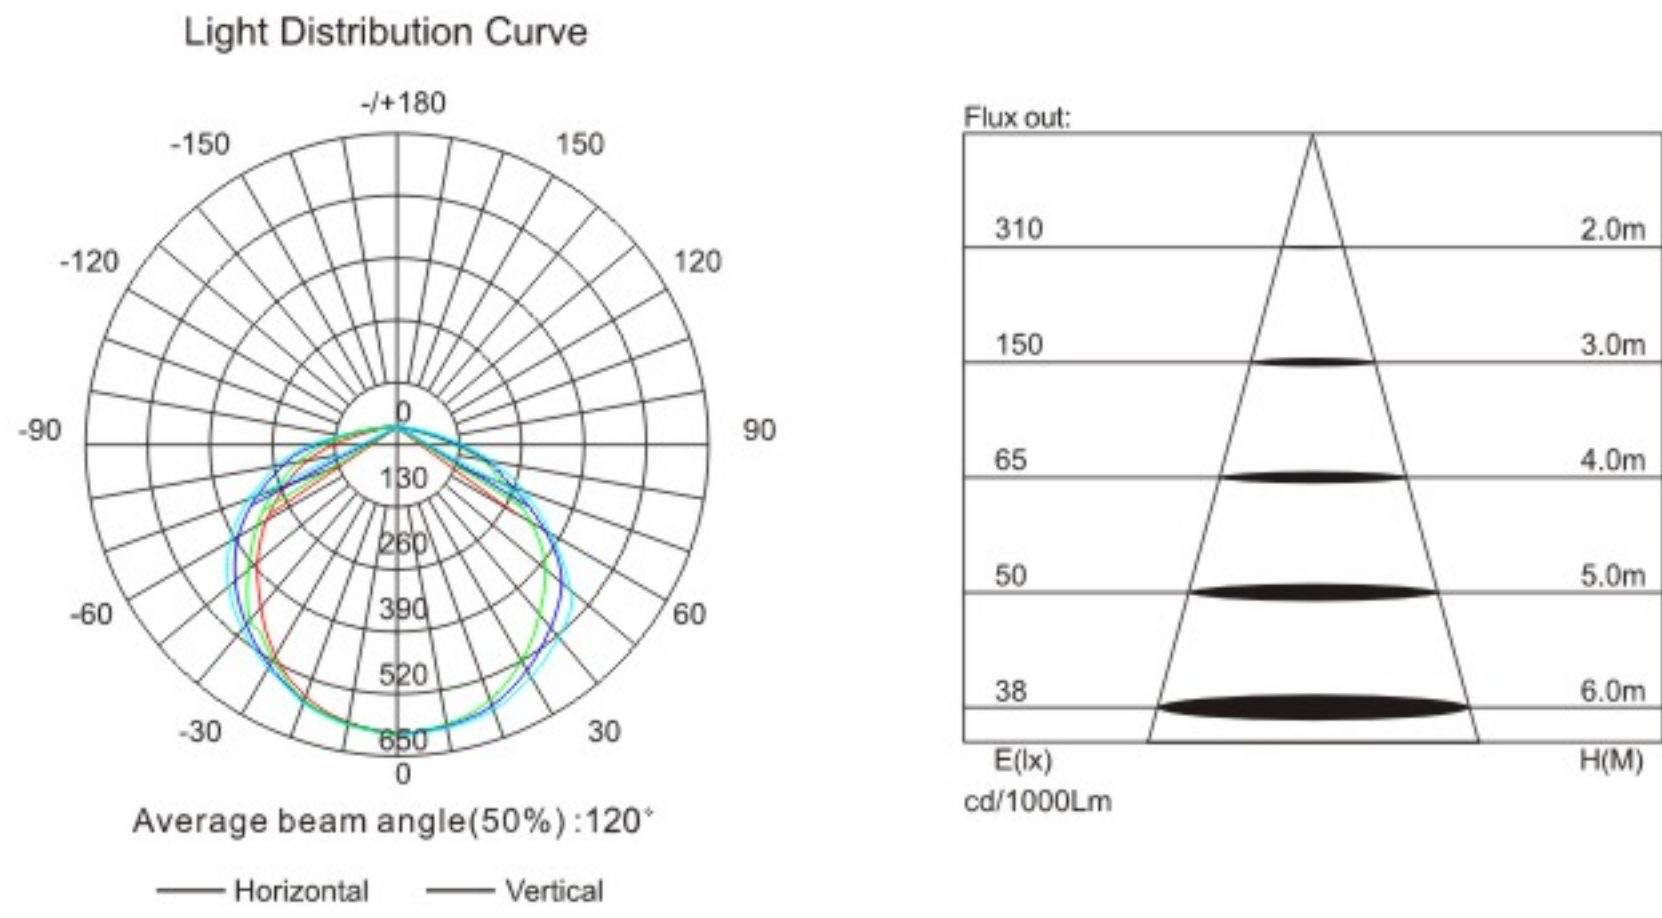


Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL0185S-25W-AC	25W	AC220-240V or AC120-277V 50/60Hz	480*416*H300/600/900/1200	18.9*16.4*H11.8"/23.6"/35.4"/47.2"
LL0185S-40W-AC	40W		600*520*H300/600/900/1200	23.6*20.5*H11.8"/23.6"/35.4"/47.2"
LL0185S-90W-AC	90W		900*780*H300/600/900/1200	35.4*30.7*H11.8"/23.6"/35.4"/47.2"
LL0185S-180W-AC	180W		1200*1038*H300/600/900/1200	47.2*40.9*H11.8"/23.6"/35.4"/47.2"
LL0185M-25W-AC	20W	AC220-240V or AC120-277V 50/60Hz	480*416*H300/600/900/1200	18.9*16.4*H11.8"/23.6"/35.4"/47.2"
LL0185M-40W-AC	40W		600*520*H300/600/900/1200	23.6*20.5*H11.8"/23.6"/35.4"/47.2"
LL0185M-90W-AC	90W		900*780*H300/600/900/1200	35.4*30.7*H11.8"/23.6"/35.4"/47.2"
LL0185M-180W-AC	180W		1200*1038*H300/600/900/1200	47.2*40.9*H11.8"/23.6"/35.4"/47.2"

Panel Series



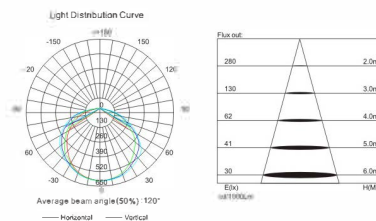
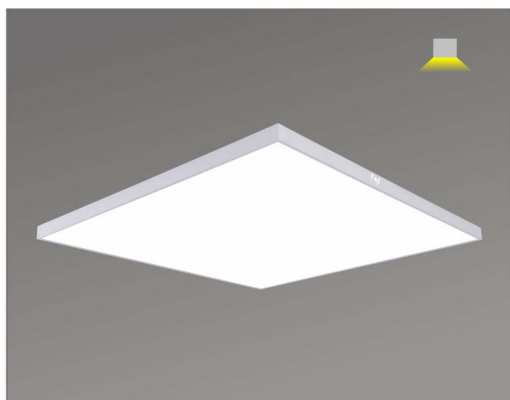


Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0603R3030-25W	AC220-240V or AC120-277V 50/60Hz	25W	≧ 80 or ≧ 90	3000K/ 4000K/ 5000K	≧ 0.9	105	Samsung	120	Recessed	Alu+PMMA	300*300*24	11.8*11.8*0.9
LL0603R6060-40W		40W									600*600*24	23.6*23.6*0.9
LL0603R3012-40W		40W									300*1200*24	11.8*47.2*0.9
LL0603R6012-80W		80W									600*1200*24	23.6*47.2*0.9

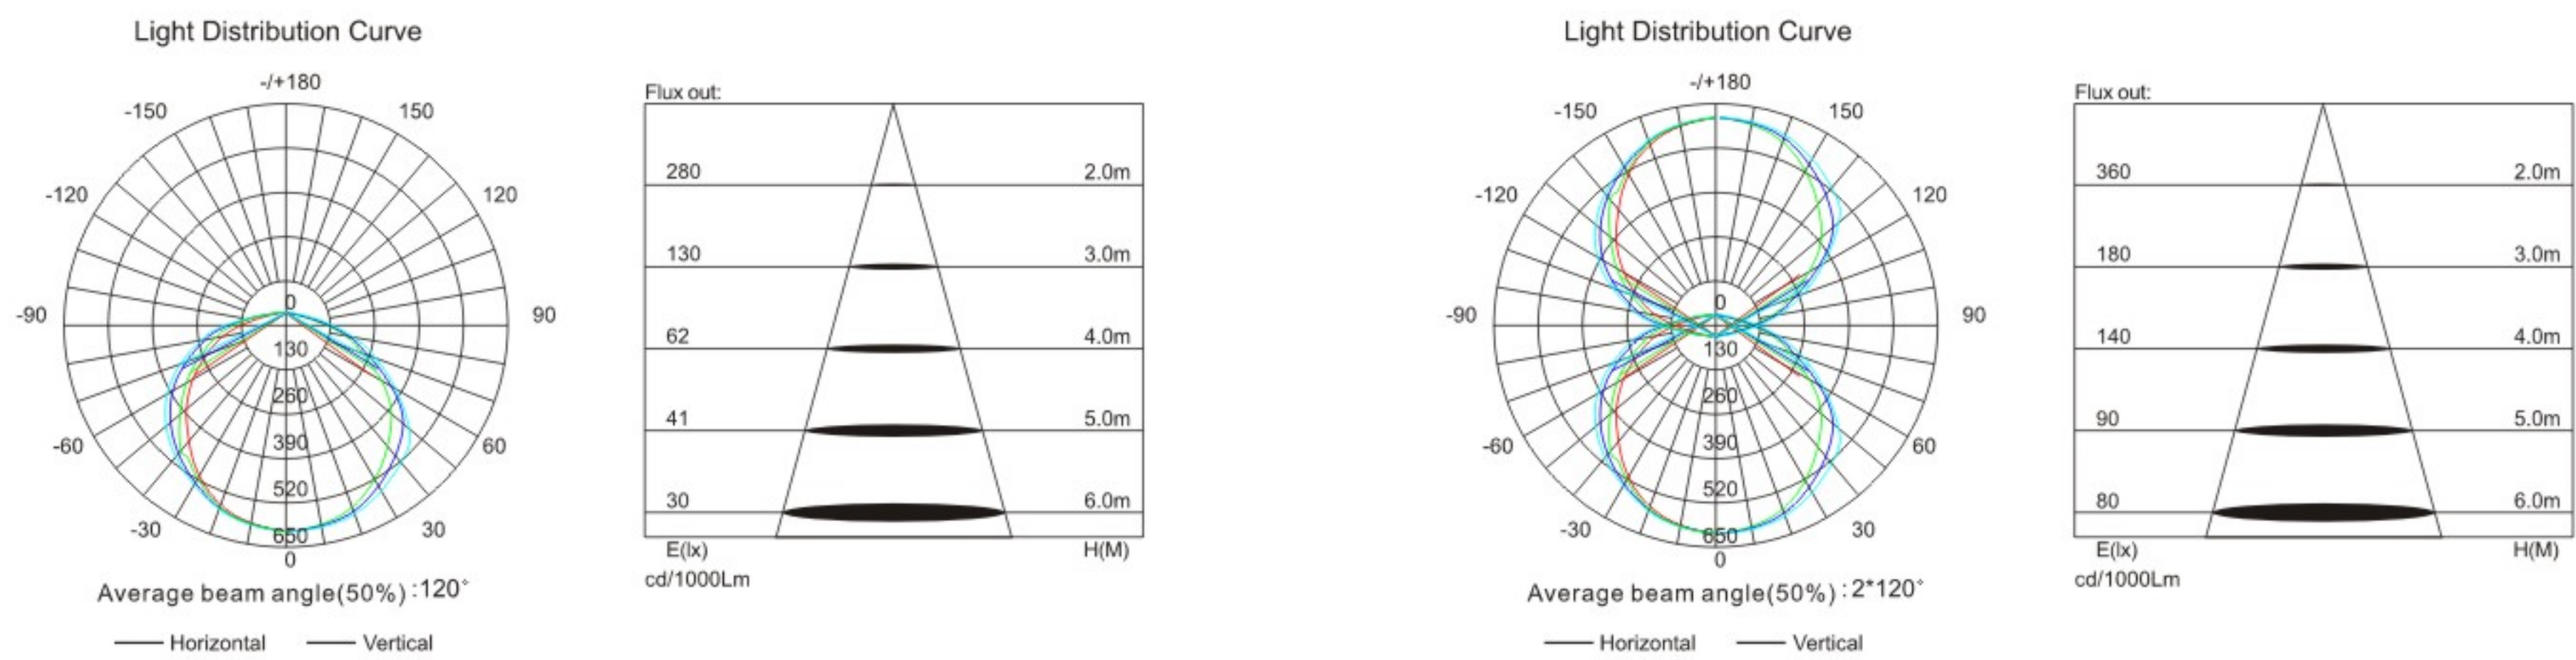

Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0185M-25W	AC220-240V or AC120-277V 50/60Hz	25W	≧ 80 or ≧ 90	3000K/ 4000K/ 5000K	≧ 0.9	85	Samsung	120	Surface Mounted	Alu+PC	480*480*95	18.9*18.9*3.7
LL0185M-40W		40W									600*600*95	23.6*23.6*3.7
LL0185M-90W		90W									900*900*95	35.4*35.4*3.7
LL0185M-180W		180W									1200*1200*95	47.2*47.2*3.7
LL0185S-25W	AC220-240V or AC120-277V 50/60Hz	25W	≧ 80 or ≧ 90	3000K/ 4000K/ 5000K	≧ 0.9	85	Samsung	120	Suspended	Alu+PC	480*480*80	18.9*18.9*3.1
LL0185S-40W		40W									600*600*80	23.6*23.6*3.1
LL0185S-90W		90W									900*900*80	35.4*35.4*3.1
LL0185S-180W		180W									1200*1200*80	47.2*47.2*3.1
LL0185UDM-50W	AC220-240V or AC120-277V 50/60Hz	50W	≧ 80 or ≧ 90	3000K/ 4000K/ 5000K	≧ 0.9	85	Samsung	120*2	Surface Mounted	Alu+PC	480*480*95	18.9*18.9*3.7
LL0185UDM-80W		80W									600*600*95	23.6*23.6*3.7
LL0185UDM-120W		120W									900*900*95	35.4*35.4*3.7
LL0185UDM-220W		220W									1200*1200*95	47.2*47.2*3.7
LL0185UDS-50W	AC220-240V or AC120-277V 50/60Hz	50W	≧ 80 or ≧ 90	3000K/ 4000K/ 5000K	≧ 0.9	85	Samsung	120*2	Suspended	Alu+PC	480*480*80	18.9*18.9*3.1
LL0185UDS-80W		80W									600*600*80	23.6*23.6*3.1
LL0185UDS-120W		120W									900*900*80	35.4*35.4*3.1
LL0185UDS-220W		220W									1200*1200*80	47.2*47.2*3.1

Panel Series




OSRAM

SAMSUNG



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0186M-25W	AC220-240V or AC120-277V 50/60Hz	25W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	85	Samsung	120	Surface Mounted	Alu+PC	480*416*95(ID480)	18.9*16.4*3.7
LL0186M-40W		40W									600*520*95(ID600)	23.6*20.5*3.7
LL0186M-90W		90W									900*780*95(ID900)	35.4*30.7*3.7
LL0186M-180W		180W									1200*1040*95(ID1200)	47.2*40.9*3.7
LL0186S-25W	AC220-240V or AC120-277V 50/60Hz	25W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	85	Samsung	120	Suspended	Alu+PC	480*416*80(ID480)	18.9*16.4*3.1
LL0186S-40W		40W									600*520*80(ID600)	23.6*20.5*3.1
LL0186S-90W		90W									900*780*80(ID900)	35.4*30.7*3.1
LL0186S-180W		180W									1200*1040*80(ID1200)	47.2*40.9*3.1
LL0186UDM-50W	AC220-240V or AC120-277V 50/60Hz	50W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	85	Samsung	120*2	Surface Mounted	Alu+PC	480*416*95(ID480)	18.9*16.4*3.7
LL0186UDM-80W		80W									600*520*95(ID600)	23.6*20.5*3.7
LL0186UDM-120W		120W									900*780*95(ID900)	35.4*30.7*3.7
LL0186UDM-220W		220W									1200*1040*95(ID1200)	47.2*40.9*3.7
LL0186UDS-50W	AC220-240V or AC120-277V 50/60Hz	50W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	85	Samsung	120*2	Suspended	Alu+PC	480*416*80(ID480)	18.9*16.4*3.1
LL0186UDS-80W		80W									600*520*80(ID600)	23.6*20.5*3.1
LL0186UDS-120W		120W									900*780*80(ID900)	35.4*30.7*3.1
LL0186UDS-220W		220W									1200*1040*80(ID1200)	47.2*40.9*3.1

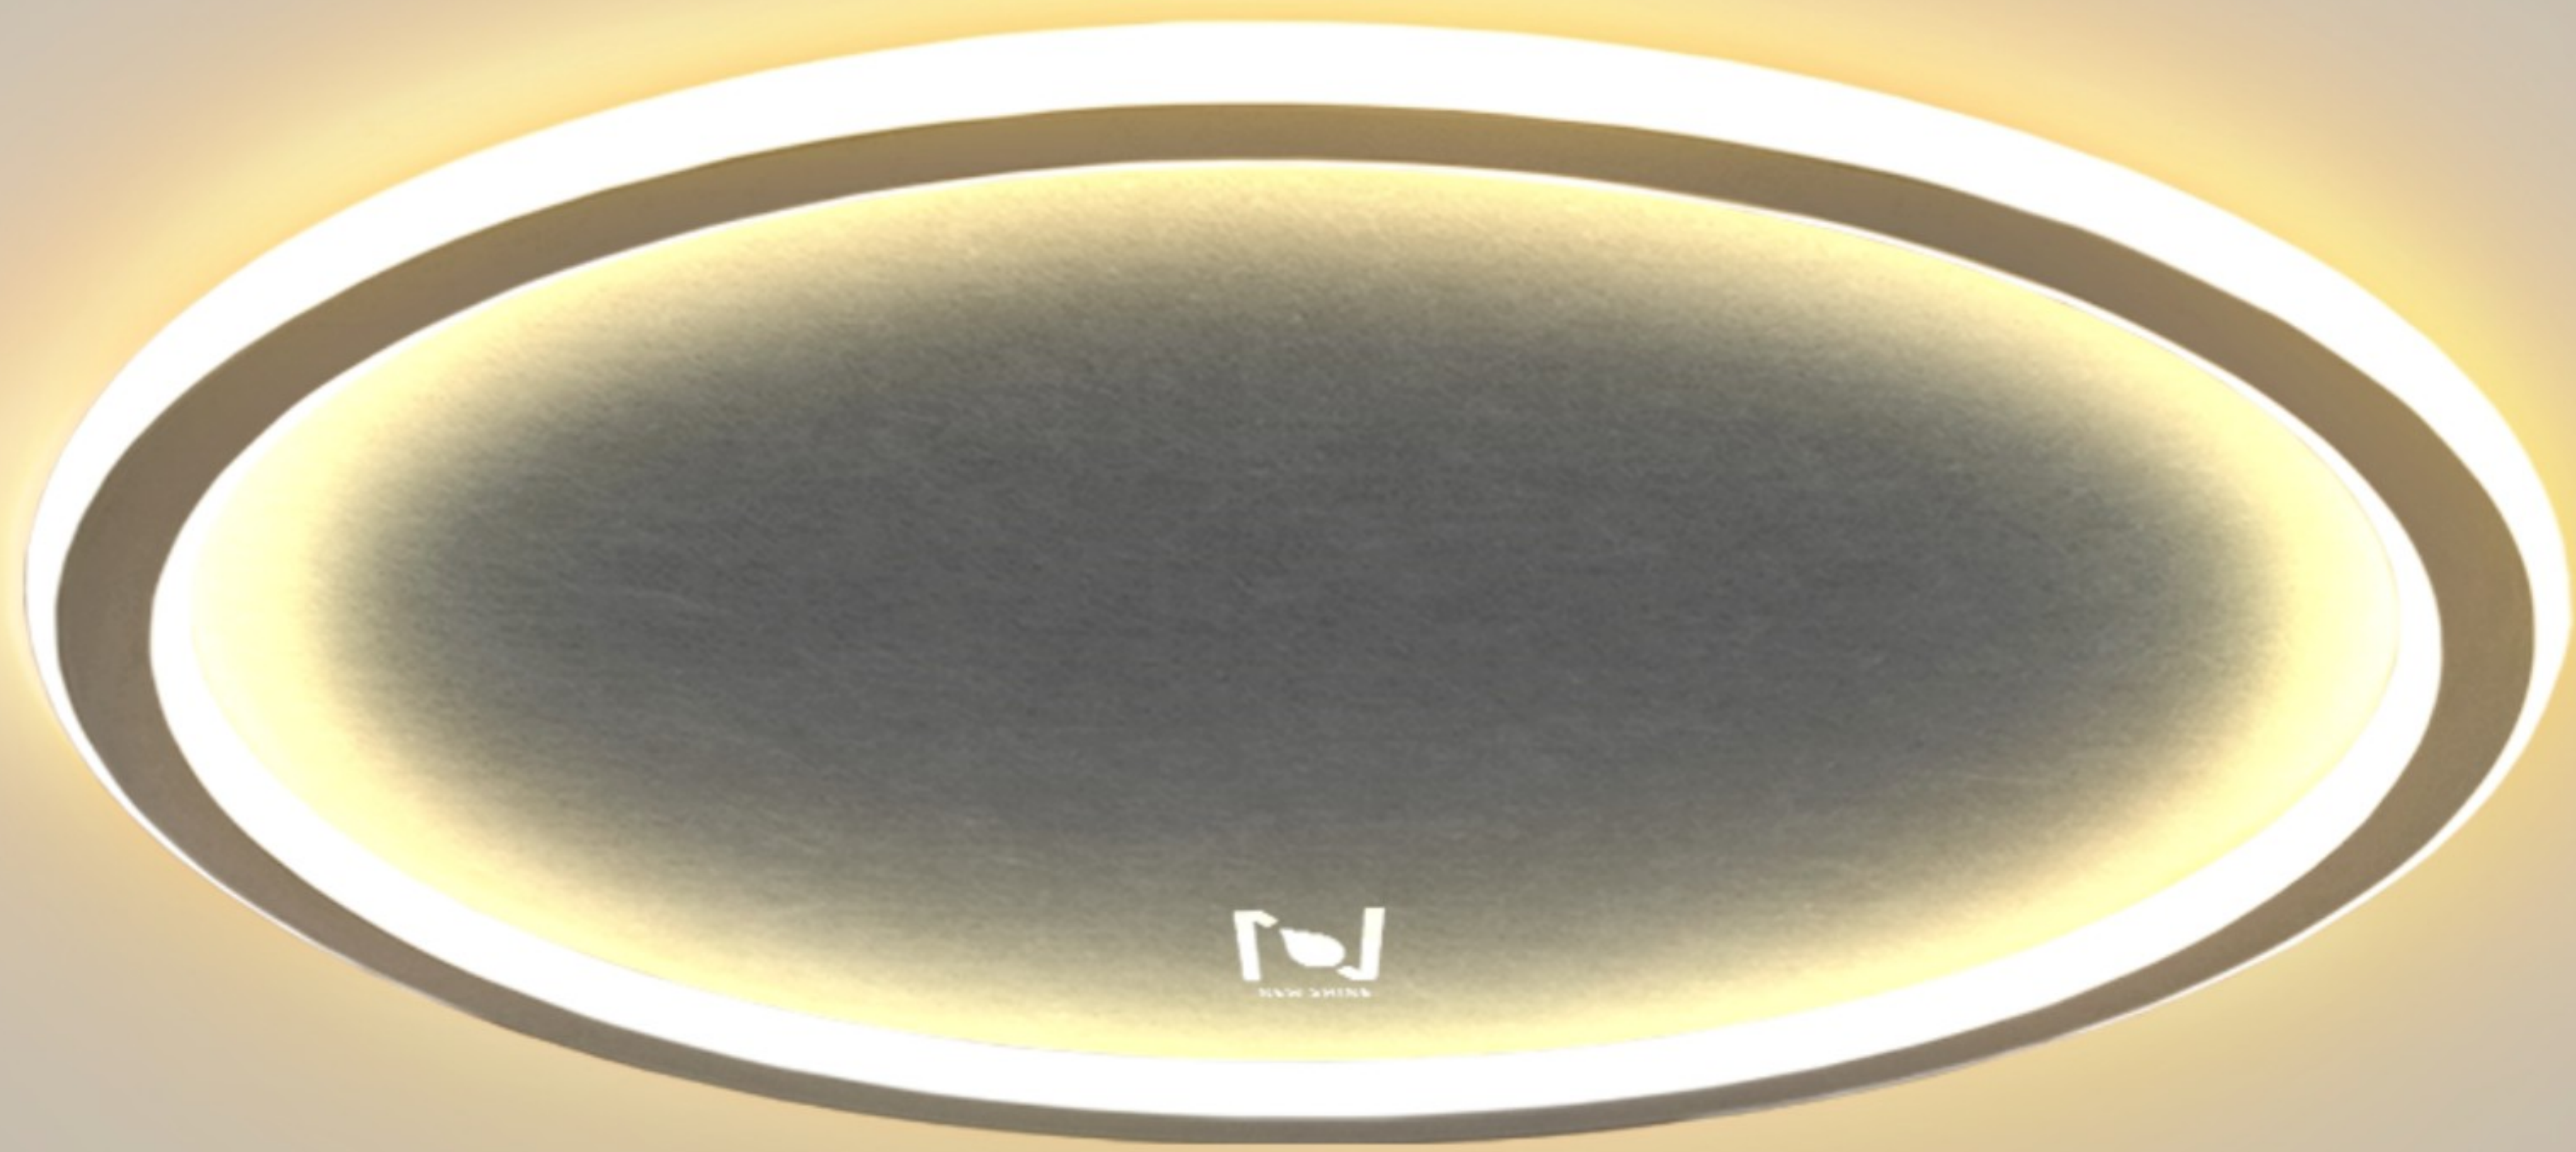



CLOUD SERIES

LIGHTING AND ACOUSTIC SOLUTION





Cloud series with a unique shape and proportions, widely use for general lighting applications. Available in multiple diameter sizes from 11.8" up to 47.2"; mounted and suspended, for optional light distributions to fit the scale, with acoustic version for optional.



OSRAM

SAMSUNG



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0213BS/BM-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	300	BS: suspended with 1.5m power cable and safety cable BM: surface mounted	Silicon+Alu	D300*18/*45	D11.8*0.71/*1.78
LL0213BS/BM-60W		60W									D400*18/*45	D15.7*0.71/*1.78
LL0213BS/BM-80W		80W									D600*18/*45	D23.6*0.71/*1.78
LL0213BS/BM-125W		125W									D900*18/*45	D35.4*0.71/*1.78
LL0213BS/BM-150W		150W									D1200*18/*45	D47.2*0.71/*1.78



Cloud series with a unique shape and proportions, widely use for general lighting applications. Available in multiple diameter sizes from 11.8" up to 47.2"; mounted and suspended, for optional light distributions to fit the scale, with acoustic version for optional.





Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, restaurant, public building, etc.



OSRAM SAMSUNG



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0214BS/BM-50W	AC220-240V or AC120-277V 50/60Hz	50W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	70	Samsung	300	BS: suspended with 1.5m power cable and safety cable BM: surface mounted	Silicon + Alu	300*300*18/*45	11.8*11.8*0.71/*1.78
LL0214BS/BM-60W		60W									400*400*18/*45	15.7*15.7*0.71/*1.78
LL0214BS/BM-90W		90W									500*500*18/*45	19.7*19.7*0.71/*1.78
LL0214BS/BM-125W		125W									500*900*18/*45	19.7*35.4*0.71/*1.78
LL0214BS/BM-150W		150W									1100*650*18/*45	43.3*25.6*0.71/*1.78



Cloud series with a unique shape and proportions, widely use for general lighting applications. Available in multiple diameter sizes from 11.8" up to 47.2"; mounted and suspended, for optional light distributions to fit the scale, with acoustic version for optional.





Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, restaurant, public building, etc.



OSRAM

SAMSUNG



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0214AS-40W	AC220-240V or AC120-277V 50/60Hz	40W	80 or 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	300	suspended with 1.5m power cable and safety cable	Silicon+Alu	300*300*18	11.8*11.8*0.71
LL0214AS-50W		50W									400*400*18	15.7*15.7*0.71
LL0214AS-72W		72W									500*500*18	19.7*19.7*0.71
LL0214AS-100W		100W									500*900*18	19.7*35.4*0.71
LL0214AS-150W		150W									1100*650*18	43.3*25.6*0.71
LL0214AM-40W	AC220-240V or AC120-277V 50/60Hz	40W	80 or 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	300	surface mounted	Silicon+Alu	300*300*45	11.8*11.8*1.78
LL0214AM-50W		50W									400*400*45	15.7*15.7*1.78
LL0214AM-72W		72W									500*500*45	19.7*19.7*1.78
LL0214AM-100W		100W									500*900*45	19.7*35.4*1.78
LL0214AM-150W		150W									1100*650*45	43.3*25.6*1.78



Cloud series with a unique shape and proportions, widely use for general lighting applications, Available in multiple diameter sizes from 11.8" up to 47.2"; mounted and suspended, for optional light distributions to fit the scale, with acoustic version for optional.




LL0213AS



LL0213AM



LL0213ASAC





LL0213AMAC

Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, restaurant, public building, etc.




OSRAM

SAMSUNG



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0213AS/AM-32W	AC220-240V or AC120-277V 50/60Hz	32W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	300	AS: suspended with 1.5m power cable and safety cable AM: surface mounted	Silicon+Alu	D300*18/*45	D11.8*0.71/*1.78
LL0213AS/AM-45W		45W									D400*18/*45	D15.7*0.71/*1.78
LL0213AS/AM-60W		60W									D600*18/*45	D23.6*0.71/*1.78
LL0213AS/AM-100W		100W									D900*18/*45	D35.4*0.71/*1.78
LL0213AS/AM-135W		135W									D1200*18/*45	D47.2*0.71/*1.78
LL0213AS/AMAC-32W	AC220-240V or AC120-277V 50/60Hz	32W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	300	AS: suspended with 1.5m power cable and safety cable AM: surface mounted	Silicon+Alu +polyester fiber	D300*28/*55	D11.8*1.1/*2.16
LL0213AS/AMAC-45W		45W									D400*28/*55	D15.7*1.1/*2.16
LL0213AS/AMAC-60W		60W									D600*28/*55	D23.6*1.1/*2.16
LL0213AS/AMAC-100W		100W									D900*28/*55	D35.4*1.1/*2.16
LL0213AS/AMAC-135W		135W									D1200*28/*55	D47.2*1.1/*2.16





Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, restaurant, public building, etc.



OSRAM

SAMSUNG



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0214ASAC-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	300	surface mounted	Silicon+Alu +polyester fiber	300*300*28	11.8*11.8*1.1
LL0214ASAC-50W		50W									400*400*28	15.7*15.7*1.1
LL0214ASAC-72W		72W									500*500*28	19.7*19.7*1.1
LL0214ASAC-100W		100W									500*900*28	19.7*35.4*1.1
LL0214ASAC-150W		150W									1100*650*28	43.3*25.6*1.1
LL0214AMAC-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥ 80 or ≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	300	suspended with 1.5m power cable and safety cable	Silicon+Alu +polyester fiber	300*300*55	11.8*11.8*2.16
LL0214AMAC-50W		50W									400*400*55	15.7*15.7*2.16
LL0214AMAC-72W		72W									500*500*55	19.7*19.7*2.16
LL0214AMAC-100W		100W									500*900*55	19.7*35.4*2.16
LL0214AMAC-150W		150W									1100*650*55	43.3*25.6*2.16



ARALED LIGHTING MEXICO SAS DE CV

www.auraled.mx

+52 998 147 90 72

